

# Product Environmental Profile

## Vigirex RH99M






## General information

<b>Representative product</b>	Vigirex RH99M -56173
<b>Description of the product</b>	The Vigirex RH99M is an earth leakage protection relays with an MA120 toroid senso, which is designed to detect and measure the earth leakage current in an electrical installation. The relay interrupts the supply of power to the supervised network and protects the personnel against direct and indirect contact; they also protect property against fire hazards.
<b>Functional unit</b>	Protect during 20 years people and premises at risk of fire or explosion with assigned voltage 220-240V by detecting and measuring the earth leakage current with sensitivity 0.3-30A.



## Constituent materials

**Reference product mass** 274.5 g including the product, its packaging and additional elements and accessories

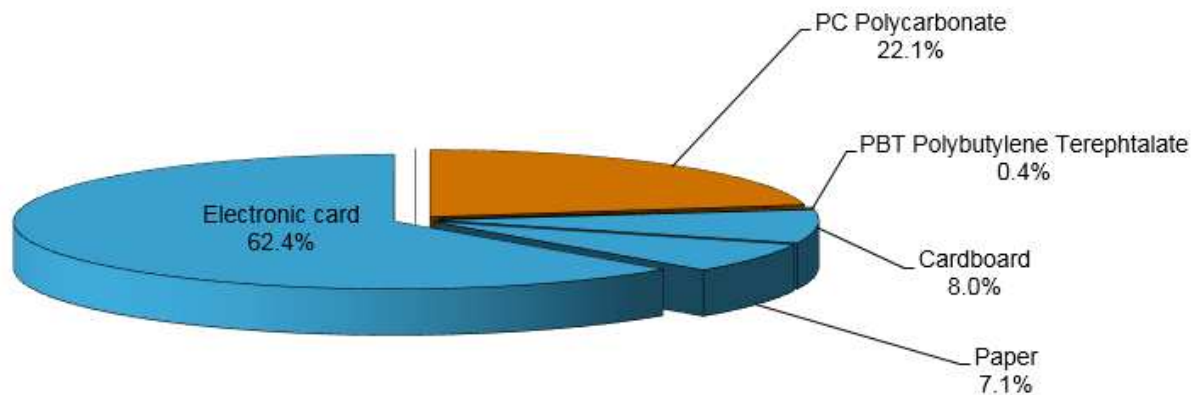

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Vigirex RH99M presents the following relevant environmental aspects


<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 41.6 g, consisting of cardboard(53%); paper(47%)
<b>Installation</b>	Ref 56173 does not require any installation operations
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains PCBA C1 (ASIC BOARD) RH..M VIGIREX (19.6 cm<sup>2</sup>):11.8g; PCBA B1 (SIDE BOARD) RH..M VIGIREX (18 cm<sup>2</sup>):5.3g PCBA A1 POWER SUPPLY 220-240 VAC RH M (37.7cm<sup>2</sup>):155.2g that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a></p> <p>Recyclability potential: <b>37%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>



## Environmental impacts

<b>Reference life time</b>	10 years			
<b>Product category</b>	Active product			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	The product is in active mode 100% of the time with power use of 4W for 10 years			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The Vigirex RH99M is an earth leakage protection relays with an MA120 toroid senso, which is designed to detect and measure the earth leakage current in an electrical installation. The relay interrupts the supply of power to the supervised network and protects the personnel against direct and indirect contact; they also protect property against fire hazards.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: France	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Vigirex RH99M - 56173						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to mineral resources depletion	kg Sb eq	2.62E-04	2.52E-04	0*	0*	9.42E-06	0*	
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.57E+00	6.92E-03	1.62E-04	0*	1.56E+00	0*	
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	6.30E-02	4.21E-03	3.72E-05	0*	5.86E-02	7.99E-05	
Contribution to global warming	kg CO <sub>2</sub> eq	2.13E+02	5.35E+00	3.54E-02	0*	2.07E+02	2.64E-01	
Contribution to ozone layer depletion	kg CFC11 eq	5.08E-05	5.24E-07	0*	0*	5.03E-05	9.12E-09	
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	7.55E-02	1.56E-03	1.15E-05	0*	7.39E-02	1.11E-05	
Resources use		Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	5.60E-01	2.06E-02	0*	0*	5.40E-01	1.27E-04	
Total Primary Energy	MJ	4.28E+03	8.71E+01	5.01E-01	0*	4.19E+03	5.94E-01	

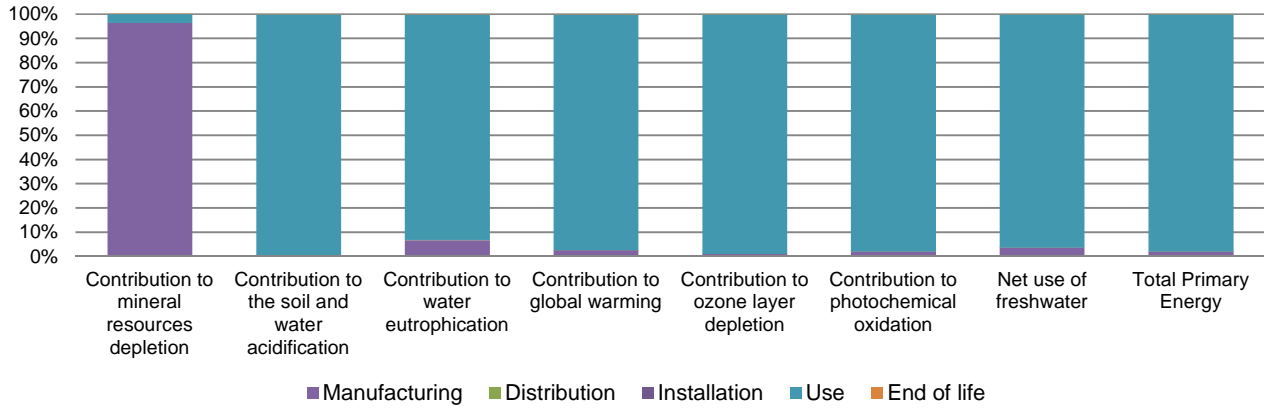

Optional indicators		Vigirex RH99M - 56173						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	2.21E+03	8.02E+01	4.98E-01	0*	2.13E+03	5.61E-01	
Contribution to air pollution	m <sup>3</sup>	9.58E+03	7.02E+02	1.51E+00	0*	8.87E+03	4.28E+00	
Contribution to water pollution	m <sup>3</sup>	9.56E+03	8.65E+02	5.82E+00	0*	8.68E+03	1.06E+01	
Resources use		Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	8.99E-04	8.99E-04	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	3.01E+02	7.82E-01	0*	0*	3.00E+02	0*	
Total use of non-renewable primary energy resources	MJ	3.98E+03	8.64E+01	5.00E-01	0*	3.89E+03	5.93E-01	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.00E+02	0*	0*	0*	3.00E+02	0*	
Use of renewable primary energy resources used as raw material	MJ	7.99E-01	7.99E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.97E+03	8.19E+01	5.00E-01	0*	3.89E+03	5.93E-01	
Use of non renewable primary energy resources used as raw material	MJ	4.41E+00	4.41E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories		Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.46E+00	8.68E-01	0*	4.20E-02	0*	5.54E-01	
Non hazardous waste disposed	kg	7.75E+02	1.48E+00	0*	0*	7.74E+02	0*	
Radioactive waste disposed	kg	6.32E-01	8.19E-04	0*	0*	6.31E-01	0*	
Other environmental information		Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.43E-01	1.44E-02	0*	4.14E-02	0*	8.76E-02	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	7.44E-02	9.62E-05	0*	0*	0*	7.43E-02	
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*	

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

*Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.*

Registration N°	ENVPEP060201EN_V2	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	11/2016	Supplemented by	PSR-0005-ed2-2016 03 29
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			

Schneider Electric Industries SAS

Country Customer Care Center: [www.schneider-electric.com/contact](http://www.schneider-electric.com/contact)

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP060201EN\_V2

© 2016 - Schneider Electric – All rights reserved

11/2016