


LV429345

auxiliary contact - 1 OC early-break - for
NSX100..250

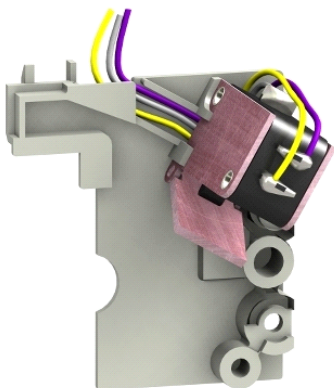

Main

Range of product	NSX100...250 NSX100...250 DC
Range	Compact
Device short name	Early-break contact
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	Compact - Compact NSX circuit breaker Compact - Compact NSX DC circuit breaker

Complementary

Auxiliary contacts type	Standard
Auxiliary contacts operation	Early-break
Mounting mode	Drawout
[Ith] conventional free air thermal current	6 A
[Ie] rated operational current	DC-12 : 6 A DC 24 V DC-12 : 0.6 A DC 110 V AC-12 : 6 A AC 50/60 Hz 110 V AC-12 : 6 A AC 50/60 Hz 220/240 V AC-12 : 6 A AC 50/60 Hz 24 V AC-12 : 6 A AC 50/60 Hz 380/440 V AC-12 : 6 A AC 50/60 Hz 48 V AC-12 : 6 A AC 50/60 Hz 480 V AC-12 : 6 A AC 50/60 Hz 660/690 V AC-15 : 0.1 A AC 50/60 Hz 660/690 V AC-15 : 1.5 A AC 50/60 Hz 480 V AC-15 : 2 A AC 50/60 Hz 380/440 V AC-15 : 4 A AC 50/60 Hz 220/240 V AC-15 : 5 A AC 50/60 Hz 110 V AC-15 : 6 A AC 50/60 Hz 24 V AC-15 : 6 A AC 50/60 Hz 48 V DC-12 : 0.3 A DC 250 V DC-12 : 2.5 A DC 48 V DC-14 : 0.03 A DC 250 V DC-14 : 0.05 A DC 110 V DC-14 : 0.2 A DC 48 V DC-14 : 1 A DC 24 V
Minimum load	100 mA at 24 V DC

Environment

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0818 - Schneider Electric declaration of conformity
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.