



Easy Series Automation and Control Essentials Catalog

Everything you need for your fit-for-purpose control panels

schneider-electric.com

Life Is On

Schneider
Electric




The Essentials for your control panels

Within this catalog you'll find all the components you need to deliver high core performance focused industrial control panels and machines.

The catalog will help you build your fit-for-purpose equipment faster and boost the efficiency of your industrial automation business.

New 2019 product highlights

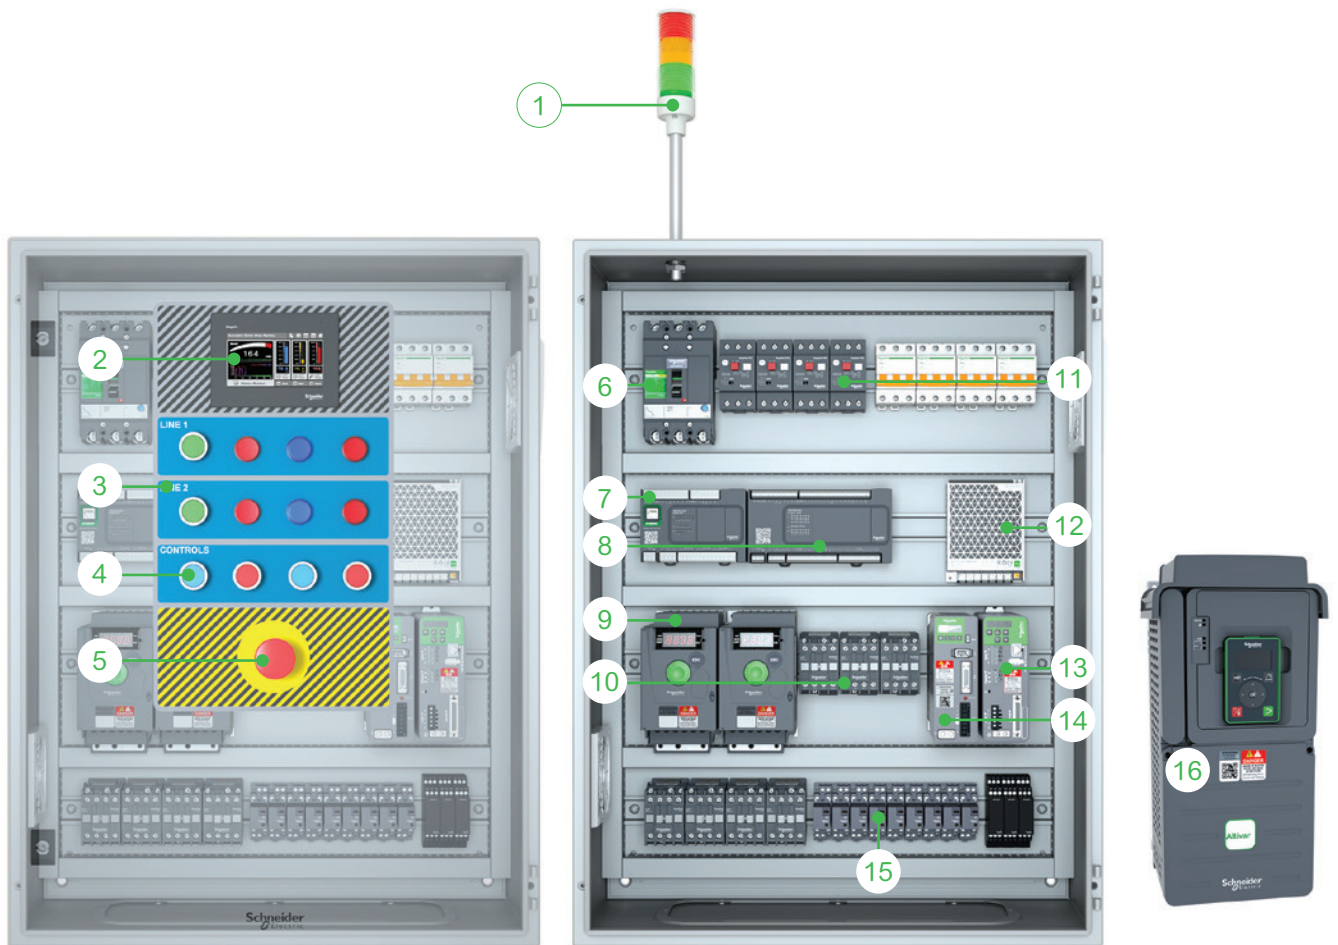

- | | | | |
|---|--|----|---|
| 1 | Easy Harmony XVG Tower Light | 9 | Easy Altivar ATV 310 Variable Speed Drives |
| 2 | Easy Harmony ET6 Touch screen panel | 10 | EasyPact TVS Contactor |
| 3 | Harmony Customizable Legend Panel | 11 | EasyPact TVS Motor Protection Circuit Breaker |
| 4 | Easy Harmony XA2 Pushbuttons | 12 | Easy Modicon ABL2 Power Supply |
| 5 | Easy Harmony XA2 Emergency Switching off Pushbuttons | 13 | Easy Lexium 26 Servo |
| 6 | EasyPact CVS Protection of Distribution System | 14 | Easy Lexium 16 Servo |
| 7 | Easy Modicon M200 Logic Controller | 15 | Easy Harmony RXM Electromechanical Relays |
| 8 | Easy Modicon M100 Logic Controller | 16 | Easy Altivar ATV 610 Variable Speed Drives |

Make your everyday work smoother and easier

As a machine builder or panel builder, you need a reliable source of products to deliver high core performance focused equipment and services on time.

When working with Schneider, you've got that covered.

See for yourself!

Count on a reliable partner for your business

With Schneider Electric, a world leader in automation and control, you get reliable, robust, and affordable products for you and your customers.

Our global network of local distributors ensures high product availability and quick delivery times. So you can easily meet your deadlines.



When just enough is just right!

Save time on component selection with this catalog of automation and control essentials. Use our handy online selectors and configurators to easily find the best solution for your specific application and all the technical information you need.

Our tools help machine builders and panel builders improve the efficiency of their everyday work and build fit-for-purpose equipment with high core performance quicker.

Take advantage of learning opportunities

Gain access to our diverse learning resources, providing practical knowledge and tips, and open new opportunities for your business.

Explore the manuals, tutorials, “how to” videos, and online courses to broaden your skills and make your daily work faster and simpler.

- 1 Go to product selectors and configurators
- 2 Download the digital catalog
- 3 Explore our learning resources





Get all the products
you need from a distributor
close to you

General contents

01	Easy Harmony control and signaling.....	6
02	Easy Harmony ET6 touch screen panel.....	12
03	Easy Altivar variable speed drives.....	16
04	Easy Harmony electromechanical relays.....	24
05	Easy Modicon ABL2 power supplies.....	26
06	Easy Lexium motion control.....	28
07	Easy Modicon Logic controllers.....	46
08	Easy Sensors - Limit switch.....	52



01. Easy Harmony
pushbuttons, switches, pilot
lights and signaling devices

Easy Harmony XVG Ø 60 monolithic tower lights



1

1 With base mounting							
Light source		LED for steady light					
Colors (1)		● Red, ● Green		● Red, ● Amber, ● Green		● Red, ● Amber, ● Green, ● Blue	
Voltage		24 VAC/VDC	220~240VAC	24 VAC/VDC	220~240VAC	24 VAC/VDC	
Reference	Without buzzer, IP 53	XVGB2W	XVGM2W	XVGB3W	XVGM3W	XVGB4W	
	With buzzer, IP 42	XVGB2SW	XVGM2SW	XVGB3SW	XVGM3SW	XVGB4SW	
2 With direct aluminium tube mounting							
Light source		LED for steady light					
Colors (1)		● Red, ● Green		● Red, ● Amber, ● Green		● Red, ● Amber, ● Green, ● Blue	
Voltage		24 VAC/VDC	220~240VAC	24 VAC/VDC	220~240VAC	24 VAC/VDC	
Reference	Without buzzer, IP 23	XVGB2T	XVGM2T	XVGB3T	XVGM3T	XVGB4T	
	With buzzer, IP 23	XVGB2ST	XVGM2ST	XVGB3ST	XVGM3ST	XVGB4ST	
3 With aluminium tube mounting and L-bracket							
Light source		LED for steady light					
Colors (1)		● Red		● Red, ● Green		● Red, ● Amber, ● Green, ● Blue	
Voltage		24 VAC/VDC	220~240VAC	24 VAC/VDC	220~240VAC	24 VAC/VDC	
Reference	Flashing light with buzzer	XVGB1SFA	XVGM1SFA	-	-	-	-
	Without buzzer, IP 23	XVGB1A	XVGM1A	XVGB2	XVGM2	XVGB3	XVGB4
	With buzzer, IP 23	XVGB1SA	XVGM1SA	XVGB2S	XVGM2S	XVGB3S	XVGB4S
4 With aluminium tube mounting and fixing plate							
Light source		LED for steady light					
Colors (1)		● Red, ● Green		● Red, ● Amber, ● Green		● Red, ● Amber, ● Green, ● Blue	
Voltage		24 VAC/VDC	220~240VAC	24 VAC/VDC	220~240VAC	24 VAC/VDC	
Reference	Without buzzer, IP 53	XVGB2H	XVGM2W	XVGB3H	XVGM3H	XVGB4H	
	With buzzer, IP 42	XVGB2SH	XVGM2SW	XVGB3SH	XVGM3SH	XVGB4SH	
5 With aluminium tube mounting and foldable bracket							
Light source		LED for steady light					
Colors (1)		● Red		● Red, ● Green		● Red, ● Amber, ● Green, ● Blue	
Voltage		24 VAC/VDC	220~240VAC	24 VAC/VDC	220~240VAC	24 VAC/VDC	
Reference	Flashing light with buzzer	XVGB1SMFA	XVGM1SMFA	-	-	-	-
	Without buzzer, IP 53	XVGB1MA	XVGM1MA	XVGB2M	XVGM2M	XVGB3M	XVGM3M
	With buzzer, IP 42	XVGB1SMA	XVGM1SMA	XVGB2SM	XVGM2SM	XVGB3SM	XVGM3SM
6 Accessories (for association)							
Color		● White					
Unit type		Folding mounting bracket for support tube mounting			Wall mounting bracket		
Reference		XVGZ02 (2)			XVMZ02W (3)		

(1) The colors are listed in the same order as the mounting order of the illuminated units (from top to bottom).

(2) Compatible with XVGB●H, XVGB●SH, XVGB●M●, XVGB●SM●, XVGM●H, XVGM●SH, XVGM●M●, XVGM●SM.

(3) Compatible with XVGB●T, XVGB●ST, XVGM●T, XVGM●ST.

Easy Harmony XA2 plastic pushbuttons



1

1 Pushbuttons with flush push, unmarked

Color	○ White	● Black	● Green	● Red	● Yellow	● Blue	
Contact	NO			NC	NO		
Connection	Screw clamp terminals						
Complete product for standard mounting	Spring-return	XA2EA11	XA2EA21	XA2EA31	XA2EA42	XA2EA51	XA2EA61
	Push-push	-	XA2EH021	XA2EH031	XA2EH042	XA2EH051	-
Contact	NO+NC						
	-	XA2EA25	XA2EA35	XA2EA45	-	-	
Contact	NO						
	-	-	-	XA2EA41	-	-	

2 Pushbuttons with flush push, marked

Color	○ White	● Black	● Green	● Red	● Red	
Marking	A	↑	"I" (white)	"O" (white)	"STOP" (white)	
Contact	NO			NC	NC	
Connection	Screw clamp terminals					
Complete product for standard mounting	XA2EA3341	XA2EA3351	XA2EA3311	XA2EA6511	XA2EA4322	XA2EA4342



3 Trigger action Emergency stop mushroom head pushbuttons

Color	● Red				
Diameter of head	Ø 40	Ø 30	Ø 40	Ø 60	Ø 30
Contact	NC Push-pull	NC Turn to release			
Connection	Screw clamp terminals				
Complete product for standard mounting	XA2ET42	XA2ES442	XA2ES542	XA2ES642	-

4 Mushroom head pushbuttons, spring return

Color	● Black	● Green	● Red	● Yellow	● Black
Diameter of head	Ø 40	Ø 40	Ø 40	Ø 40	Ø 60
Contact	NO		NC	NO	
Connection	Screw clamp terminals				
Complete product for standard mounting	XA2EC21	XA2EC31	XA2EC42	-	XA2ER21



5 Selector switches

Positions	2 ∨	2 ∩	2 ∨	3 ∨	3 ∩	
Contact	NO		NO + NC	2 NO		
Connection	Screw clamp terminals					
Complete product for standard mounting	Standard handle	XA2ED21	XA2ED41	XA2ED25	XA2ED33	XA2ED53
	Long handle	XA2EJ21	-	XA2EJ25	XA2EJ33	XA2EJ53

6 Key switches

Positions	2 ∨	2 ∩	2 ∩	3 ∩	3 ∩	3 ∩	
Contact	NO	2 NO					
Connection	Screw clamp terminals						
Complete product for standard mounting	Key switch (No. 455)	XA2EG21	XA2EG43	XA2EG63	XA2EG73	XA2EG33	XA2EG03

Easy Harmony XA2 plastic pushbuttons




1 Pilot lights with integral LED

Color	White	Green	Red	Amber	Blue	Yellow	Bi-color(Green/Red)	
Connection	Screw clamp terminals							
Complete product for standard mounting	12 V AC/DC	XA2EVJ1LC	XA2EVJ3LC	XA2EVJ4LC	XA2EVJ5LC	XA2EVJ6LC	XA2EVJ8LC	-
	24 V AC/DC	XA2EVB1LC	XA2EVB3LC	XA2EVB4LC	XA2EVB5LC	XA2EVB6LC	XA2EVB8LC	XA2EVB34LC
	30 V AC/DC	XA2EVC1LC	XA2EVC3LC	XA2EVC4LC	XA2EVC5LC	XA2EVC6LC	XA2EVC8LC	-
	48 V AC/DC	XA2EVE1LC	XA2EVE3LC	XA2EVE4LC	XA2EVE5LC	XA2EVE6LC	XA2EVE8LC	-
	63.5 V AC/DC	XA2EVVE1LC	XA2EVVE3LC	XA2EVVE4LC	XA2EVVE5LC	XA2EVVE6LC	XA2EVVE8LC	-
	110 V AC/DC	XA2EVF1LC	XA2EVF3LC	XA2EVF4LC	XA2EVF5LC	XA2EVF6LC	XA2EVF8LC	-
	220...230 V AC	XA2EVM1LC	XA2EVM3LC	XA2EVM4LC	XA2EVM5LC	XA2EVM6LC	XA2EVM8LC	XA2EVM34LC
	220 V DC	XA2EVMD1LC	XA2EVMD3LC	XA2EVMD4LC	XA2EVMD5LC	XA2EVMD6LC	XA2EVMD8LC	-
380...400 V AC	XA2EVQ1LC	XA2EVQ3LC	XA2EVQ4LC	XA2EVQ5LC	XA2EVQ6LC	XA2EVQ8LC	-	

2 Indicators with Integral LEDs

Connection	Screw clamp terminals				
Type	-	Isolation switch indicator	Circuit breaker indicator	Ground Indicator	
Complete product for standard mounting	110 V AC	-	XA2EVF34SPC	XA2EVM34SPC	XA2EVQ34SPC
	220 V AC	-	XA2EVF34BPC	XA2EVM34BPC	XA2EVQ34BPC
(Green/Red)	380 V AC	-	XA2EVF34GPC	XA2EVM34GPC	XA2EVQ34GPC

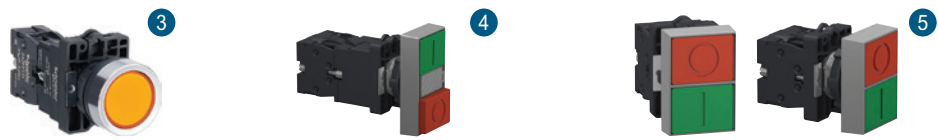

3 Illuminated pushbuttons with integral LED

Color	White	Green	Red	Yellow	Blue	Red	
Contact	NO					NC	
Connection	Screw clamp terminals						
Complete product for standard mounting	24 V AC/DC	XA2EW31B1	XA2EW33B1	XA2EW34B1	XA2EW35B1	XA2EW36B1	XA2EW34B2
	220...230 V AC	XA2EW31M1	XA2EW33M1	XA2EW34M1	XA2EW35M1	XA2EW36M1	XA2EW34M2
	380...400 V AC	XA2EW31Q1	-	-	-	-	XA2EW34Q2

4 Double-headed pushbuttons, spring return with pilot light block

Complete product for standard mounting	24 VAC/DC	XA2EW7L3741B5	-	-
(Green/Red)	220...230 V AC	XA2EW7L3741M5	-	-

5 Double-headed pushbuttons, spring return without pilot light block

Complete product for standard mounting	XA2EA7A3415	-	-	-
(Green/Red)	-	-	-	-

Accessories for Easy Harmony XA2 plastic pushbuttons



1

3 Contact functions (for all XA2 pushbuttons and switches)

Type	Contact function	
Contact	NO	NC
Connection	Screw clamp terminals	
Reference	ZA2EE101	ZA2EE102

4 Bulbs with BA 9s base fitting and associated accessories

Color	<input type="radio"/> White	<input type="radio"/> Green	<input type="radio"/> Red	<input type="radio"/> Yellow	<input type="radio"/> Blue
Voltage	24 VAC/VDC				
Reference	DL1LED241	DL1LED243	DL1LED244	DL1LED245	DL1LED246

5 Bezel tool

Application	Tightening head fixing nut
Reference	ZB5AZ905

6 Anti-rotation plate

Application	Prevents head from rotation
Reference	ZB5AZ902



02. Easy Harmony ET6

Easy Harmony ET6 Essential Touch-screen Panels



Easy Harmony ET6 SIO models with IP65 degree of protection

Screen size	7" ¹	10.1" ²
Screen resolution (pixels)	800 x 480 WVGA	1024 x 600 WSVGA
Touch screen or keypad	Touch screen	
Software	Vijeo Designer Basic V1.2 or above	
Memory capacity	User data memory	256 MB (for system data , screen data and logging data storage)
	Backup memory	128 KB
	Local logging data storage	max. 32MB
Communication	Serial line	9-way male SUB-D, RS-232C (COM1) + 9-way male SUB-D, RS-422/RS485 (COM2)
	USB connection	1 micro-B connector
Operating temperature	0...50 °C	
Industrial certifications	CE, UL/cUL 61010-2-201, KC, EAC, UKCA, RCM, European RoHS/China RoHS, REACH, WEEE	
Cut-out (mm)	190 x 135	255 x 185
Dimensions (mm)	205.5 x 150.5 x 45	270.5 x 200.5 x 47
Reference	HMIET6401	HMIET6501



Easy Harmony ET6 ETH models with IP65 degree of protection

Screen size	7" ³	10.1" ⁴	12.1" ⁵	15.6" ⁶
Screen resolution (pixels)	800 x 480 WVGA	1024 x 600 WSVGA	1280 x 800 WXGA	1366 x 768 FWXGA
Touch screen or keypad	Touch screen			
Software	Vijeo Designer Basic V1.2 or above			
Memory capacity	User data memory	256 MB (for system data , screen data and logging data storage)		
	Backup memory	128 KB		
	Local logging data storage	max. 32MB		
Communication	Ethernet port	Ethernet 10/100BASE-TX		
	Serial line	9-way male SUB-D, RS-232C (COM1) + 9-way male SUB-D, RS-422/RS485 (COM2)		
	USB connection	1 type A connector + 1 micro-B connector		
Operating temperature	0...50 °C			
Industrial certifications	CE, UL/cUL 61010-2-201, KC, EAC, UKCA, RCM, European RoHS, China RoHS, REACH, WEEE			
Cut-out (mm)	190 x 135	255 x 185	295 x 217	394 x 250
Dimensions (mm)	205.5 x 150.5 x 45	270.5 x 200.5 x 47	310.5 x 232.5 x 50	412 x 268 x 50
Reference	HMIET6400	HMIET6500	HMIET6600	HMIET6700


Easy Harmony ET6 - Programming Software and Accessories



Vijeo Designer Basic, programming software for Easy Harmony ET6 panels

Compatibility	All Easy Harmony ET6 panels (required V1.2 or above)
Type of Vijeo Designer license	Single-station Build Time
Number of stations	1
Type of support	DVD
License duration	Unlimited
Reference	To download this software, visit Schneider Electric web site, Vijeo Designer Basic

2



Spare parts

Description	Set of fixing screws (24 pieces/set) ¹	Set of fixing screws (2 pieces/set) ²	Power supply connector (5 pieces/set) ³
Compatibility	Easy Harmony ET6 7~12inch models	Easy Harmony ET6 15inch model	All Easy Harmony ET6
Reference	HMIZGFIX3	HMIZSFIXT1	HMIZGPWS1



Connection accessories

Connection type	1 USB type A connector (male) + 1 USB micro-B connector (male) ³	1 USB micro-B connector (male) + 1 USB micro-B connector (female) ⁴	1 USB type A connector (male) + 1 USB type A connector (female) ⁵
Description	Enables connection of a PC (USB type A port) to Easy Harmony ET6 terminals (USB micro-B port, all models) in order to transfer applications developed with Vijeo Designer Basic	Extension cable that attaches USB (micro-B) interface to the front panel of the cabinet	Extension cable that attaches USB (type A) interface to the front panel of the cabinet
Cable length (m)	1.8	1	1.8
Reference	HMIZG936	HMIZSUSBB2	XBTZGUSB



Cables for connecting Easy Harmony ET6 panels to Schneider Electric products

Range compatibility	Modicon Twido, Micro, Premium	Modicon M221, M241, M251, M262, M340, M218, M238, M258	Modicon M100, M200	TeSys U/T starters, Altivar drives, Altistart starters, Lexium motion control, Preventa XPS MC
Connection type	1 male connector mini-DIN, 8 pins + 1 female connector 9-way Sub-D ⁷	1 male connector RJ45 + 1 female connector 9-way Sub-D ⁸	1 female connector 9-way Sub-D + 1 flying leads at other end ⁹	1 male connector RJ45 + 1 female connector 9-way Sub-D ⁸
Interface	RS 485			
Communication protocol	Modbus	-	-	Modbus
Compatibility	All Easy Harmony GXU panels			
Cable length (m)	2.5			
Reference	XBTZ9018	XBTZ9008	XBTZG9722	XBTZ9008

Easy Harmony ET6 - Accessories



Cables for third-party PLCs							
Third-party PLCs	Mitsubishi, Melsec			Omron, Sysmac		Siemens, Simatic	Customizable cables
Compatibility	All Easy Harmony ET6 models						
Connection cable	Q Link (SIO)	Q CPU (SIO)	FX (CPU)	Link (SIO)	FINS (SIO)	MPI port, S7 200 S7 300/400	RS 422
Connection type	9-way SUB-D/ 9-way SUB-D 1	9-way SUB-D/mini-DIN 2		9-way SUB-D/ 25-way SUB-D 3	9-way SUB-D/ 9-way SUB-D 1		9-way SUB-D/ flying leadsat other end 4
Interface	RS 232C		RS 422	RS 232C		RS 485	RS 422
Cable length (m)	5						
Reference	XBTZG9772	XBTZG9774	XBTZG9775	XBTZG9731	XBTZG9740	XBTZG9740 (1)	XBTZG9722

(1) Customized cable with Siemens PB connector 6ES7972-0Bx12-0XA0



Connecting Easy Harmony ET6 panels via Modbus serial link	
Description	Modbus serial link Power supply connector
Compatibility	All Easy Harmony ET6 models
Tap-off units	8-port Modbus splitter box LU9GC32-porttap junctionTWDXCAISO, and TWDXCAT3RJ
Communication protocol	Modbus
Connection type	1 male connector RJ45/9-way SUB-D
Interface	RS 485
Cable length (m)	2.5
Reference	XBTZ9008





03. Easy Altivar variable speed drives

Easy Altivar 610 - IP 20 drives (Power range from 0.75 kW to 160 kW)



Three-phase supply voltage: 380...460 V 50/60 Hz, with integrated category C3 EMC filter

ND: Normal duty (2), HD: Heavy duty (3)			ND	HD	ND	HD	ND	HD	ND	HD	ND	HD
Motor (1)	Power indicated on rating plate	kW	0.75	0.37	1.5	0.75	2.2	1.5	3	2.2	4	3
		HP	1	0.5	2	1	3	2	4	3	5	4
Easy Altivar 610	Max. continuous output current (1)		2.2	1.5	4.0	2.2	5.6	4.0	7.2	5.6	9.3	7.2
Dimensions: W x H x D (mm)	EMC plate not mounted (mm)		145 x 297 x 203 ①									
Reference			ATV610U07N4		ATV610U15N4		ATV610U22N4		ATV610U30N4		ATV610U40N4	

ND: Normal duty (2), HD: Heavy duty (3)			ND	HD	ND	HD	ND	HD	ND	HD	ND	HD
Motor (1)	Power indicated on rating plate	kW	5.5	4	7.5	5.5	11	7.5	15	11	18.5	15
		HP	7.5	5	10	7.5	15	10	20	15	25	20
Easy Altivar 610	Max. continuous output current (1)		12.7	9.3	15.8	12.7	23.5	16.5	31.7	23.5	39.2	31.7
Dimensions: W x H x D (mm)	EMC plate not mounted (mm)		145 x 297 x 203 ①				171 x 360 x 233 ②				211 x 495 x 232 ③	
Reference			ATV610U55N4		ATV610U75N4		ATV610D11N4		ATV610D15N4		ATV610D18N4	

ND: Normal duty (2), HD: Heavy duty (3)			ND	HD	ND	HD	ND	HD	ND	HD	ND	HD
Motor (1)	Power indicated on rating plate	kW	22	18.5	30	22	37	30	45	37	55	45
		HP	30	25	40	30	50	40	60	50	75	60
Easy Altivar 610	Max. continuous output current (1)		46.3	39.2	61.5	46.3	74.5	59.6	88	74.5	106	88
Dimensions: W x H x D (mm)	EMC plate not mounted (mm)		211 x 495 x 232 ③		226 x 613 x 271 ④				290 x 762 x 323 ⑤			
Reference			ATV610D22N4		ATV610D30N4		ATV610D37N4		ATV610D45N4		ATV610D55N4	

ND: Normal duty (2), HD: Heavy duty (3)			ND	HD	ND	HD	ND	HD	ND	HD	ND	HD
Motor (1)	Power indicated on rating plate	kW	75	55	90	75	110	90	132	110	160	132
		HP	100	75	125	100	149	125	178	149	216	178
Easy Altivar 610	Max. continuous output current (1)		145	106	173	145	211	173	250	211	302	250
Dimensions: W x H x D (mm)	EMC plate not mounted (mm)		290 x 762 x 323 ⑤				320 x 852 x 390 ⑥					
Reference			ATV610D75N4		ATV610D90N4		ATV610C11N4		ATV610C13N4		ATV610C16N4	

- (1) These values are given for a nominal switching frequency of 4 kHz up to ATV610D45N4, or 2.5 kHz for ATV610D55N4...C16N4 for use in continuous operation. The switching frequency is adjustable from 2...12 kHz up to ATV610D45N4, or from 1...8 kHz for ATV610D55N4...C16N4. Above 2.5 or 4 kHz (depending on the rating), the drive will automatically reduce the switching frequency in the event of an excessive temperature rise. For continuous operation above the nominal switching frequency, derate the nominal drive current (see the derating curves on our website).
- (2) Values given for applications requiring a slight overload (up to 110 % for 60 s or 120% for 20 s).
- (3) Values given for applications requiring a slight overload (up to 150 % for 60 s).
- (4) With IP21 conformity kit.

Easy Altivar 610 - Accessories for mounting of variable speed drives



Kit for IP 21 conformity		
For use with variable speed drives		
Power	kW	110...160
	HP	149...216
Reference		VW3A9704

Easy Altivar 610 - Configuration and runtime tools, Communication buses and networks



Plain text display terminal

Degree of protection	IP21
Display type	Backlit LCD screen white
Pixel resolution	128 x 64
Reference	VW3A1113



Remote mounting kit

Type of product	Remote mounting kit for plain text display terminal 1	Tightening tool for remote mounting kit 2	Remote mounting cordset (equipped with 2 RJ45 connectors) 3			
Degree of protection	IP20	–	–	–	–	–
Length (m)	–	–	1	3	5	10
Connector type	–	–	RJ45			
Reference	VW3A1114	ZB5AZ905	VW3A1104R10	VW3A1104R30	VW3A1104R50	VW3A1104R100



I/O modules (option)

I/O type	Digital inputs	6	–
	Digital outputs	2	–
	Analog inputs	2 (1)	–
	Relay outputs	–	3 (2)
Reference		VW3A3203	VW3A3204



PROFIBUS DP V1 optional communication module

Electrical connection	1 female connector SUB-D 9
Transmission rate	9.6 kbps...12 Mbps
Display type	1 LED for RUN, 1 LED for bus fault
Bus profile	PROFIdrive, CiA 402
Reference	VW3A3607

(1) Differential analog inputs configurable via software as current (0-20 mA/4-20 mA) or probe (PTC, PT100, or 2-wire or 3-wire PT1000) inputs. When configured as PTC probe inputs, they must never be used to protect an ATEX motor in applications in explosive atmospheres. Please refer to the ATEX guide on our website.
(2) NO contacts.

Easy Altivar 310 - IP 20 drives (380...460 V 50/60 Hz)



Three-phase supply voltage: 380...460 V 50/60 Hz, without EMC filter										
Motor	Power indicated on rating plate (1)	HD	kW	0.37	0.75	1.5	22	3	4	5.5
			HP	0.5	1	2	3	4	5	7.5
		ND	kW					4	5.5	7.5
HP						5	7.5	10		
Easy Altivar 310	Max. continuous output current (1)	HD	1.5	2.3	4.1	5.5	7.1	9.5	12.6	
		ND					8.9	12.1	16	
Dimensions: W x H x D (mm)			72 x 143 x 130	72 x 143 x 140	105 x 143 x 151	105 x 143 x 151	140 x 184 x 151	140 x 184 x 151	140 x 184 x 151	
Reference			ATV310H037N4E	ATV310H075N4E	ATV310HU15N4E	ATV310HU22N4E	ATV310HU30N4E	ATV310HU40N4E	ATV310HU55N4E	

Motor	Power indicated on rating plate	HD	kW	7.5	11	15	18.5	22
			HP	10	15	20	25	30
		ND	kW	11	15	18.5	22	30
			HP	15	20	25	30	40
Easy Altivar 310	Max. continuous output current	HD	17	24	33	39	46	
		ND	22.8	30	36	43	60	
Dimensions: W x H x D (mm)			150 x 232 x 171	150 x 232 x 171	180 x 330 x 191	180 x 330 x 191	180 x 390 x 212	
Reference			ATV310HU75N4E	ATV310HD11N4E	ATV310HD15N4E	ATV310HD18N4E	ATV310HD22N4E	

(1) These values are given for a nominal switching frequency of 4 kHz, for use in continuous operation. If operation above 4 kHz needs to be continuous, the nominal drive current should be derated by 10% for 8 kHz and 20% for 12 kHz.

Three-phase supply voltage: 380...460 V 50/60 Hz, with C3 EMC filter						
Motor	Power indicated on rating plate	HD	kW	15	18.5	22
			HP	20	25	30
		ND	kW	18.5	22	30
			HP	25	30	40
Easy Altivar 310	Max. continuous output current	HD	33	39	46	
		ND	36	43	60	
Dimensions: W x H x D (mm)			180 x 330 x 191	180 x 330 x 191	180 x 390 x 212	
Reference			ATV310HD15N4EF	ATV310HD18N4EF	ATV310HD22N4EF	

(1) These values are given for a nominal switching frequency of 4 kHz, for use in continuous operation. If operation above 4 kHz needs to be continuous, the nominal drive current should be derated, details please refer to user manual.



Easy Altivar 310 - Configuration tools



Simple Loader, Multi-Loader configuration tools and associated cable

Description	Simple Loader tool 7 For duplicating one drive configuration on another drive. The drives must be powered-up.	Multi-Loader tool 8 For copying a configuration on a PC or drive and duplicating it on another drive. The drives do not need to be powered-up.	Cordset for Multi-Loader tool 9 For connecting the Multi-Loader tool to the Easy Altivar 310 drive in its packaging.
Kit composition	Simple loader tool 1 cordset with 2 connectors RJ45	Multi loader tool 1 adaptor RJ45 female/female 4 batteries AA/LR6 1.5 V 1 cordset with 2 connectors RJ45 1 memory card SD 2 Go 1 cordset with 1 connector USB type A and 1 connector USB type mini B	Equipped with a non-locking RJ45 connector with special mechanical catch on the drive end and an RJ45 connector on the Multi-Loader end.
For use with	ATV310H●●●N4E	ATV310H●●●N4E	ATV310H●●●N4E in its packaging
Reference	VW3A8120	VW3A8121	VW3A8126

Remote display terminals and associated cordsets

Description	Remote display terminals 10 For fixing the Human-Machine interface on an enclosure door with IP 54 or IP 65 degree of protection. A remote-fixing cordset VW3A1104R●● is also required.		Remote-fixing cordsets 11 Equipped with 2 RJ45 connectors. For connecting the VW3 A1006 or VW3A1007remote display terminal to the Easy Altivar 310 drive.	
For use with	ATV310H●●●N4E	ATV310H●●●N4E	ATV310H●●●N4E	ATV310H●●●N4E
Degree of protection	IP 54	IP 65	-	
Dimensions: W x H x D (mm)	50 x 70 x 22.7	66 x 106 x 26.7	Length: 1 m/3.28 ft	Length: 3 m/9.84 ft
Reference	VW3A1006	VW3A1007	VW3A1104R10	VW3A1104R30

3

Easy Altivar 310 - Line chokes and Motor chokes



Line chokes							
For use with			ATV310H037N4E	ATV310H075N4E	ATV310HU15N4E	ATV310HU22N4E	ATV310HU30N4E
Line current with choke	HD	380 V	1.1	1.9	3.5	5.1	6.6
		460 V	1	1.7	2.9	4.4	5.6
	ND	380 V					8.5
		460 V					7.1
Line current without choke	HD	380 V	2.1	3.5	6.5	8.8	11.1
		460 V	1.8	3.1	5.4	7.2	9.2
	ND	380 V					14.2
		460 V					11.6
Dimensions: W x H x D (mm)			100 x 135 x 60		130 x 155 x 90		
Reference			VW3A4551		VW3A4552		

For use with			ATV310HU40N4E	ATV310HU55N4E	ATV310HU75N4E	ATV310HD11N4E	ATV310HD15N4E
Line current with choke	HD	380 V	8.5	11.6	16.1	22	28.9
		460 V	7.7	9.9	14.2	18.3	24.4
	ND	380 V	11.6	15.3	22.2	29.9	29
		460 V	9.9	12.8	18.8	25	29
Line current without choke	HD	380 V	13.7	21.3	26.6	36.1	46.5
		460 V	11.4	14.3	22.4	30.4	38.5
	ND	380 V	18	23	29.5	38.6	46.6
		460 V	14.9	19	24.8	32.5	38.8
Dimensions: W x H x D (mm)			130 x 155 x 90		155 x 170 x 135		
Reference			VW3A4553		VW3A4554		

For use with			ATV310HD18N4E	ATV310HD22N4E	ATV310HD15N4EF	ATV310HD18N4EF	ATV310HD22N4EF
Line current with choke	HD	380 V	36.4	42.4	28.9	36.4	42.4
		460 V	31.6	36.3	24.4	31.6	36.3
	ND	380 V	41.8	57.2	29	41.8	57.2
		460 V	35.3	48.3	29	35.3	48.3
Line current without choke	HD	380 V	55.3	64.2	46.5	55.3	64.2
		460 V	45.8	53.2	38.5	45.8	53.2
	ND	380 V	54.1	71.2	46.6	54.1	71.2
		460 V	45.1	59.2	38.8	45.1	59.2
Dimensions: W x H x D (mm)		HD	180 x 210 x 160	180 x 210 x 160	155 x 170 x 135	180 x 210 x 160	180 x 210 x 160
		ND V		270 x 210 x 180			270 x 210 x 180
Reference		HD	VW3A4555	VW3A4555	VW3A4554	VW3A4555	VW3A4555
		ND V		VW3A4556			VW3A4556


Motor chokes						
For use with		ATV310H037N4E	ATV310H075N4E	ATV310HU15N4E	ATV310HU22N4E	ATV310HU30N4E
HD and ND	HD			HD		HD/ND
Losses (W)	45			65		
Nominal current (A)	4			10		
Dimensions: W x H x D (mm)	100 x 135 x 60			130 x 155 x 90		
Reference	VW3A4551			VW3A4552		

For use with	ATV310HU40N4E		ATV310HU55N4E	ATV310HU75N4E	ATV310HD11N4E
HD and ND	HD	ND	HD/ND	HD/ND	
Losses (W)	65	75	75	90	
Nominal current (A)	10	17	17	31	
Dimensions: W x H x D (mm)	130 x 155 x 90		130 x 155 x 90	130 x 155 x 90	155 x 170 x 135
Reference	VW3A4552	VW3A4553	VW3A4553	VW3A4554	

Motor chokes

For use with	ATV310HD15N4E(F)	ATV310HD18N4E(F)	ATV310HD22N4E(F)	
HD and ND	HD/ND		HD	ND
Losses (W)	94		94	260
Nominal current (A)	60		60	107
Dimensions: W x H x D (mm)	180 x 210 x 160		180 x 210 x 160	270 x 210 x 180
Reference	VW3A4555		VW3A4555	VW3A4556

Easy Altivar 310 - Braking resistors

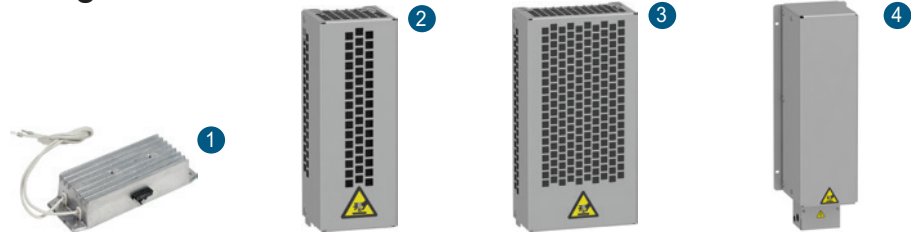

Braking resistors

Not protected resistor (IP00) (1)					
For use with	ATV310HU15N4E	ATV310HU22N4E	ATV310HU30N4E	ATV310HU40N4E	
Minimum Ohmic value (W)	80	60	36	36	
Ohmic value at 20° C (W)	100		100		
Power available at 50° C (kW) (2)	0.028		0.035		
Dimensions: W x H x D (mm)	60 x 170 x 30		62 x 212 x 36		
Reference	VW3A7723 1		VW3A7725 1		
Protected resistor (IP20 or 23)					
For use with	ATV310HU15N4E	ATV310HU22N4E	ATV310HU30N4E	ATV310HU40N4E	
Minimum Ohmic value (W)	80	60	36	36	
Ohmic value at 20° C (W)	100				
Power available at 50° C (kW) (2)	0.1				
Dimensions: W x H x D (mm)	105 x 295 x 100				
Reference	VW3A7730 2				
Protected resistor (IP20 or 23)					
For use with	ATV310HU55N4E	ATV310HU75N4E	ATV310HD11N4E	ATV310HD15N4E	
Minimum Ohmic value (W)	28	28	28	16	
Ohmic value at 20° C (W)	60		28	16	
Power available at 50° C (kW) (2)	0.16		0.3	0.96	
Dimensions: W x H x D (mm)	105 x 345 x 100		175 x 345 x 100	190 x 570 x 180	
Reference	VW3A7731 2		VW3A7732 3	VW3A7733 4	
Protected resistor (IP20 or 23)					
For use with	ATV310HD18N4E	ATV310HD22N4E	ATV310HD15N4EF	ATV310HD18N4EF	ATV310HD22N4EF
Minimum Ohmic value (W)	10	10	16	10	10
Ohmic value at 20° C (W)	16				
Power available at 50° C (kW) (2)	0.96				
Dimensions: W x H x D (mm)	190 x 570 x 180				
Reference	VW3A7733 4				

(1) For not protected resistors, add a thermal overload device

(2) Load factor for resistors: the value of the average power that can be dissipated at 50 °C from the resistor into the casing is determined for a load factor during braking that corresponds to the majority of normal applications.

For VW3A7730...733:

- 2 s braking with a 0.6 T_n braking torque for a 40 s cycle

- 0.8 s braking with a 1.5 T_n braking torque for a 40 s cycle


Easy Altivar 310 - Modbus serial link



Modbus serial link

Connection via splitter box and RJ45 connectors


Description	Modbus splitter box ① 10 RJ45 connectors and 1 screw terminal	Cordsets for Modbus serial link ② equipped with 2 RJ45 connectors		
Length (m)	–	0.3	1	3
Reference	LU9GC3	VW3A8306R03	VW3A8306R10	VW3A8306R30

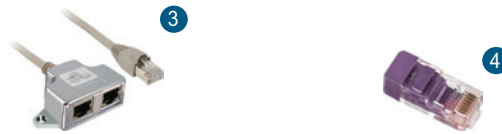

Description	Modbus T-junction boxes ③ (with integrated cable)		Line terminators (1) (2) ④ For RJ45 connector	
Length (m)	0.3	1	–	–
Reference	VW3A8306TF03	VW3A8306TF10	VW3A8306RC	VW3A8306R

(1) Depends on the bus architecture
(2) Order in multiples of 2

Easy Altivar 310 - Motor starters

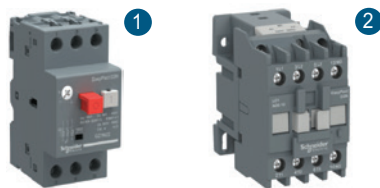

Motor starters - Three-phase supply voltage, 380...460 V 50/60 Hz (2)

Standard power ratings	kW	0.37	0.75	1.5	2.2	3	4
	HP	0.5	1	2	3	4	5.4
Variable speed drive		ATV310H037N4E	ATV310H075N4E	ATV310HU15N4E	ATV310HU22N4E	ATV310HU30N4E	ATV310HU40N4E
Combination with control circuit	TeSys motor circuit-breaker (3)	GZ1LE07	GZ1LE08	GZ1LE14	GZ1LE14	GZ1LE16	GZ1LE20
	Operating range	2.5	4	10	10	14	18
	TeSys contactor (1)	LC1E06●●●●	LC1E06●●●●	LC1E09●●●●	LC1E09●●●●	LC1E18●●●●	LC1E18●●●●

Standard power ratings	kW	5.5	7.5	11	15	18.5	22
	HP	7.4	10	15	20	25	30
Variable speed drive		ATV310HU55N4E	ATV310HU75N4E	ATV310HD11N4E	ATV310HD15N4E(F)	ATV310HD18N4E(F)	ATV310HD22N4E(F)
Combination with control circuit	TeSys motor circuit-breaker (3) (4)	GZ3LE25	GZ3LE32	GZ3LE40	GZ3LE50	GZ3LE65	GZ3LE73
	Operating range	25	32	40	50	60	73
	TeSys contactor (1)	LC1E25●●●●	LC1E32●●●●	LC1E40●●	LC1E50●●	LC1E65●●	LC1E80●●

(1) For a complete list of references for TeSys contactors, please visit our local website.
 (2) Motor power indicated for combination with an ATV310H●●●N4E drive with the same rating.
 (3) TeSys motor circuit-breakers:
 - GZ1N●●: Thermal magnetic motor circuit-breakers with pushbutton control
 - CVS●●: Molded-case circuit breakers with adjustable setting.
 (4) Not released yet, will be available soon.



04. Easy Harmony Electromechanical Relays

Easy Harmony RXM electromechanical relays



Easy Harmony RXM miniature plug-in relays

Type		With LED - Miniature relays without lockable test-button	
Contact		2 CO	4 CO
Enclosed Thermal Current (Ithe)		5 A	3 A
Complete product	12 VDC	RXM2LB2JD	RXM4LB2JD
	24 VDC	RXM2LB2BD	RXM4LB2BD
	36 VDC	-	RXM4LB2CD
	48 VDC	RXM2LB2ED	RXM4LB2ED
	110 VDC	RXM2LB2FD	RXM4LB2FD
	24 VAC	RXM2LB2B7	RXM4LB2B7
	120 VAC	RXM2LB2F7	RXM4LB2F7
	230 VAC	RXM2LB2P7	RXM4LB2P7

Type		Without LED - Miniature relays without lockable test-button	
Contact		2 CO	4 CO
Enclosed Thermal Current (Ithe)		5 A	3 A
Complete product	12 VDC	RXM2LB1JD	RXM4LB1JD
	24 VDC	RXM2LB1BD	RXM4LB1BD
	24 VAC	RXM2LB1B7	RXM4LB1B7
	120 VAC	RXM2LB1F7	RXM4LB1F7
	230 VAC	RXM2LB1P7	RXM4LB1P7

4



For use with	RXM2	RXM2, RXM4
Screw clamp socket	RXZE1M2C	RXZE1M4C



For use with	RXZE1M●C	RXZE1M2C
Metal maintaining clamp	RXZ410	RXZ420

Note: if protection module is needed, please use RXZE● sockets with the associated protection module RXM0. You can find more details in Harmony Electromechanical Relays catalog - RXM●AB range section.



05. Easy Modicon power supplies

Easy Modicon ABL2K power supplies and Accessories



ABL2 regulated switch mode 24 V DC power supplies 1

Cooling design	Natural convection			
Automatic protect reset				
Voltage switching	Automatic			
Input Voltage single-phase (47~63Hz)	100...240 VAC			
Output Voltage	24 V DC			
Power (W)	35		50	
Output current (A)	1.5		2.2	
Overload hiccup protection (%)	110-160		170-190	
Reference	ABL2REM24015K	ABL2REM24020K	ABL2REM24015KQ	ABL2REM24020KQ

Cooling design	Natural convection			
Automatic protect reset				
Voltage switching	Automatic		Manual	
Input Voltage single-phase (47~63Hz)	100...240 VAC		100...120 VAC, 200...240 VAC	
Output Voltage	24 V DC			
Power (W)	100		150	
Output current (A)	4.5		6.5	
Overload hiccup protection (%)	110-160		170-190	
Reference	ABL2REM24045K	ABL2REM24065K	ABL2REM24045KQ	ABL2REM24065KQ

Cooling design	Natural convection		Forced air cooling by built-in DC fan	
Automatic protect reset				
Voltage switching	Manual			
Input Voltage single-phase (47~63Hz)	100...120 VAC, 200...240 VAC			
Output Voltage	24 V DC			
Power (W)	200	250	350	
Output current (A)	8.3	10.5	14.6	
Overload hiccup protection (%)	110-150			
Reference	ABL2REM24085K	ABL2REM24100K	ABL2REM24150K	



Options for ABL2 power supplies

Type of mounting accessory	4-corner bracket 2	Clip-on mounting plate 3	L-type accessories 4	
Description	For direct mounting on back panel. Mounting screws not provided. Recommended use: M4 (6 mm/0.24 in) or M4 (8 mm/0.31 in) screws	For mounting on 35 mm (1.37 in.) DIN rail	Size: Small L	Size: Big L
For power supplies	ABL2REM24085K, ABL2REM24100K, ABL2REM24150K	All models	ABL2REM24015K, ABL2REM24015KQ, ABL2REM24020K, ABL2REM24020KQ, ABL2REM24045K, ABL2REM24045KQ, ABL2REM24065K, ABL2REM24065KQ	ABL2REM24085K, ABL2REM24100K, ABL2REM24150K
Sold in lots of	40	5 (1)	1	1
Reference	ABL2K01	ABL2K02	ABL2K03A	ABL2K03B

(1) ABL2K02 is a pack of 5 accessories usable on 35 mm (1.37 in.) L-rails. Please note that only 1 accessory is necessary for mounting a 35 to 150 W model but 2 accessories are needed for the other three models (200, 250, and 350 W).





06. Easy Lexium Motion Control

Easy Lexium 16D Motion control



Lexium 16D servo drives and BCH16 servo motors combinations - Single-phase supply voltage: 200/230 VAC

Power output (kW)	0.1		0.2		
Dimensions: W x H x D (mm)	52 x 150 x 155.2		52 x 150 x 155.2		
Nominal speed of rotation (min-1)	3000		3000		
Nominal torque (N.m)	0.32		0.64		
With holding brake	No	Yes	No	Yes	
Inertia -without holding brake (kg.cm ²)	0.041	0.047	0.42	0.48	
Motor inertia type	Low		High		
Reference	Servo drive reference ①	LXM16DU01M2X LXM16MU01M2X		LXM16DU02M2X LXM16MU02M2X	
	Servo motor reference ②	BCH16LB01330A5C2 BCH16LB01332A5C2	BCH16LB01330F5C2 BCH16LB01332F5C2	BCH16HD02330A5C2 BCH16HD02332A5C2	BCH16HD02330F5C2 BCH16HD02332F5C2

Power output (kW)	0.4		0.75		
Dimensions: W x H x D (mm)	52 x 150 x 155.2		65 x 150 x 185.2		
Nominal speed of rotation (min-1)	3000		3000		
Nominal torque (N.m)	1.27		2.39		
With holding brake	No	Yes	No	Yes	
Inertia -without holding brake (kg.cm ²)	0.67	0.73	1.51	1.64	
Motor inertia type	Low		High		
Reference	Servo drive reference ①	LXM16DU04M2X LXM16MU04M2X		LXM16DU07M2X LXM16MU07M2X	
	Servo motor reference ②	BCH16HD04330A5C2 BCH16HD04332A5C2	BCH16HD04330F5C2 BCH16HD04332F5C2	BCH16HF07330A5C2 BCH16HF07332A5C2	BCH16HF07330F5C2 BCH16HF07332F5C2

Power output (kW)	1		1		
Dimensions: W x H x D (mm)	65 x 150 x 185.2		65 x 150 x 185.2		
Nominal speed of rotation (min-1)	3000		3000		
Nominal torque (N.m)	3.18		3.18		
With holding brake	No	Yes	No	Yes	
Inertia -without holding brake (kg.cm ²)	1.24	1.37	2.65	2.75	
Motor inertia type	Low		Low		
Reference	Servo drive reference ①	LXM16DU10M2X LXM16MU10M2X		LXM16DU10M2X LXM16MU10M2X	
	Servo motor reference ②	BCH16LF10330A5C2 BCH16LF10332A5C2	BCH16LF10330F5C2 BCH16LF10332F5C2	BCH16LH10330A6C2 BCH16LH10332A6C2	BCH16LH10330F6C2 BCH16LH10332F6C2

Power output (kW)	1				
Dimensions: W x H x D (mm)	65 x 150 x 185.2				
Nominal speed of rotation (min-1)	2000				
Nominal torque (N.m)	3.18				
With holding brake	No		Yes		
Inertia -without holding brake (kg.cm ²)	10.88		11.58		
Motor inertia type	High				
Reference	Servo drive reference ①	LXM16DU10M2X LXM16MU10M2X			
	Servo motor reference ②	BCH16HM10230A6C2 BCH16HM10232A6C2		BCH16HM10230F6C2 BCH16HM10232F6C2	

Power output (kW)	0.85		1.5		
Dimensions: W x H x D (mm)	65 x 150 x 185.2		65 x 150 x 185.2		
Nominal speed of rotation (min-1)	1500		2000		
Nominal torque (N.m)	5.39		7.16		
With holding brake	No	Yes	No	Yes	
Inertia -without holding brake (kg.cm ²)	14.08	14.78	14.8	15.5	
Motor inertia type	High		High		
Reference	Servo drive reference ①	LXM16DU15M2X LXM16MU15M2X		LXM16DU15M2X LXM16MU15M2X	
	Servo motor reference ②	BCH16HM08130A6C2 BCH16HM08132A6C2	BCH16HM08130F6C2 BCH16HM08132F6C2	BCH16HM15230A6C2 BCH16HM15232A6C2	BCH16HM15230F6C2 BCH16HM15232F6C2



Easy Lexium 16D Motion control - Connection accessories



Connectors			
Designation	SCSI-26 connector for creating control cordsets (CN1) 1	Connector for connection of power supply, external braking resistor and motor power output (CNP) 2	10-pin connector for creating encoder cordsets (CN2) For cable crossection: 2*0.5 mm ² + 3 x 2 x 0.2 mm ² 3
Description	1 x SCSI-26 connector 1 x shielded chassis 1 x connector housing 2 x screw for fix to connection port 2 x screw for connector housing	1 x connector	1 x IEEE1394 10-pin connector 1 x shielded chassis 1 x connector housing 2 x spring clamp for fix to connection port
For use with	LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16DU07M2X, LXM16DU10M2X, LXM16DU15M2X LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X, LXM16MU07M2X, LXM16MU10M2X, LXM16MU15M2X		
Reference	VW3M4A11	VW3M4A21	VW3M4A31



Control cordsets and Power cordset kit			
Designation	Pre-assembled control cordsets dedicated to 24VDC pulse train with interface module (CN1)	Pre-assembled control cordsets dedicated to 3.3 VDC pulse train with interface module (CN1)	Power cordset shield connection plate
Description	1 x pre-assembled control cordsets (Length: 1 m/3.28 ft.) 1 x interface module	1 x pre-assembled control cordsets (Length: 1 m/3.28 ft.) 1 x interface module	1 x grounding chassis 1 x spring clamp connector
For use with	LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16DU07M2X, LXM16DU10M2X, LXM16DU15M2X LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X, LXM16MU07M2X, LXM16MU10M2X, LXM16MU15M2X		
Reference	VW3M4A12	VW3M4A15	VW3M2A31



Programming cables	
Designation	Programming cables
Description	Transferring a configuration from a PC to the Lexium 16D servo drive via the CN3 interface (USB mini-B) on Lexium 16D servo drives
Length (m)	3 1.8
Reference	TCSXCNAMUM3P (1) BMXXCAUSBH018

(1) Unshielded, non-grounded cable. Only for use on temporary connections. For permanent connections, use cable reference BMXXCAUSBH018.

Modbus TCP network cordsets									
Designation	Straight shielded twisted pair cordsets (conforming to EIA/TIA-568, category 5 and IEC1180/EN50173, class D standards)			Crossed shielded twisted pair cordsets		Straight shielded twisted pair cordsets (conforming to UL and CSA 22.1 standards)			Crossed shielded twisted pair cordsets
Description	2 RJ45 connectors								
Length (m)	2	5	12	5	15	2	5	15	5
Reference	490NT-W00002	490NT-W00005	490NT-W00012	490NT-C00005	490NT-C00015	490NT-W00002U	490NT-W00005U	490NT-W00012U	490NT-C00005U

Easy Lexium 16D Motion control - External braking resistor



External braking resistors					
For use with Servo drives		LXM16DU07M2X, LXM16DU10M2X, LXM16DU15M2X LXM16MU07M2X, LXM16MU10M2X, LXM16MU15M2X			
Ohmic value (W)		27			
Continuous power (PPr)		100	200	400	
Peak energy (EPk)	115 V (Ws)	4,200	9,700	25,500	
	230 V (Ws)	3,800	7,400	18,100	
	400 V (Ws)	1,900	4,900	11,400	
	480 V (Ws)	1,900	4,300	10,500	
Reference	Connection cable (m)	0.75	VW3A7602R07	VW3A7603R07	VW3A7604R07
		2	VW3A7602R20	VW3A7603R20	VW3A7604R20
		3	–	VW3A7603R30	VW3A7604R30

For use with Servo drives		LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16DU07M2X, LXM16DU10M2X, LXM16DU15M2X LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X, LXM16MU07M2X, LXM16MU10M2X, LXM16MU15M2X				
Ohmic value (W)		72		100		
Continuous power (PPr)		100	200	400	100	
Peak energy (EPk)	115 V (Ws)	5,500	14,600	36,600	4,400	
	230 V (Ws)	3,700	9,600	24,700	4,400	
	400 V (Ws)	2,500	6,600	16,200	2,900	
	480 V (Ws)	2,300	6,000	15,500	2,900	
Reference	Connection cable (m)	0.75	VW3A7605R07	VW3A7606R07	VW3A7607R07	VW3A7608R07
		2	VW3A7605R20	VW3A7606R20	VW3A7607R20	VW3A7608R20
		3	VW3A7605R30	VW3A7606R30	VW3A7607R30	VW3A7608R30

Note: The total continuous power dissipated in the external braking resistor(s) must be less than or equal to the nominal power of the Lexium 16 servo drive.

Easy Lexium 16D Motion control - Additional EMC input filters



Additional EMC filters		
For servo drive	LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X	LXM16DU07M2X, LXM16DU10M2X, LXM16DU15M2X, LXM16MU07M2X, LXM16MU10M2X, LXM16MU15M2X
Maximum servo motor shielded cable length (1)	25	25
Reference	VW3A4420	VW3A4421

(1) Conforming to EN 55011 class A Gr2, IEC/EN 61800-3 category C3 in environment 2. Switching frequency 8 kHz.

Easy Lexium 16D Motion control - Motor starters, Protection using class J fuses



Motor starters - Combinations				
Servo drive	Nominal power (kW)	0.1	0.2	0.4
	Main number of phase	1	1	1
	Reference	① LXM16DU01M2X LXM16MU01M2X	LXM16DU02M2X LXM16MU02M2X	LXM16DU04M2X LXM16MU04M2X
Circuit-breaker	Rating (A)	10	10	10
	Reference	② GV2P14		
Contactor	Reference (1) (2)	③ LC1K0610●●		LC1K09●●

Servo drive	Nominal power (kW)	0.75	1	1.5
	Main number of phase	1	1	1
	Reference	① LXM16DU07M2X LXM16MU07M2X	LXM16DU10M2X LXM16MU10M2X	LXM16DU15M2X LXM16MU15M2X
Circuit-breaker	Rating (A)	10	10	14
	Reference	② GV2P14	GV2P14	GV2P16
Contactor	Reference (1) (2)	③ LC1K09●●	LC1K12●●	LC1D18●●

(1) Composition of the contactors:

LC1K0610●●: 3 poles + 1 N/O auxiliary contact

LC1K09●●, LC1K12●●: 4 poles

LC1D18●●: 3 poles + 1 N/O auxiliary contact + 1 N/C auxiliary contact

Please refer to CONTACTORS AND PROTECTION RELAYS page on our web site

(2) Replace ●● with the control circuit voltage code given in the table below:

LC1K	Volts ~	220 Volts ~	230 Volts ~	240 Volts ~
	50/60 Hz	M7	P7	U7
LC1D	Volts ~	220/230 Volts ~	230 Volts ~	230/240 Volts ~
	50 Hz	M5	P5	U5
	60 Hz	M6	–	U6
	50/60 Hz	M7	P7	U7


For other available voltages between 24 V and 660 V, or a DC control circuit, please contact our Customer Care Center

Protection using class J fuses (UL certification)

Mains supply voltage: 200...230 V a 50/60Hz

Fuse to be placed upstream (A)	5	5	20	20	25	40	
Servo drive	Nominal power (kW)	0.1	0.2	0.4	0.75	1	1.5
	Reference	LXM16DU01M2X LXM16MU01M2X	LXM16DU02M2X LXM16MU02M2X	LXM16DU04M2X LXM16MU04M2X	LXM16DU07M2X LXM16MU07M2X	LXM16DU10M2X LXM16MU10M2X	LXM16DU15M2X LXM16MU15M2X

Easy Lexium 16D Motion control - BCH16 servo motors

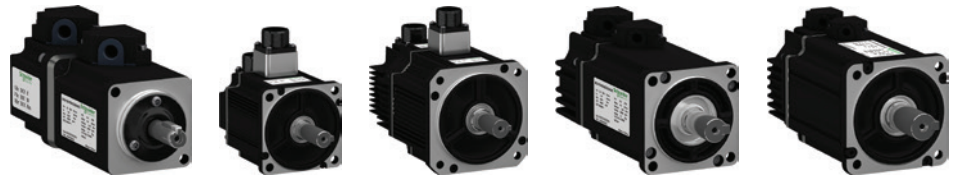

BCH16 servo motors		B	C	H	16	•	•	••	•	•	•	•	•	C	2
Brushless servo motor															
Inertia	Low inertia					L									
	High inertia					H									
Flange size (mm)	40						B								
	60						D								
	80						F								
	100						H								
	130						M								
Rated output (W)	100							01							
	200							02							
	400							04							
	750							07							
	850							08							
	1 kW							10							
	1.5 kW							15							
Power supply ~ 220 V Winding type (rpm)	1000/1500								1						
	2000									2					
	3000										3				
Shaft end	Keyed shaft (shaft & housing IP 65)									3					
Encoder	2500 ppr incremental encoder											0			
	23 bit high resolution												2		
Holding brake	Without brake												A		
	With brake (option)													F	
Connections	Free leads with connectors (BCH16•B, BCH16•D, BCH16•F motors only)													5	
	MIL connectors (BCH16•H, BCH16•M, BCH16•R motors only)														6
Mechanical motor design	Motor compatible with Asian style mounting standards													C	
Hardware Version	RS02														2

Easy Lexium 16D Motion control - Connection components



Power cordsets - Shielded and Unshielded

Designation	1	Equipped with one plastic connector (servo motor side), and a free lead (servo drive side)						
For use	From servo drive	LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16DU07M2X LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X, LXM16MU07M2X						
	To servo motor	BCH16LB01330●5C2, BCH16HD02330●5C2, BCH16HD04330●5C2, BCH16HF07330●5C2, BCH16LF10330●5C2 BCH16LB01332●5C2, BCH16HD02332●5C2, BCH16HD04332●5C2, BCH16HF07332●5C2, BCH16LF10332●5C2						
For cable cross-section(mm²)		4G0.75						
Length (m)		1.5	3	5	10	15	20	25
Reference	Unshielded power cordsets	VW3M5A11RA5	VW3M5A11R03	VW3M5A11R05	VW3M5A11R10	VW3M5A11R15	VW3M5A11R20	VW3M5A11R25
	Shielded power cordsets	VW3M5A11RA5S	VW3M5A11R03S	VW3M5A11R05S	VW3M5A11R10S	VW3M5A11R15S	VW3M5A11R20S	VW3M5A11R25S

Designation	2	Equipped with one MIL connector (servo motor side), and a free lead (servo drive side)						
For use	From servo drive	LXM16DU10M2X, LXM16DU15M2X LXM16MU10M2X, LXM16MU15M2X						
	To servo motor	BCH16HM08130A6C2, BCH16LH10330A6C2, BCH16HM10230A6C2, BCH16HM15230A6C2 BCH16HM08132A6C2, BCH16LH10332A6C2, BCH16HM10232A6C2, BCH16HM15232A6C2						
For cable cross-section(mm²)		4G2						
Length (m)		1.5	3	5	10	15	20	25
Reference	Unshielded power cordsets	VW3M5A21RA5	VW3M5A21R03	VW3M5A21R05	VW3M5A21R10	VW3M5A21R15	VW3M5A21R20	VW3M5A21R25
	Shielded power cordsets	VW3M5A21RA5S	VW3M5A21R03S	VW3M5A21R05S	VW3M5A21R10S	VW3M5A21R15S	VW3M5A21R20S	VW3M5A21R25S

Designation	3	Equipped with one MIL connector (servo motor side), and a free lead (servo drive side) Integrating brake control						
For use	From servo drive	LXM16DU10M2X, LXM16DU15M2X LXM16MU10M2X, LXM16MU15M2X						
	To servo motor	BCH16HM08130F6C2, BCH16LH10330F6C2, BCH16HM10230F6C2, BCH16HM15230F6C2 BCH16HM08132F6C2, BCH16LH10332F6C2, BCH16HM10232F6C2, BCH16HM15232F6C2						
For cable cross-section(mm²)		6G2						
Length (m)		1.5	3	5	10	15	20	25
Reference	Unshielded power cordsets	VW3M5A22RA5	VW3M5A22R03	VW3M5A22R05	VW3M5A22R10	VW3M5A22R15	VW3M5A22R20	VW3M5A22R25
	Shielded power cordsets	VW3M5A22RA5S	VW3M5A22R03S	VW3M5A22R05S	VW3M5A22R10S	VW3M5A22R15S	VW3M5A22R20S	VW3M5A22R25S

Motor power connectors

Designation	Plastic connector 1	MIL connector 2
Use for	for creating power cordsets	
For use with	BCH16LB01330●5C2, BCH16HD02330●5C2, BCH16HD04330●5C2, BCH16HF07330●5C2, BCH16LF10330●5C2	BCH16HM08130A6C2, BCH16LH10330A6C2, BCH16HM10230A6C2, BCH16HM15230A6C2
	BCH16LB01332●5C2, BCH16HD02332●5C2, BCH16HD04332●5C2, BCH16HF07332●5C2, BCH16LF10330●5C2	BCH16HM08132A6C2, BCH16LH10332A6C2, BCH16HM10232A6C2, BCH16HM15232A6C2
For cable cross-section(mm²)	4G0.75	4G2.0
Reference	VW3M5A11	VW3M5A21

Easy Lexium 16D Motion control - Connection components



Unshielded brake control cordsets							
Designation	Equipped with one plastic connector (servo motor side), and a free lead (servo drive side) ①						
For use	From servo drive	LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16DU07M2X LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X, LXM16MU07M2X					
	To servo motor	BCH16LB01330F5C2, BCH16HD02330F5C2, BCH16HD04330F5C2, BCH16HF07330F5C2, BCH16LF10330F5C2 BCH16LB01332F5C2, BCH16HD02332F5C2, BCH16HD04332F5C2, BCH16HF07332F5C2, BCH16LF10332F5C2					
For cable cross-section(mm²)	2 x 0.5						
Length (m)	1.5	3	5	10	15	20	25
Reference	VW3M5A12RA5	VW3M5A12R03	VW3M5A12R05	VW3M5A12R10	VW3M5A12R15	VW3M5A12R20	VW3M5A12R25

Brake connectors		
Designation	Plastic connector ①	Mil connector ③
Use for	for creating brake control cordsets	for creating power & brake control cordsets
For use with	BCH16LB01330F5C2, BCH16HD02330F5C2, BCH16HD04330F5C2, BCH16HF07330F5C2, BCH16LF10330F5C2	BCH16HM08130F6C2, BCH16LH10330F6C2, BCH16HM10230F6C2, BCH16HM15230F6C2
	BCH16LB01332F5C2, BCH16HD02332F5C2, BCH16HD04332F5C2, BCH16HF07332F5C2, BCH16LF10332F5C2	BCH16HM08132F6C2, BCH16LH10332F6C2, BCH16HM10232F6C2, BCH16HM15232F6C2
For cable cross-section(mm²)	2 x 0.5	6G2.0
Reference	VW3M5A12	VW3M5A22

Shielded encoder cordsets							
Designation	Equipped with one plastic connector (servo motor side), and VW3M4A31 connector (servo drive side) ②						
For use	From servo drive	LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16DU07M2X LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X, LXM16MU07M2X					
	To servo motor	BCH16LB01330●5C2, BCH16HD02330●5C2, BCH16HD04330●5C2, BCH16HF07330●5C2, BCH16LF10330●5C2					
For cable cross-section(mm²)	2 x 0.5 + 3 x 2 x 0.2						
Length (m)	1.5	3	5	10	15	20	25
Reference	VW3M8A11RA5	VW3M8A11R03	VW3M8A11R05	VW3M8A11R10	VW3M8A11R15	VW3M8A11R20	VW3M8A11R25

Designation	Equipped with one plastic connector (servo motor side), and VW3M4A31 connector (servo drive side) ②						
For use	From servo drive	LXM16DU01M2X, LXM16DU02M2X, LXM16DU04M2X, LXM16DU07M2X LXM16MU01M2X, LXM16MU02M2X, LXM16MU04M2X, LXM16MU07M2X					
	To servo motor	BCH16LB01332●5C2, BCH16HD02332●5C2, BCH16HD04332●5C2, BCH16HF07332●5C2, BCH16LF10332●5C2					
For cable cross-section(mm²)	2 x 0.5 + 1 x 2 x 0.2						
Length (m)	1.5	3	5	10	15	20	25
Reference	VW3M8A12RA5	VW3M8A12R03	VW3M8A12R05	VW3M8A12R10	VW3M8A12R15	VW3M8A12R20	VW3M8A12R25

Designation	Equipped with one MIL connector (servo motor side), and VW3M4A31 connector (servo drive side) ③						
For use	From servo drive	LXM16DU10M2X, LXM16DU15M2X LXM16MU10M2X, LXM16MU15M2X					
	To servo motor	BCH16HM08130●6C2, BCH16LH10330●6C2, BCH16HM10230●6C2, BCH16HM15230●6C2					
For cable cross-section(mm²)	2 x 0.5 + 3 x 2 x 0.2						
Length (m)	1.5	3	5	10	15	20	25
Reference	VW3M8A21RA5	VW3M8A21R03	VW3M8A21R05	VW3M8A21R10	VW3M8A21R15	VW3M8A21R20	VW3M8A21R25

Designation	Equipped with one MIL connector (servo motor side), and VW3M4A31 connector (servo drive side) ③						
For use	From servo drive	LXM16DU10M2X, LXM16DU15M2X LXM16MU10M2X, LXM16MU15M2X					
	To servo motor	BCH16HM08132●6C2, BCH16LH10332●6C2, BCH16HM10232●6C2, BCH16HM15232●6C2					
For cable cross-section(mm²)	2 x 0.5 + 1 x 2 x 0.2						
Length (m)	1.5	3	5	10	15	20	25
Reference	VW3M8A22RA5	VW3M8A22R03	VW3M8A22R05	VW3M8A22R10	VW3M8A22R15	VW3M8A22R20	VW3M8A22R25



Easy Lexium 16D Motion control - Connection components



Motor encoder connectors		
Designation	Plastic connector 4	Mil connector 3
Use for	for creating encoder cordsets	
For use with	BCH16LB01330●5C2, BCH16HD02330●5C2, BCH16HD04330●5C2, BCH16HF07330●5C2, BCH16LF10330●5C2 BCH16LB01332●5C2, BCH16HD02332●5C2, BCH16HD04332●5C2, BCH16HF07332●5C2, BCH16LF10332●5C2	BCH16HM08130●6C2, BCH16LH10330●6C2, BCH16HM10230●6C2, BCH16HM15230●6C2 BCH16HM08132●6C2, BCH16LH10332●6C2, BCH16HM10232●6C2, BCH16HM15232●6C2
For cable cross-section(mm²)	2 x 0.5 + 3 x 2 x 0.2 2 x 0.5 + 1 x 2 x 0.2	
Reference	VW3M8A11	VW3M8A21

Easy Lexium 26 servo drive and BCH2 servo motor combinations



Easy Lexium 26 servo drive and BCH2 servo motor: single-phase and 3-phase supply voltage: 200/240 VAC

Power output (kW)	0.05	0.1	0.2	0.3	
Nominal speed of rotation (min-1)	3000	3,000	3,000	1,000	
Nominal torque (N.m)	0.16	0.32	0.64	2.86	
Max peak torque (N.m)	0.48	0.96	1.92	8.59	
Inertia -without holding brake (kg.cm²)	0.054	0.075	0.16	6.63	
Motor inertia type	Medium	Medium	Low	Medium	
Dimensions: W x H x D (mm)	55 x 150 x 146				
Reference	Servo drive reference	LXM26DUA5M3X	LXM26DU01M3X	LXM26DU02M3X	LXM26DU04M3X
	Servo motor reference	With holding brake BCH2MBA533●F5C	With holding brake BCH2MB0133●F5C	With holding brake BCH2LD0233●F5C	With holding brake BCH2MM0313●F6C
	Without holding brake	BCH2MBA533●A5C	BCH2MB0133●A5C	BCH2LD0233●A5C	BCH2MM0313●A6C

Power output (kW)	0.4	0.4	0.5	0.6	
Nominal speed of rotation (min-1)	3,000	3,000	2,000	1,000	
Nominal torque (N.m)	1.27	1.27	2.39	5.73	
Max peak torque (N.m)	3.81	3.81	7.16	17.19	
Inertia -without holding brake (kg.cm²)	0.27	0.67	6.63	6.63	
Motor inertia type	Low	Low	Medium	Medium	
Dimensions: W x H x D (mm)	55 x 150 x 146				
Reference	Servo drive reference	LXM26DU04M3X	LXM26DU04M3X	LXM26DU07M3X	LXM26DU07M3X
	Servo motor reference	With holding brake BCH2LD0433●F5C	With holding brake BCH2LF0433●F5C	With holding brake BCH2MM0523●F6C	With holding brake BCH2MM0613●F6C
	Without holding brake	BCH2LD0433●A5C	BCH2LF0433●A5C	BCH2MM0523●A6C	BCH2MM0613●A6C

Power output (kW)	0.75	0.75	0.85	0.9	
Nominal speed of rotation (min-1)	3,000	3,000	1,500	1,000	
Nominal torque (N.m)	2.39	2.39	5.39	8.59	
Max peak torque (N.m)	7.16	7.16	13.8	25.77	
Inertia -without holding brake (kg.cm²)	1.19	1.54	13.5	9.7	
Motor inertia type	Low	High	Medium	Medium	
Dimensions: W x H x D (mm)	55 x 150 x 146		55 x 150 x 177		
Reference	Servo drive reference	LXM26DU07M3X	LXM26DU07M3X	LXM26DU10M3X	LXM26DU10M3X
	Servo motor reference	With holding brake BCH2LF0733●F5C	With holding brake BCH2HF0733●F5C	With holding brake BCH2MM0813●F6C	With holding brake BCH2MM0913●F6C
	Without holding brake	BCH2LF0733●A5C	BCH2HF0733●A5C	BCH2MM0813●A6C	BCH2MM0913●A6C

Power output (kW)	1	1	1.5	
Nominal speed of rotation (min-1)	3,000	2,000	2,000	
Nominal torque (N.m)	3.18	4.77	7.16	
Max peak torque (N.m)	9.54	14.3	21.48	
Inertia -without holding brake (kg.cm²)	2.4	8.41	9.7	
Motor inertia type	Low	High	Medium	
Dimensions: W x H x D (mm)	55 x 150 x 177			
Reference	Servo drive reference	LXM26DU10M3X	LXM26DU10M3X	LXM26DU15M3X
	Servo motor reference	With holding brake BCH2LH1033●F6C	With holding brake BCH2HM1023●F6C	With holding brake BCH2MM1523●F6C
	Without holding brake	BCH2LH1033●A6C	BCH2HM1023●A6C	BCH2MM1523●A6C

Easy Lexium 26 servo drive and BCH2 servo motor combinations



Easy Lexium 26 servo drive and BCH2 servo motor: 3-phase supply voltage: 200/240 VAC

Power output (kW)	2.0	2.0	2.0	3.0		
Nominal speed of rotation (min-1)	3,000	2,000	2,000	1,500		
Nominal torque (N.m)	6.37	9.55	9.55	14.32		
Max peak torque (N.m)	19.11	28.65	28.65	42.97		
Inertia -without holding brake (kg.cm²)	4.26	13.5	34.68	53.56		
Motor inertia type	Low	Medium	High	Medium		
Dimensions: W x H x D (mm)	62 x 170 x 191.6			117.4 x 234 x 193		
Reference	Servo drive reference		LXM26DU20M3X	LXM26DU20M3X	LXM26DU20M3X	LXM26DU30M3X
	Servo motor reference	With holding brake	BCH2LH2033*F6C	BCH2MM2023*F6C	BCH2HR2023*F6C	BCH2MR3023*F6C
		Without holding brake	BCH2LH2033*A6C	BCH2MM2023*A6C	BCH2HR2023*A6C	BCH2MR3023*A6C

Power output (kW)	3.0	3.5	4.5		
Nominal speed of rotation (min-1)	2,000	2,000	1,500		
Nominal torque (N.m)	19.1	16.7	26.65		
Max peak torque (N.m)	57.29	50.3	71.62		
Inertia -without holding brake (kg.cm²)	53.56	53.56	73.32		
Motor inertia type	Medium	Medium	Medium		
Dimensions: W x H x D (mm)	117.4 x 234 x 193				
Reference	Servo drive reference		LXM26DU30M3X	LXM26DU45M3X	LXM26DU45M3X
	Servo motor reference	With holding brake	BCH2MR3013*F6C	BCH2MR3523*F6C	BCH2MR4513*F6C
		Without holding brake	BCH2MR3013*A6C	BCH2MR3523*A6C	BCH2MR4513*A6C

Easy Lexium 26 servo drive - Configuration tools



6

SoMove setup software

Description	USB/RJ45 cordset 1 Used to connect a PC to the device (Lexium Easy 26): this cable is 2.5 m/8.20 ft long and has a USB connector (PC end) and an RJ45 connector (device end)
Reference	TCSMCNAM3M002P

Multi-Loader configuration tool

Description	Multi-Loader configuration tool 2 Supplied with: <ul style="list-style-type: none"> ■ 1 cordset equipped with 2 RJ45 connectors ■ 1 cordset equipped with one type A USB connector and one mini B USB connector ■ 1 x 2 GB SD memory card ■ 1 x female/female RJ 45 adapter ■ 4 AA 1.5 V LFR6 round batteries 	Cordset for Multi-Loader tool 3 For connecting the Multi-Loader tool to the Lexium Easy 26 servo drive in its packaging. Equipped with: <ul style="list-style-type: none"> ■ A non-locking RJ45 connector with special mechanical catch on the drive end and ■ An RJ45 connector on the Multi-Loader end
Reference	VW3A8121	VW3A8126

Easy Lexium 26 servo drive - Accessories



Connection accessories			
Designation	I/O connector (sold in lots of 3)	I/O terminal block module	
For use with	Lexium Easy 26	Lexium Easy 26	
Description	④ Sub-D 50-pin connector for CN1 I/O interface	⑤ Terminal block + Cordset (consisting of 2 Sub-D 50-pin connectors type VW3M1C12 and 0.5 m cable) for CN1 I/O interface connection	
Reference	VW3M1C12	VW3M1C13	
Description	I/O connection cordsets Equipped with one SUB-D 50-pin connector for connection to the CN1 interface (drive end), and open end (controller end)		
Use	This cable is dedicated to Schneider Electric PLCs, type Modicon M218/M221/M241/M200, for controlling Lexium Easy 26 servo drives with pulse-train-output (PTO) and pulse-train-input (PTI) signals.		
Length (m)	1	2	3
Reference	VW3M1C10R10	VW3M1C10R20	VW3M1C10R30



Accessories	
Description	Application name plate (sold in lots of 50)
Use	This contains information about the servo drive. To be inserted in a dedicated slot on top of the servo drive
Dimensions W x H (mm)	38.5 x 13
Reference	VW3M2501

Easy Lexium 26 servo drive - Braking resistors



External braking resistor						
Ohmic value (W)	10		27			
Continuous power	400		100	200	400	
Peak energy 230V (Ws)	13,300		3,800	7,400	18,100	
Reference	Length of connection cable (m)	0.75	VW3A7601R07	VW3A7602R07	VW3A7603R07	VW3A7604R07
		2	VW3A7601R20	VW3A7602R20	VW3A7603R20	VW3A7604R20
		3	VW3A7601R30	VW3A7602R30	VW3A7603R30	VW3A7604R30
Ohmic value (W)	72		10		16	
Continuous power	200		400	956	956	
Peak energy 230V (Ws)	9,600		24,700	–	–	
Reference	Length of connection cable (m)	0.75	VW3A7606R07	VW3A7607R07	VW3A7734	VW3A7733
		2	VW3A7606R20	VW3A7607R20	–	–
		3	VW3A7606R30	VW3A7607R30	–	–

Note: The total continuous power dissipated in the external braking resistor(s) must be less than or equal to the nominal power of the Easy Lexium 26 servo drive.

Easy Lexium 26 servo drive - Additional EMC input filters



Additional EMC input filters

Single-phase supply voltage

For servo drives (max. nominal power) Combination	50 W to 750 W servo drives 1 x EMC filter and a single Lexium Easy 26 servo drive	1 kW and 1.5 kW servo drives 1 x EMC filter and a single Lexium Easy 26 servo drive	7.5 kW max servo drives 1 x common EMC filter and several Lexium Easy 26 servo drives
Line current (A)	9	16	24
Reference	VW3A4420	VW3A4421	VW3A4426

Three-phase supply voltage

For servo drives (max. nominal power) Combination	50 W to 1.5 kW, 2kW and 3kW servo drives 1 x EMC filter and a single Lexium Easy 26 servo drive	4.5 kW servo drives 1 x EMC filter and a single Lexium Easy 26 servo drive	Up to 10 kW servo drives 1 x common EMC filter and several Lexium Easy 26 servo drives
Line current (A)	15	25	47
Reference	VW3A4422	VW3A4423	VW3A4424

Easy Lexium 26 servo drive - Protection using fuses



Combinations - circuit-breakers for single drive installation according to IEC 60364-5-52

Servo drive	Nominal power (kW)	0.05	0.1	0.2	0.4	0.75
	Main number of phase	1 or 3				
	Reference	① LXM26DUA5M3X	LXM26DU01M3X	LXM26DU02M3X	LXM26DU04M3X	LXM26DU07M3X
Circuit-breaker	Rating (A)	10				
	Reference	② GV2P14				
Contactor	Reference (1) (2)	③ LC1K0610●●			LC1K09●●	
Servo drive	Nominal power (kW)	1	1	2	3	4
	Main number of phase	1 or 3			3	
	Reference	① LXM26DU10M3X	LXM26DU15M3X	LXM26DU20M3X	LXM26DU30M3X	LXM26DU45M3X
Circuit-breaker	Rating (A)	10	14	18	18	23
	Reference	② GV2P14	GV2P16	GV2P20	GV2P20	GV2P21
Contactor	Reference (1) (2)	③ LC1K12●●	LC1D18●●	LC1D32●●	LC1D32●●	LC1D65●●

(1) Composition of the contactors:

LC1 K06: 3 poles + 1 N/O auxiliary contact

LC1 D●●: 3 poles + 1 N/O auxiliary contact + 1 N/C auxiliary contact

Please refer to the "Control and protection components" catalog.

(2) Replace ●● with the control circuit voltage code given in the table below:

LC1K	Volts ~	220 Volts ~	230 Volts ~	240 Volts ~
	50/60 Hz	M7	P7	U7
LC1D	Volts ~	220/230 Volts ~	230 Volts ~	230/240 Volts ~
	50 Hz	M5	P5	U5
	60 Hz	M6	-	U6
	50/60 Hz	M7	P7	U7

For other available voltages between 24 V and 660 V, or a DC control circuit, please contact our Customer Care Center

Easy Lexium 26 servo drive - Protection using class J fuses



Protection using class J fuses (UL certification) - Mains supply voltage: 200...240 V a 50/60Hz

Fuse to be placed upstream (A)	5	5	5	20	20
Nominal power (kW)	0.05	0.1	0.2	0.4	0.75
Reference	LXM26DUA5M3X	LXM26DU01M3X	LXM26DU02M3X	LXM26DU04M3X	LXM26DU07M3X
Fuse to be placed upstream (A)	25	40	60	80	160
Nominal power (kW)	1	1	2	3	4.5
Reference	LXM26DU10M3X	LXM26DU15M3X	LXM26DU20M3X	LXM26DU30M3X	LXM26DU45M3X

Easy Lexium 26 servo drive - Holding brake controller



Holding brake controller

Description	24 V $\overline{\text{---}}$ power supply Max. power 0.05 kW IP 20, for mounting on 55 mm U rail
Reference	VW3M3103

Easy Lexium 26 servo drive - BCH2 servo motors



BCH2 servo motors

Brushless servo motor		B	C	H	2	•	•	••	•	•	C	•	•	C	
Inertia	Low inertia					L									
	Medium inertia					M									
	High inertia					H									
Flange size (mm)	40						B								
	60						D								
	80						F								
	100						H								
	130						M								
	180						R								
Rated output (W)	50W							A5							
	100W							01							
	200W							02							
	300W							03							
	400W							04							
	500W							05							
	600W							06							
	750W							07							
	850W							08							
	1 kW							10							
	1.5 kW							15							
	2 kW							20							
	3 kW							30							
	3.5 kW							35							
4.5 kW							45								
5.5 kW							55								
7.5 kW															
Power supply ~ 220 V Winding type (rpm)	1000/1500							1							
	2000							2							
	3000							3							
Shaft end	Keyed shaft (shaft & housing IP 65)										3				
Encoder	High resolution single-turn absolute encoder, 20-bit resolution										C				
	High resolution multi-turn absolute encoder, 20 bit resolution, 4096 turns										M				
Holding brake	Without brake										A				
	With brake (option)										F				
Connections	Free leads with connectors (BCH2•B/•D/•F motors only)										5				
	MIL connectors (BCH2•H/pM/•R motors only)										6				
Mechanical motor design	Motor compatible with Asian style mounting standards													C	

6

Easy Lexium 26 servo drive - Connection components



Shielded power cordsets for BCH2 motors without brake

Connector		1 Equipped with one quick connector (servo motor end), and open end (servo drive end)	2 Equipped with one MIL connector (servo motor end), and open end (servo drive end)					
AWG/mm ²		AWG18 / 4 x 1	AWG16 / 4 x 1.5	AWG12 / 4 x 4	AWG10 / 4 x 6	AWG8 / 4 x 8		
Reference	Length (m)	1.5	VW3M5D1AR15	-	-	-		
		3	VW3M5D1AR30	VW3M5D2AR30	VW3M5D4AR30	VW3M5D6AR30	VW3M5D7AR30	VW3M5D8AR30
		5	VW3M5D1AR50	VW3M5D2AR50	VW3M5D4AR50	VW3M5D6AR50	VW3M5D7AR50	VW3M5D8AR30

Shielded power cordsets for BCH2 motors with brake

Connector		1 Equipped with one quick connector (servo motor end), and open end (servo drive end)	2 Equipped with one MIL connector (servo motor end), and a free lead (servo drive end)					
AWG/mm ²		AWG18 / (4 x 1) + (2 x 1)	AWG16 / (4 x 1.5) + (2 x 1)	AWG12 / (4 x 4) + (2 x 1.5)	(4 x 6) + (2 x 1.5) / AWG10	AWG8 / (4 x 8) + (2 x 1.5)		
Reference	Length (m)	3	VW3M5D1FR30	VW3M5D2FR30	VW3M5D4FR30	VW3M5D6FR30	VW3M5D7AF30	VW3M5D8FR30
		5	VW3M5D1FR50	VW3M5D2FR50	VW3M5D4FR50	VW3M5D6FR50	VW3M5D7AF50	VW3M5D8FR50

Motor power connector kits

Description		3 Motor power connector kits (sold in lots of 3)		4 Power MIL connector kits		
For use with		BCH2●B/●D/●F motors (flange size: 40/60/80 mm) with flying lead connection, without brake	BCH2●B/●D/●F motors (flange size: 40/60/80 mm) with flying lead connection, with brake	BCH2●H/●M motors (flange size: 100/130 mm) with or without brake	BCH2●R motors (flange size: 180 mm, from 2.0 kW to 5.5 kW) with or without brake	BCH2●R motors (flange size: 180 mm, 7.5 kW)
Reference		VW3M5D1A	VW3M5D1F	VW3M5D2A	VW3M5D2B	VW3M5D2C

Shielded encoder cordsets

Description		1 Equipped with one plastic connector (servo motor end), and a firewire connector (servo drive end)			4 Equipped with one MIL connector (servo motor end), and a firewire connector (servo drive end)	
For use with		BCH2●B/●D/●F motors, for connection to CN2 interface			BCH2●H/●M/●R motors, for connection to CN2 interface	
Composition		10 x 0.13 mm ² / 10 x 26 AWG			10 x 0.13 mm ² / 10 x 26 AWG	
Reference	Length (m)	1.5	VW3M8D1AR15			-
		3	VW3M8D1AR30			VW3M8D2AR30
		5	VW3M8D1AR50			VW3M8D2AR50

Encoder connector kits

Description		3 Encoder connector kits including one plastic connector (servo motor end), and a firewire connector (servo drive end) (sold in lots of 2)		4 Encoder connector kits including one MIL connector (servo motor end), and a firewire connector (servo drive end) (sold in lots of 2)	
For use with		BCH2●B/●D/●F motors (flange: 40/60/80 mm) with flying lead connection		BCH2●H/●M/●R motors (flange: 100/130/180 mm) with MIL connector	
Reference		VW3M8D1A		VW3M8D2A	

Accessories for use with BCH2 motors with multi-turn absolute encoder

Description		5 Battery compartment	6 Battery 3.6 V
For use with		BCH2 motors with multi-turn absolute encoder	BCH2 motors with multi-turn absolute encoder and battery compartment "VW3M8BATC"
Reference		VW3M8BATC	VW3M9BATT



Easy Lexium 26 servo drive - Connection components

Selection of motor connector kit or encoder connector kit, according to BCH2 motor type												
Motor	Motor power cable connector kit		Encoder connector kit	Motor power cable		Encoder cable						
	Without brake	With brake		Without brake	With brake							
BCH2MBA53●●5C	VW3M5D1A	VW3M5D1F	VW3M8D1A	VW3M5D1AR●●	VW3M5D1FR●●	VW3M8D1AR●●						
BCH2MB0133●●5C												
BCH2LD0233●●5C												
BCH2LD0433●●5C												
BCH2LF0433●●5C												
BCH2HF0733●●5C												
BCH2LF0733●●5C												
BCH2LH1033●●6C	VW3M5D2A	VW3M5D2A	VW3M8D2A	VW3M5D2AR●●	VW3M5D2FR●●	VW3M8D2AR●●						
BCH2LH2033●●6C												
BCH2MM0813●●6C												
BCH2MM0313●●6C												
BCH2MM0523●●6C												
BCH2MM0613●●6C												
BCH2HM1023●●6C												
BCH2MM0913●●6C												
BCH2MM1523●●6C												
BCH2MM2023●●6C												
BCH2HR2023●●6C							VW3M5D2B	VW3M5D2B	VW3M8D2A	VW3M5D4AR●●	VW3M5D4FR●●	VW3M8D2AR●●
BCH2MR3013●●6C												
BCH2MR3023●●6C												
BCH2MR3523●●6C												
BCH2MR4513●●6C												
BCH2MR551●●●6C	VW3M5D2B	VW3M5D2B	VW3M8D2A	VW3M5D7AR●●	VW3M5D7FR●●	VW3M8D2AR●●						
BCH2MR751●●●6C							VW3M5D2C	VW3M5D2C	VW3M8D2A	VW3M5D8AR●●	VW3M5D8FR●●	VW3M8D2AR●●

6



07. Easy Modicon Logic Controllers

Easy Modicon M100 logic controllers



Easy Modicon M100 logic controllers (1)				
Number of digital I/O	16 ¹	24 ²	32 ³	40 ³
Digital inputs	<ul style="list-style-type: none"> ■ 9 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 3 regular inputs ■ 2 high speed inputs for HSC 	<ul style="list-style-type: none"> ■ 14 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 8 regular inputs ■ 2 high speed inputs for HSC 	<ul style="list-style-type: none"> ■ 20 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 14 regular inputs ■ 2 high speed inputs for HSC 	<ul style="list-style-type: none"> ■ 24 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 18 regular inputs ■ 2 high speed inputs for HSC
Digital outputs (relay outputs)	7	10	12	16
Serial link (2)	1			
Supply voltage	110...220 VAC			
Programming software (3)	EcoStruxure Machine Expert - Basic ⁴			
Reference	TM100C16RN	TM100C24RN	TM100C32RN	TM100C40RN

(1) M100 controllers are supplied with:

- fixed screw terminal blocks for connecting the I/O
- a fixed screw terminal block for connecting the power supply
- a fixed screw terminal block for the serial link

(2) Each M100 logic controller has an embedded USB mini-B programming port.

(3) PC should be equipped with Windows 7 or 10 (32-bit or 64-bit). To download this software, please visit our site www.schneider-electric.com.

Easy Modicon M200 logic controllers



Easy Modicon M200 logic controllers (1)

Supply voltage	110...220 VAC		
Number of digital I/O	16	24	32
Digital inputs	<ul style="list-style-type: none"> ■ 9 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 1 regular input ■ 4 high speed inputs for HSC 	<ul style="list-style-type: none"> ■ 14 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 6 regular inputs ■ 4 high speed inputs for HSC 	<ul style="list-style-type: none"> ■ 20 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 12 regular inputs ■ 4 high speed inputs for HSC
Digital outputs (relay outputs)	7	10	12
Dimension (W x H x D)	110 x 70 x 90 ¹	130 x 70 x 90 ²	175 x 70 x 90 ³
Ethernet (RJ 45)	–	–	1
Serial link (2)	1	–	–
Reference	TM200C16R	TM200C24R	TM200CE24R TM200C32R

Supply voltage	110...220 VAC		
Number of digital I/O	32	40	60
Digital inputs	<ul style="list-style-type: none"> ■ 20 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 12 regular inputs ■ 4 high speed inputs for HSC 	<ul style="list-style-type: none"> ■ 24 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 16 regular inputs ■ 4 high speed inputs for HSC 	<ul style="list-style-type: none"> ■ 36 sink/source ■ 24 VDC input voltage ■ 4 fast inputs for FC ■ 28 regular inputs ■ 4 high speed inputs for HSC
Digital outputs (relay outputs)	12	16	24
Dimension (W x H x D)	175 x 70 x 90 ³	–	225 x 70 x 90 ⁴
Ethernet (RJ 45)	1	–	1
Serial link (2)	1	–	–
Reference	TM200CE32R	TM200C40R	TM200CE40R TM200C60R

Supply voltage	24 VDC		
Number of digital I/O	16		
Digital inputs	<ul style="list-style-type: none"> ■ 9 sink/source ■ 24 VDC input voltage 	<ul style="list-style-type: none"> ■ 4 fast inputs for FC ■ 1 regular input 	<ul style="list-style-type: none"> ■ 4 high speed inputs for HSC
Digital outputs	<ul style="list-style-type: none"> ■ 7 sink outputs ■ 5 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO) 	–	<ul style="list-style-type: none"> ■ 7 source outputs ■ 5 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO)
Dimension (W x H x D)	110 x 70 x 90 ¹		
Ethernet (RJ 45)	–		
Serial link (2)	1		
Reference	TM200C16U		TM200C16T

Supply voltage	24 VDC		
Number of digital I/O	24		
Digital inputs	<ul style="list-style-type: none"> ■ 14 sink/source ■ 24 VDC input voltage 	<ul style="list-style-type: none"> ■ 4 fast inputs for FC ■ 6 regular inputs 	<ul style="list-style-type: none"> ■ 4 high speed inputs for HSC
Digital outputs	<ul style="list-style-type: none"> ■ 10 sink outputs ■ 8 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO) 	–	<ul style="list-style-type: none"> ■ 10 source outputs ■ 8 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO)
Dimension (W x H x D)	130 x 70 x 90 ²		
Ethernet (RJ 45)	–	1	–
Serial link (2)	1		
Reference	TM200C24U	TM200CE24U	TM200C24T TM200CE24T

Supply voltage	24 VDC		
Number of digital I/O	32		
Digital inputs	<ul style="list-style-type: none"> ■ 20 sink/source ■ 24 VDC input voltage 	<ul style="list-style-type: none"> ■ 4 fast inputs for FC ■ 12 regular inputs 	<ul style="list-style-type: none"> ■ 4 high speed inputs for HSC
Digital outputs	<ul style="list-style-type: none"> ■ 12 sink outputs ■ 10 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO) 	–	<ul style="list-style-type: none"> ■ 12 source outputs ■ 10 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO)
Dimension (W x H x D)	175 x 70 x 90 ³		
Ethernet (RJ 45)	–		
Serial link (2)	1		
Reference	TM200C32U		TM200C32T

Easy Modicon M200 logic controllers



Easy Modicon M200 logic controllers (1)			
Supply voltage	24 VDC		
Number of digital I/O	40		
Digital inputs	<ul style="list-style-type: none"> ■ 24 sink/source ■ 24 VDC input voltage 	<ul style="list-style-type: none"> ■ 4 fast inputs for FC ■ 16 regular inputs 	<ul style="list-style-type: none"> ■ 4 high speed inputs for HSC
Digital outputs	<ul style="list-style-type: none"> ■ 16 sink outputs ■ 14 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO) 	<ul style="list-style-type: none"> ■ 16 source outputs ■ 14 regular transistor outputs ■ 2 fast outputs (PWM/PLS/PTO) 	
Dimension (W x H x D)	175 x 70 x 90 ³		
Ethernet (RJ 45)	–	1	1
Serial link (2)	1		
Reference	TM200C40U	TM200CE40U	TM200C40T TM200CE40T

(1) M200 controllers are supplied with:

- removable screw terminal blocks for connecting the I/O
- a removable screw terminal block for connecting the power supply
- a removable screw terminal block for the serial link

(2) Each M200 logic controller has an embedded USB mini-B programming port.

Easy Modicon M200 logic controllers - Accessories



Cartridges for Easy Modicon M200 logic controllers (1)

Description	Digital I/O cartridges		Communication cartridges		
Details	<ul style="list-style-type: none"> 2 digital inputs 2 transistor sink outputs Connection via screw terminal block 		1 additional RS232C or RS485 serial link on screw terminal block	1 additional isolated RS485 serial link on screw terminal block	
Reference	TMCR2DM4U		TMCR2SL1	TMCR2SL1A	
Description	Analog I/O cartridges				
Details	<ul style="list-style-type: none"> 2 analog inputs (12-bit resolution) configurable as: <ul style="list-style-type: none"> - 0...10 V voltage - 0...20 mA/4...20 mA current Connection via screw terminal block 		<ul style="list-style-type: none"> 2 analog inputs (12-bit resolution) 0...10V/ 0...5V/ 0...20mA / 4...20mA 1 analog output (12-bit resolution) 0...10V/ 0...5V/ 0...20mA / 4...20mA Connection via screw terminal block 	<ul style="list-style-type: none"> 2 temperature inputs (12 or 14-bit resolution depending on input signal) type K, J, R, S, B, E, T, N, C, PT100, PT1000, NI100, NI1000 Connection via screw terminal block 	
Reference	TMCR2AI2		TMCR2AM3	TMCR2TI2	
Description	Analog I/O cartridges				
Details	<ul style="list-style-type: none"> 2 analog outputs (12-bit resolution) 0...10 V voltage Connection via screw terminal block 		<ul style="list-style-type: none"> 2 analog outputs (12-bit resolution) 4...20 mA current Connection via screw terminal block 		
Reference	TMCR2AQ2V		TMCR2AQ2C		



Separate parts for Easy Modicon M200 logic controllers

Description	Cartridges cover ¹	RTC battery ²
Reference	TMARCOVER	TMARBAT1

Replacements parts for Easy Modicon M200 logic controllers ³

Description	Set of terminal blocks for connecting the I/O on M200 controllers	
Details	3-way terminal block for power supply connection	4-way terminal block for serial link connection
Reference	TMARTB3	TMARTB4

Expansion modules

Description	Modicon TM3 expansion modules	Modicon TM2 expansion modules
Details	Easy Modicon M200 logic controllers	
Reference	<i>(2)</i>	

(1) One cartridge for controllers with 16 and 24 I/O. Two cartridges maximum for controllers with 32, 40 and 60 I/O, only one of which can be a communication cartridge.

(2) See our list of compatible expansion modules on next page.

Easy Modicon M200 logic controllers - Product compatibility

Product compatibility			M200 logic controllers			
Expansion options			Number and type of I/O	TM200C16R	TM200C16U	TM200C16T
Modicon TM3	Digital modules	TM3DI8	8 x 24 V $\overline{\text{---}}$ sink/source inputs			
		TM3DI16	16 x 24 V $\overline{\text{---}}$ sink/source inputs			
		TM3DI32K	32 x 24 V $\overline{\text{---}}$ sink/source inputs			
		TM3DQ8R	8 x 24 V $\overline{\text{---}}$ /240 V a relay outputs			
		TM3DQ8T	8 x 24 V $\overline{\text{---}}$ source transistor outputs			
		TM3DQ8U	8 x 24 V $\overline{\text{---}}$ sink transistor outputs			
		TM3DQ16R	16 x 24 V $\overline{\text{---}}$ /240 V \sim relay outputs			
		TM3DQ16T	16 x 24 V $\overline{\text{---}}$ source transistor outputs			
		TM3DQ16U	16 x 24 V $\overline{\text{---}}$ sink transistor outputs			
		TM3DQ32TK	32 x 24 V $\overline{\text{---}}$ source transistor outputs			
		TM3DQ32UK	32 x 24 V $\overline{\text{---}}$ sink transistor outputs			
		TM3DM8R	4 x 24 V $\overline{\text{---}}$ sink/source inputs + 4 x 24 V $\overline{\text{---}}$ /240 V \sim relay outputs			
		TM3DM24R	16 x 24 V $\overline{\text{---}}$ sink/source inputs + 8 x 24 V $\overline{\text{---}}$ /240 V \sim relay outputs			
		TM3RDM16R	8 x 24 V $\overline{\text{---}}$ sink/source inputs + 8 x 24 V $\overline{\text{---}}$ /240 V \sim relay outputs			
		TM3RDM32R	16 x 24 V $\overline{\text{---}}$ sink/source inputs + 16 x 24 V $\overline{\text{---}}$ /240 V \sim relay outputs			
	Analog modules	TM3AI2H	2 voltage/current inputs			
		TM3AI4	4 voltage/current inputs			
		TM3TI4	4 voltage/current or temperature inputs			
		TM3AI8	8 voltage/current inputs			
		TM3TI8T	8 temperature inputs			
		TM3AQ2	2 voltage/current outputs			
		TM3AQ4	4 voltage/current outputs			
		TM3TM3	2 voltage/current or temperature inputs + 1 voltage/current outputs			
		TM3AM6	4 voltage/current inputs + 2 voltage/current outputs			

Possible to combine, up to 4 modules

7

Easy Modicon M200 logic controllers - Configuration

Configuration (1)(2)								
Configuration limits	Logic controllers							
Maximum number of transistor outputs	130	137	137	130	140	140	132	144
Maximum number of relay outputs	71	64	64	74	64	64	76	64
References	TM200C16R	TM200C16T	TM200C16U	TM200C24R TM200CE24R	TM200C24T TM200CE24T	TM200C24U TM200CE24U	TM200C32R TM200CE32R	TM200C32T
Configuration limits	Logic controllers							
Maximum number of transistor outputs	144	132	148	148	132			
Maximum number of relay outputs	64	80	64	64	88			
References	TM200C32U	TM200C40R TM200CE40R	TM200C40T TM200CE40T	TM200C40U TM200CE40U	TM200C60R			

(1) Modicon TM3 or TM2 digital I/O modules connect to Modicon M200 logic controllers with a maximum of 4 local I/O modules.

(2) The maximum number of Modicon TM3/TM2 expansion modules can be reduced by the number of transistor outputs or relay outputs used (see the table below). For more information on TM3/TM2 expansion modules, please visit our website www.schneider-electric.com.











08. Easy Sensor

Easy Sensor - Limit switch

Type of head	Plunger (fixing by the body)			Rotary (fixing by the body)	
XCE					
Type of operator	Steel end plunger	Steel roller plunger for lateral cam movement	Steel roller plunger for traverse cam movement	Thermoplastic roller lever	Steel roller lever
References of complete switches with Flexible rubber cable gland suitable for cable Ø 6...9 mm					
1 NO + 1 NC (form Za)	XCE110C	XCE102C	XCE103C	XCE118C	XCE119C

Type of head	Rotary (fixing by the body)			Multi-directional	
XCE					
Type of operator	Variable length thermo-plastic roller lever	Variable length metal roller lever	Round Ø 3 mm steel rod	"Cat's whisker"	Spring rod lever with thermoplastic end
References of complete switches with Flexible rubber cable gland suitable for cable Ø6...9 mm					
1 NO + 1 NC (form Za)	XCE145C	XCE146C	XCE154C	XCE106C	XCE181C

Type of head	Plunger (fixing by head or body)							
XCJ								
Type of operator	Steel end plunger	Steel roller plunger for lateral cam movement	Steel roller plunger for traverse cam movement	Short flat lever plunger	Long flat lever plunger	Short flat roller lever plunger	Long flat roller lever plunger	Short flat roller lever plunger, one way operation
References of complete switches with Flexible rubber cable gland suitable for cable Ø6...9 mm								
Single pole 1 C/O (form C)	XCJ110C	XCJ102C	XCJ103C	XCJ125C	XCJ126C	XCJ127C	XCJ128C	XCJ121C

Life Is On



Learn more about automation and control solutions
at www.schneider-electric.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Schneider Electric Industries SAS
35, rue Joseph Monier - CS 30323
F92506 Rueil-Malmaison Cedex