

Product Environmental Profile

Load Correction Device






General information

Representative product	Load Correction Device - 31LCDA
Description of the product	The main purpose of the Load Correction Device is to improve the Load and performance of various two-wire electronic controls such as dimmers.
Functional unit	To improve dimming performance and load stability for low-power dimmable CFL or LED lighting loads across a wide dimming range, to provide a positive off-state for phase-controlled dimmer channels controlling electronic lighting loads during 2 years, in accordance with IEC 61547 and IEC 61347-2. - Operate voltage: 220~240V AC, typical 50Hz only. - Load rate: 450W MAX.



Constituent materials

Reference product mass 39 g including the product, its packaging and additional elements and accessories

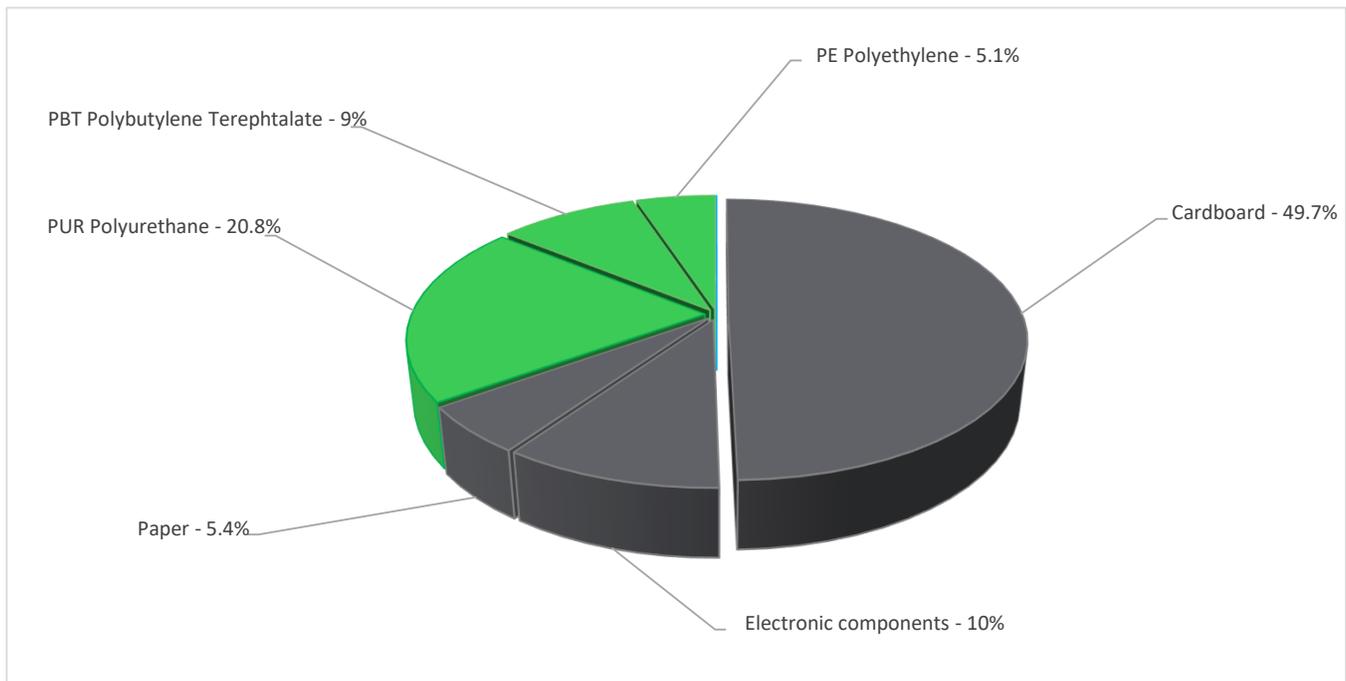

Plastics	34.9%
Metals	0.0%
Others	65.1%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Load Correction Device presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 21.4 g, consisting of Cardboard (90.7%), Paper (9.3%).
Installation	Ref 31LCDA does not require any installation operations.
Use	The product does not require special maintenance operations.
End of life	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains External cable (2.3g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</p> <p>Recyclability potential: 13% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>



Environmental impacts

Reference life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special components needed			
Use scenario	The product is in active mode 50% of the time with a power use of 2.5W and in stand-by mode 50% of the time with a power use of 0.5W, for 2 years.			
Geographical representativeness	Austria			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU

Compulsory indicators		Load Correction Device - 31LCDA					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.00E-04	1.99E-04	0*	0*	5.77E-07	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.56E-01	5.58E-03	1.15E-04	2.42E-05	1.50E-01	3.27E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	4.07E-02	1.00E-03	2.65E-05	5.87E-06	3.96E-02	1.08E-05
Contribution to global warming	kg CO ₂ eq	1.48E+02	2.09E+00	2.52E-02	0*	1.46E+02	2.78E-02
Contribution to ozone layer depletion	kg CFC11 eq	1.99E-06	2.30E-07	0*	0*	1.76E-06	1.09E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2.09E-02	5.29E-04	8.20E-06	0*	2.04E-02	3.42E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	1.68E-01	1.92E-02	0*	0*	1.49E-01	2.31E-05
Total Primary Energy	MJ	2.18E+03	2.99E+01	3.56E-01	0*	2.15E+03	0*

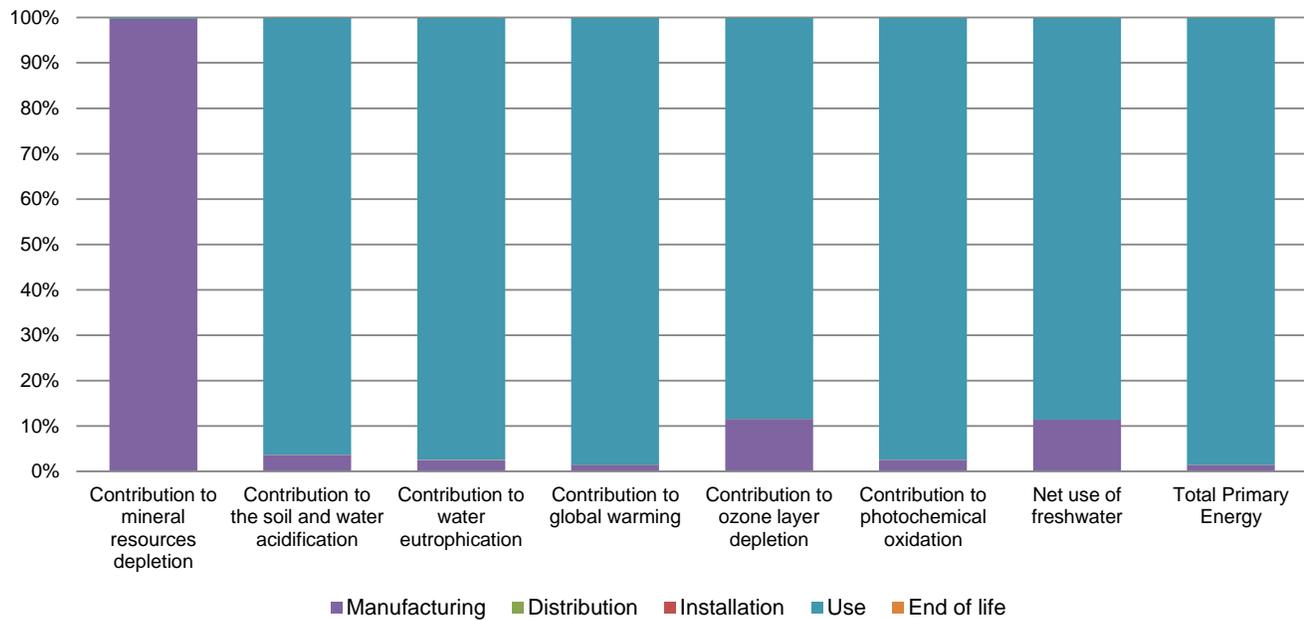

Optional indicators		Load Correction Device - 31LCDA						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	2.05E+03	2.07E+01	3.53E-01	0*	2.03E+03	0*	
Contribution to air pollution	m ³	1.43E+04	2.37E+02	0*	0*	1.41E+04	0*	
Contribution to water pollution	m ³	7.15E+03	4.24E+02	4.14E+00	8.80E-01	6.71E+03	1.37E+01	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	4.65E-04	4.65E-04	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	5.77E+01	1.47E+00	0*	0*	5.62E+01	0*	
Total use of non-renewable primary energy resources	MJ	2.12E+03	2.84E+01	3.55E-01	0*	2.09E+03	0*	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.56E+01	0*	0*	0*	5.62E+01	0*	
Use of renewable primary energy resources used as raw material	MJ	2.11E+00	2.11E+00	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.12E+03	2.59E+01	3.55E-01	0*	2.09E+03	0*	
Use of non renewable primary energy resources used as raw material	MJ	2.55E+00	2.55E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	4.90E+00	3.15E-01	0*	0*	4.41E+00	1.76E-01	
Non hazardous waste disposed	kg	2.72E+01	3.33E+00	0*	0*	2.39E+01	0*	
Radioactive waste disposed	kg	1.57E-03	5.35E-04	6.37E-07	0*	1.04E-03	8.89E-07	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	1.36E-01	1.77E-02	0*	1.06E-01	0*	1.18E-02	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	3.00E-03	0*	0*	0*	0*	3.00E-03	
Exported Energy	MJ	3.38E-04	3.18E-05	0*	3.06E-04	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase has the greatest impact on Abiotic depletion. The use phase has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1308010_V2	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	10/2020	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1308010_V2

© 2019 - Schneider Electric – All rights reserved

10/2020