

WATERPROOF SPLICE TERMINALS


Product Description:

Cabac Waterproof Splice Terminals are designed to provide reliable and durable electrical connections in various environments. These terminals feature a glue-lined heat shrink insulation that is applied after crimping, ensuring a completely waterproof seal. Made from high-quality copper and heat shrink materials, these terminals offer excellent conductivity and protection against moisture and other environmental factors. With a maximum voltage rating of 600V, Cabac Waterproof Splice Terminals are suitable for a wide range of electrical applications where moisture resistance is essential.

Additionally, these terminals are certified by UL, ROHS, REACH, and CE, ensuring compliance with industry standards for safety and environmental sustainability.


Key Features:

- Glue-lined heat shrink insulation provides a completely waterproof connection.
- Shrinkage temperature of 180°C ensures secure sealing of the terminal.
- Made from durable copper and heat shrink materials for reliable performance.
- Maximum voltage rating of 600V for versatility in electrical applications.
- Certifications including UL, ROHS, REACH, and CE ensure compliance with industry standards.

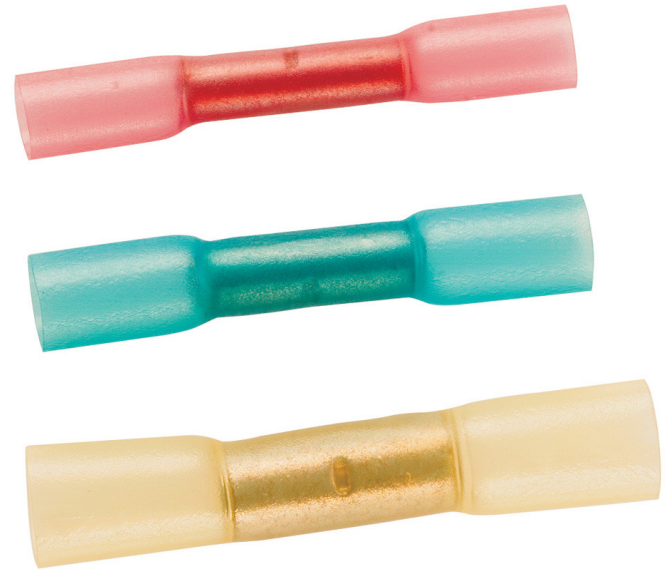

Part No.	Description	Conductor Size	Unit	Qty
WPS1.25	Waterproof Splice Red	0.5-1.6mm ²	Pack	25
WPS2	Waterproof Splice Blue	1.0-2.6mm ²	Pack	25
WPS5.5	Waterproof Splice Yellow	2.5-6.0mm ²	Pack	25

Part No.	L mm (±3.00)	d1 mm (±0.40)	L1 mm (±0.50)	T mm (±0.05)
WPS1.25	36.00	1.85	15.00	0.75
WPS2	35.50	2.50	15.00	0.80
WPS5.5	40.50	3.60	15.00	0.95

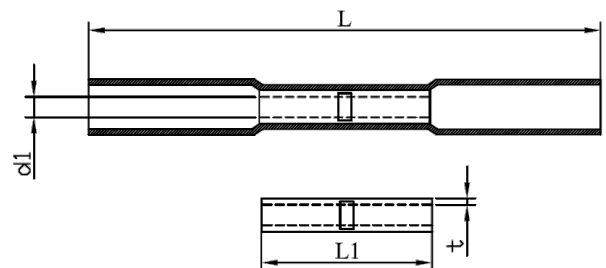

Note: For optimal performance, use Cabac crimping tool K10/3 for CABAC Waterproof Splice Terminals.

MKT333

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.