

Push-button Range

56PB Series

Rated Insulation Voltage U_i - 600~

Rated Thermal Current I_{th} - 10A

Rated Operational Current i_e :

AC15 6A @ 110V~

3A @ 240V~

1.2A @ 415V~

Short Circuit Protection: 10A with gL type fuse

Mechanical Endurance

Push Buttons - 5000 000 cycles

Contact Blocks - 5000 000 cycles

Twist to Release Actuators - 300 000 cycles

Electrical Endurance

Contact Blocks - 1000 000 cycles

Nominal Frequency of Operation


Electrical - 600 operations per hour

Mechanical - 3600 operations per hour

Terminals can accommodate up to

2 x 2.5mm² conductors.

Wiring Instructions

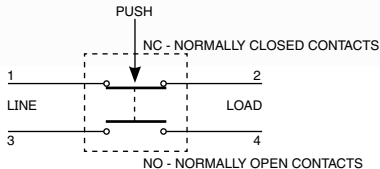

Start button normally open contacts.
Stop button normally closed contacts.

Product of Clipsal Australia Pty Ltd

A member of Schneider Electric

clipsal.com

National Customer Care Enquiries:

Tel 1300 2025 25 Fax 1300 2025 56

© Clipsal Australia Pty Ltd. The identified trademarks and copyrights are the property of Clipsal Australia Pty Ltd unless otherwise noted.