


Catalogue No: CA8-5-10-24VAC

CONTACTOR MINI 2.2kW 3P 24V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA8 Miniature Contactors 2.2 to 5.5kW > 3 Pole Contactors with AC Coil

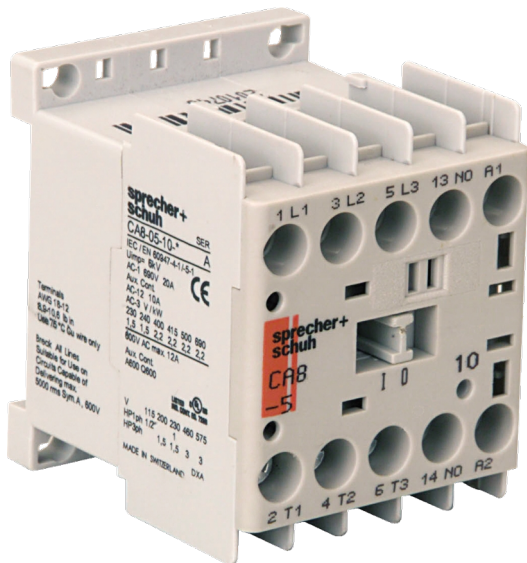

Mini Contactor 3 pole 5A 2.2kW 1N/O Auxiliary 24V AC Coil

- Features low-profile design and 45mm width, permitting the use of enclosures with shallow mounting depths
- Accessories require no additional panel space
- Available in AC or DC control coil versions to suit your application requirements
- DIN rail mountable for easy installation

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	CA8-05
Component Type	Motor Control and Drives
Standard Contactor	
Ie, Rated Operational Current, AC-1, 415V, 40°C	20 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	2.2 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	4.9 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	2.2 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	2.8 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Integrated Aux	1 N/O
Coil Voltage	24 V AC V
IP Rating	IP20

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-


Catalogue No: CA8-5-10-24VAC

CONTACTOR MINI 2.2kW 3P 24V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA8 Miniature Contactors 2.2 to 5.5kW > 3 Pole Contactors with AC Coil



Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

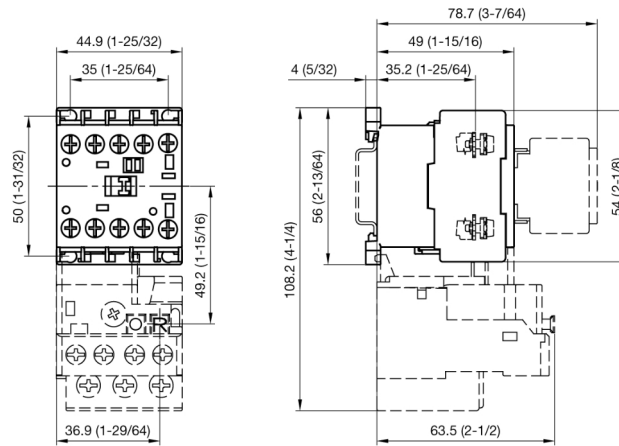

REVERSING CONTACTORS & ACCESSORIES

Contactor with...	Dim. [mm]	
reversing with mechanical interlock	89.8	
with aux. contact block	78.7	
with timer	on contactor	81.7
	at side of contactor	66.9
with protection element		
with nameplate	51	

Dimension Diagram