

Product Environmental Profile

iAUXILIARY iMX+OF






General information

Representative product	iAUXILIARY iMX+OF - A9A26946
Description of the product	The electrical auxiliaries are combined with iC60,iC40,iCV40, iDPN Vigi circuit breakers, iID, iID40 residual current circuit breakers, remote tripping switch disconnecter ISW-NA; They enable tripping upon a fault. They are fastened by clips (without tools) to the left side of the breaker.iMX+OF is shunt release with open/close contact
Functional unit	The main purpose of Auxiliary MX+OF is as an emergency stoppage by normally open push button and the remote indication of the position of the associated device.To trips the associated device when it is powered on during 20 years with 100/415V AC-50/60Hz.



Constituent materials

Reference product mass 86.73 g including the product, its packaging and additional elements and accessories

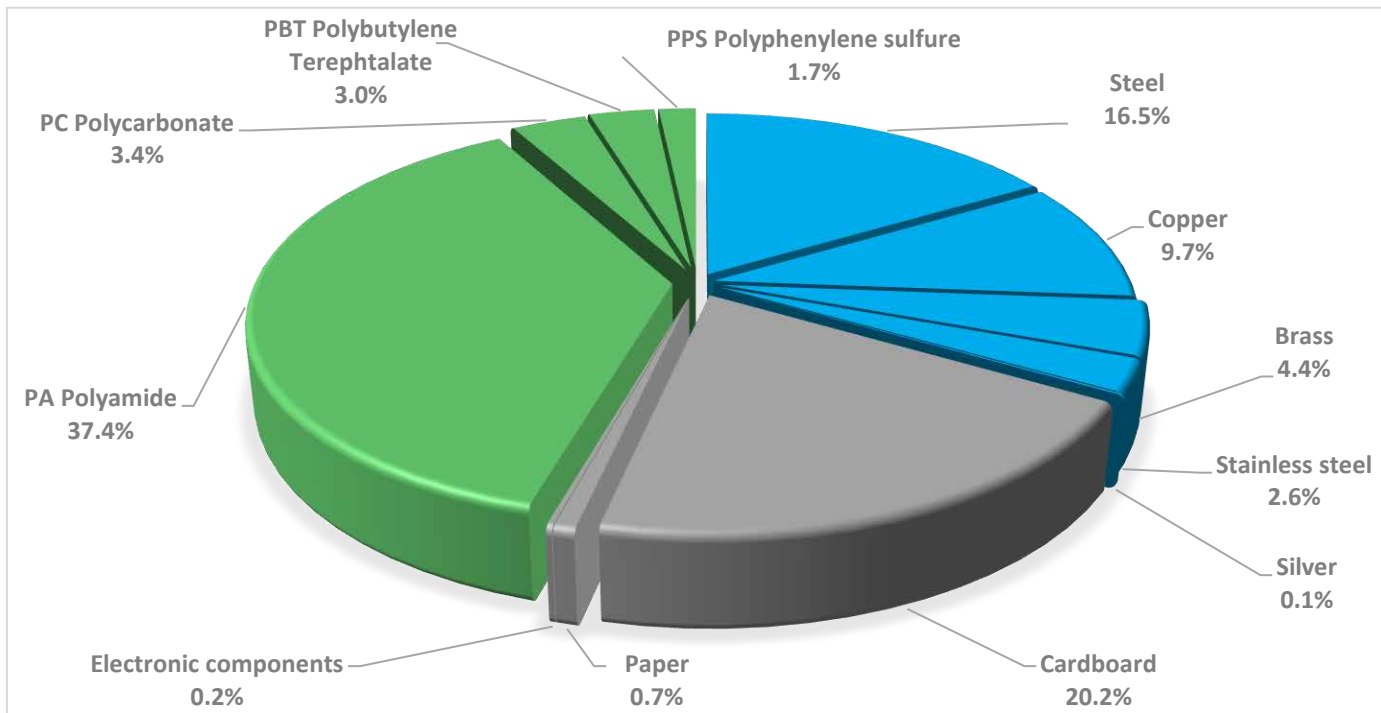

Plastics	45.5%
Metals	33.3%
Others	21.1%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The iAUXILIARY iMX+OF presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 18.73 g, consisting of cardboard(97%),paper(3%)
Installation	RefA9A26946 does not require any installation operations
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 40% Based on "ECO'DEEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	20 years								
Product category	Blocks and differential switches								
Installation elements	No special components needed								
Use scenario	Load rate: 50% of In Use time rate: 30% of RLT								
Geographical representativeness	Europe								
Technological representativeness	The electrical auxiliaries are combined with iC60,iC40,iCV40, iDPN Vigi circuit breakers, iLD, iLD40 residual current circuit breakers, remote tripping switch disconnecter ISW-NA; They enable tripping upon a fault. They are fastened by clips (without tools) to the left side of the breaker.iMX+OF is shunt release with open/close contact								
Energy model used	<table border="1"> <thead> <tr> <th>Manufacturing</th> <th>Installation</th> <th>Use</th> <th>End of life</th> </tr> </thead> <tbody> <tr> <td>Energy model used: Belgium</td> <td>Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27</td> <td>Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27</td> <td>Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27</td> </tr> </tbody> </table>	Manufacturing	Installation	Use	End of life	Energy model used: Belgium	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27
Manufacturing	Installation	Use	End of life						
Energy model used: Belgium	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27						

Compulsory indicators		iAUXILIARY iMX+OF - A9A26946					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.10E-04	1.06E-04	0*	0*	1.05E-04	0*
Contribution to the soil and water acidification	kg SO ₂ eq	5.02E+00	9.36E-04	0*	0*	5.02E+00	0*
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3.04E-01	3.72E-04	0*	0*	3.03E-01	0*
Contribution to global warming	kg CO ₂ eq	1.20E+03	4.35E-01	0*	0*	1.20E+03	0*
Contribution to ozone layer depletion	kg CFC11 eq	7.85E-05	1.14E-07	0*	0*	7.84E-05	0*
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2.76E-01	1.01E-04	0*	0*	2.76E-01	0*
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	4.37E+03	0*	0*	0*	4.37E+03	0*
Total Primary Energy	MJ	2.40E+04	4.37E+00	0*	0*	2.40E+04	0*

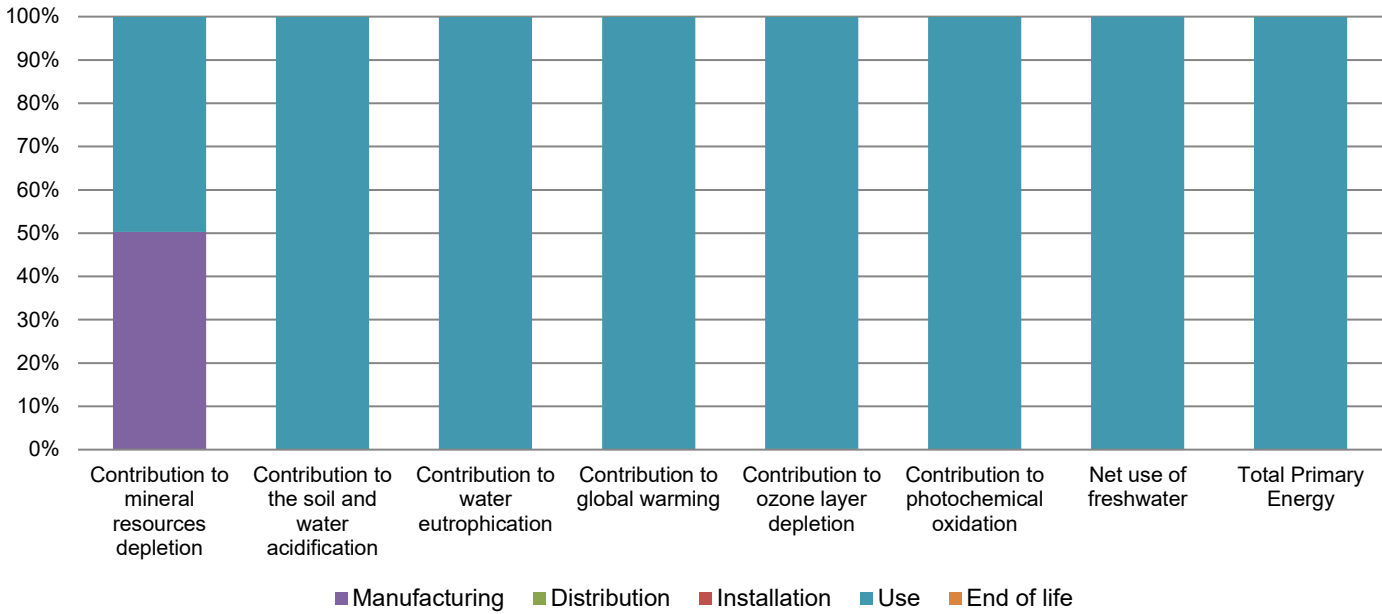

Optional indicators		iAUXILIARY iMX+OF - A9A26946						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	1.37E+04	3.40E+00	0*	0*	1.37E+04	0*	
Contribution to air pollution	m³	5.19E+04	1.11E+02	0*	0*	5.18E+04	0*	
Contribution to water pollution	m³	4.99E+04	1.82E+02	0*	0*	4.97E+04	0*	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	1.91E-03	1.91E-03	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	3.06E+03	5.09E-01	0*	0*	3.06E+03	0*	
Total use of non-renewable primary energy resources	MJ	2.10E+04	3.86E+00	0*	0*	2.10E+04	0*	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.06E+03	0*	0*	0*	3.06E+03	0*	
Use of renewable primary energy resources used as raw material	MJ	3.56E-01	3.56E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.10E+04	2.80E+00	0*	0*	2.10E+04	0*	
Use of non renewable primary energy resources used as raw material	MJ	1.06E+00	1.06E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	3.92E+00	3.19E+00	0*	0*	6.28E-01	1.08E-01	
Non hazardous waste disposed	kg	4.49E+03	0*	0*	0*	4.49E+03	0*	
Radioactive waste disposed	kg	3.00E+00	0*	0*	0*	3.00E+00	0*	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	5.12E-02	6.42E-03	0*	1.78E-02	0*	2.70E-02	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	2.16E-03	2.74E-04	0*	0*	0*	1.88E-03	
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.0, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1305024_V2-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	10/2018	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1305024_V2-EN

© 2017 - Schneider Electric – All rights reserved

10/2018