



PIXIE SMART DIMMER SDD350BT G2


SMART HOME push button dimmer, Generation 2

Application

Smart digital lighting control with Bluetooth Mesh Technology for residential and commercial spaces

Design Specifications

- Digital push button control, with three (3) complimentary key caps provided to suit most switch plates
- When used as a digital device, push on/off, hold to dim up or down, memory function, selectable minimum dim level
- When used with the SAL PIXIE or PIXIE PLUS app, set a scene, group devices, set a schedule, dim, switch, set a timer
- With the inclusion of the SAL PIXIE Gateway and the internet, you can control your PIXIE devices from anywhere in the world
- Overheating, overload and full short circuit protection, maximum load 350 watt, minimum load 2 watt*
- SMART LED indicator, Trailing edge phase cutting dimming, Fits most branded switch plates. 1, 2 or 3 gang, complies to AS/NZS 60669.2.1, typical wireless range 15 metres

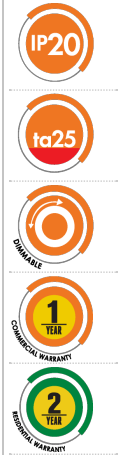

Performance

Dimmable - **YES**
Dimmer Type - **Trailing edge**

Technical Specification

Model No.	Power (W)	Input Voltage (V/AC)	Dim (mm)
SDD350BT G2	350	240	40(L) x 24(W) x 38(H)


*Subject to product capability, this size load may require the inclusion of the LOAD capacitor included in the product carton

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Wiring Diagram

SDD350BT G2 - Standard wiring diagram

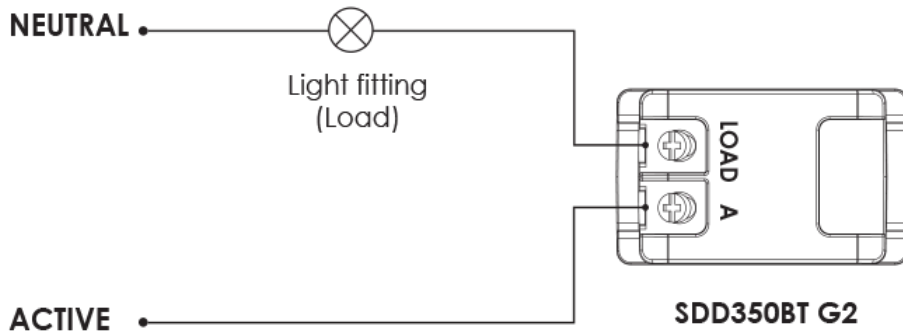

SDD350BT G2 - Optional wiring diagram

