

Weathershield Flush Series

WSF/WSCF Series


Installation Instructions

WSF/WSCF Pack includes:

- Switch or Switch Socket
- Weatherproof Shroud and 2 x M3.5 x 50mm 0.8 Pitch metal thread screw
- Shallow Mounting Block 2 x 13mm s/s thread forming 'PT' screw and gasket (switch only)
- 2 x No.9 caps

WSF/WSCF Series can be mounted flush utilising the following two installation methods:


Wall Box/Bracket Installation

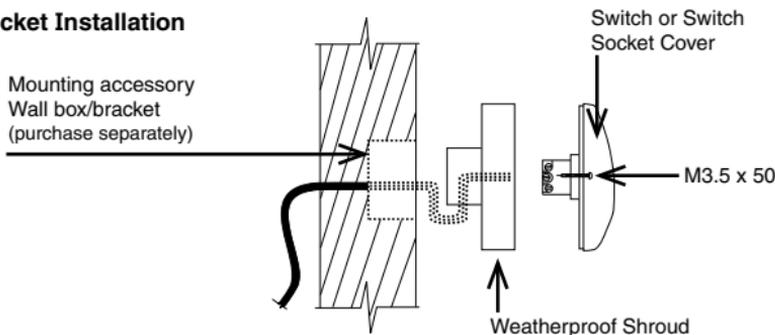

Assembly:

1. Fasten wall box/bracket into wall cavity.
2. Fit-off circuit cabling.
3. Place metal thread screw through cover, weatherproof shroud and fix to mounting accessory. Push in No. 9 caps.

Shallow Mounting Block Installation

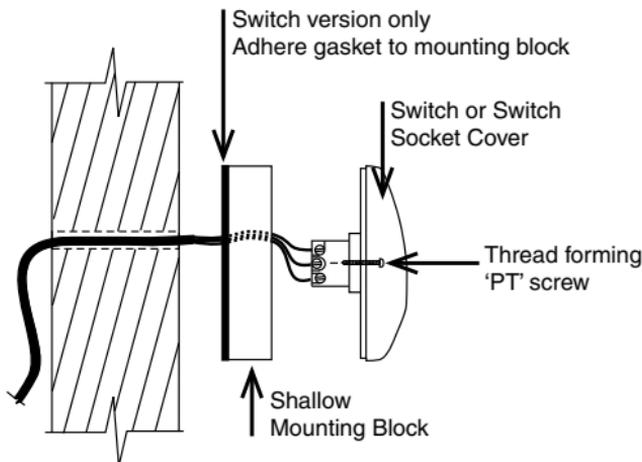

Assembly:

1. Adhere gasket to mounting block on WSF Series only.
2. Fasten mounting block to wall. Push caps over screws.
3. Fit-off circuit cabling.
4. Place thread forming 'PT' screw through cover and fix to shallow mounting block. Push in No. 9 caps.

Note:

WSF226/3 - 90B Shroud can be purchased separately for additional protection.

WSF226 & WSF226/2 - WSF226S Shroud can be purchased separately for additional protection.

For uneven wall surfaces chalking compound may be required.

Schneider Electric (Australia) Pty Ltd

Contact us: clipsal.com/feedback

clipsal.com

National Customer Care Enquiries:

Tel 1300 2025 25

Fax 1300 2025 56

Schneider Electric (Australia) Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

© 2012 Schneider Electric. All Rights Reserved.

Trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.