

CHSWVA1G CHSWVA2G CHSWVA3G

* LESWM switch mechanism used in conjunction with Cheetah plates

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Cheetah Range of Architrave Switches

- Switches are rated 250V 16AX/20A and approved to AS/NZS60669-1
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Colour: White
- Typical example of size seen below:

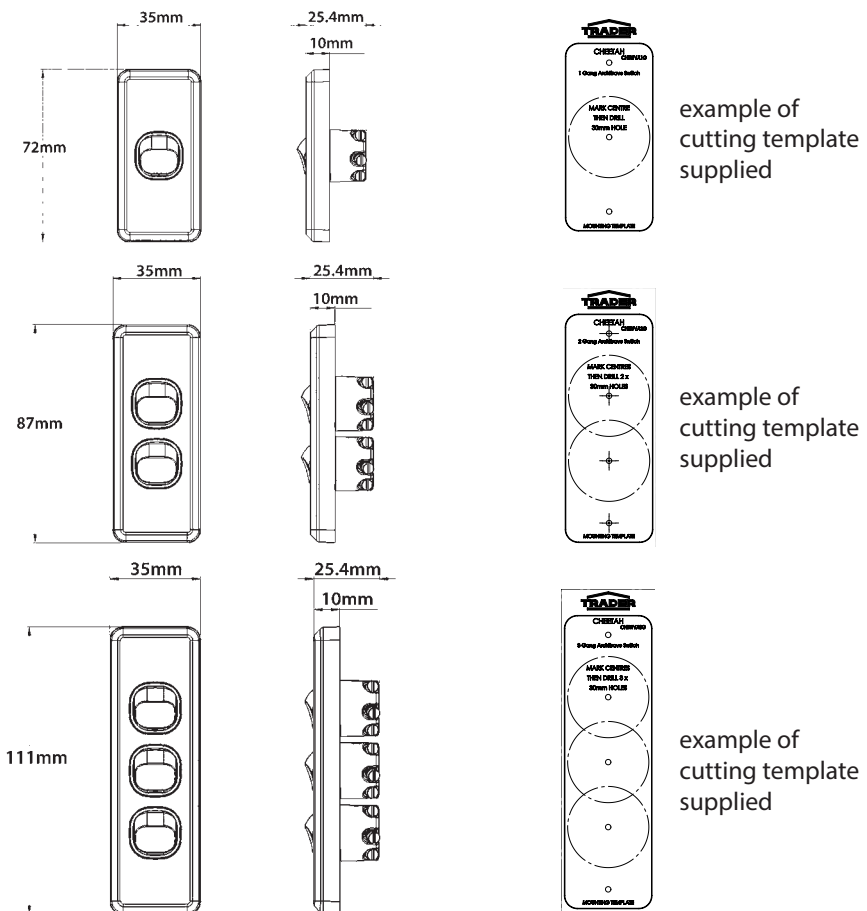

Catalogue Number	Description
CHSWVA1G	Switch Vertical Architrave 1 Gang, 16AX/20A 250V~
CHSWVA2G	Switch Vertical Architrave 2 Gang, 16AX/20A 250V~
CHSWVA3G	Switch Vertical Architrave 3 Gang, 16AX/20A 250V~

LEOPARD  CHEETAH 

The Leopard Switch Mechanism is the same mechanism used in the Cheetah Range - LESWM

Certification Number:
GMA-500226-EA

GSM Electrical (Australia) Pty Ltd
Level 2/142-144 Fullarton Road, ROSE PARK SA 5067
p: 1300 301 838 f: 1300 301 778 e: service@gsm.com.au
www.gsm.com.au

