


Product Environmental Profile

SpaceLogic C-Bus DALI-2 Gateway



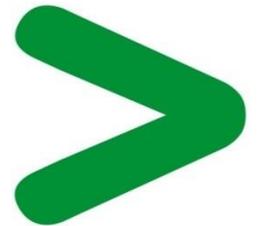


General information

Representative product	SpaceLogic C-Bus DALI-2 Gateway - 5502CDGP230
Description of the product	C-Bus to DALI Interface for Control, Monitoring, Commissioning of Lighting and Emergency Lighting.
Functional unit	The main functions of this product is to provide support, remote ON-OFF, lighting and control other electrical devices for a simple C-Bus network, and permitting all channels to be turned On or Off without C-Bus network communications with a voltage range between 220-240V according to IEC669-2-2. While protecting the user from direct contact with live parts and with a protection class IP20 in accordance with AS/NZS 3100. Emergency Lighting and Exit Testing refer to standards: IEC 62034.



Constituent materials

Reference product mass 303.86 g including the product, its packaging and additional elements and accessories

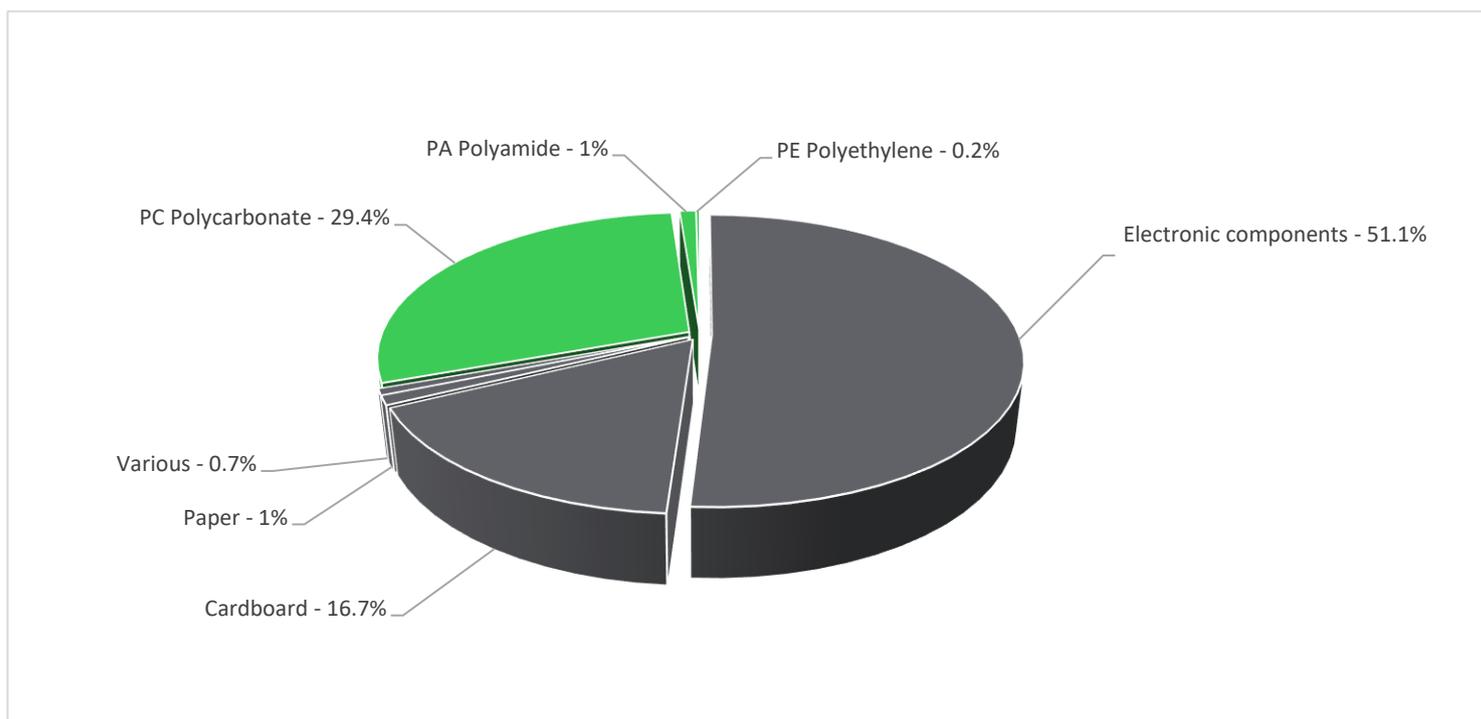

	Plastics	30.6%
	Metals	0.0%
	Others	69.5%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The SpaceLogic C-Bus DALI-2 Gateway presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 53.86 g, consisting of Cardboard(94.8%), PE film(4.3%), Paper(0.9%)
Installation	Ref 5502CDGP230 does not require any installation operations
Use	The product does not require special maintenance operations.
End of life	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains Two Electronic cards (45.5g, 95g), external electric cable (16g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website</p> <p>http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</p> <p>Recyclability potential: 40% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>



Environmental impacts

Reference life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
Use scenario	The product is in active mode of the full time with a power use of 13w, for 10 years.			
Geographical representativeness	Australia			
Technological representativeness	C-Bus to DALI Interface for Control, Monitoring, Commissioning of Lighting and Emergency Lighting.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU

Compulsory indicators		SpaceLogic C-Bus DALI-2 Gateway - 5502CDGP230					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.71E-03	1.70E-03	0*	0*	5.00E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.32E+00	1.82E-02	1.79E-04	0*	1.30E+00	1.40E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3.47E-01	3.75E-03	4.12E-05	0*	3.43E-01	7.15E-05
Contribution to global warming	kg CO ₂ eq	1.28E+03	9.80E+00	0*	0*	1.27E+03	2.31E-01
Contribution to ozone layer depletion	kg CFC11 eq	1.63E-05	1.10E-06	0*	0*	1.52E-05	7.99E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1.79E-01	2.05E-03	0*	0*	1.77E-01	0*
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	1.35E+00	5.65E-02	0*	0*	1.29E+00	0*
Total Primary Energy	MJ	1.87E+04	1.25E+02	0*	0*	1.86E+04	0*

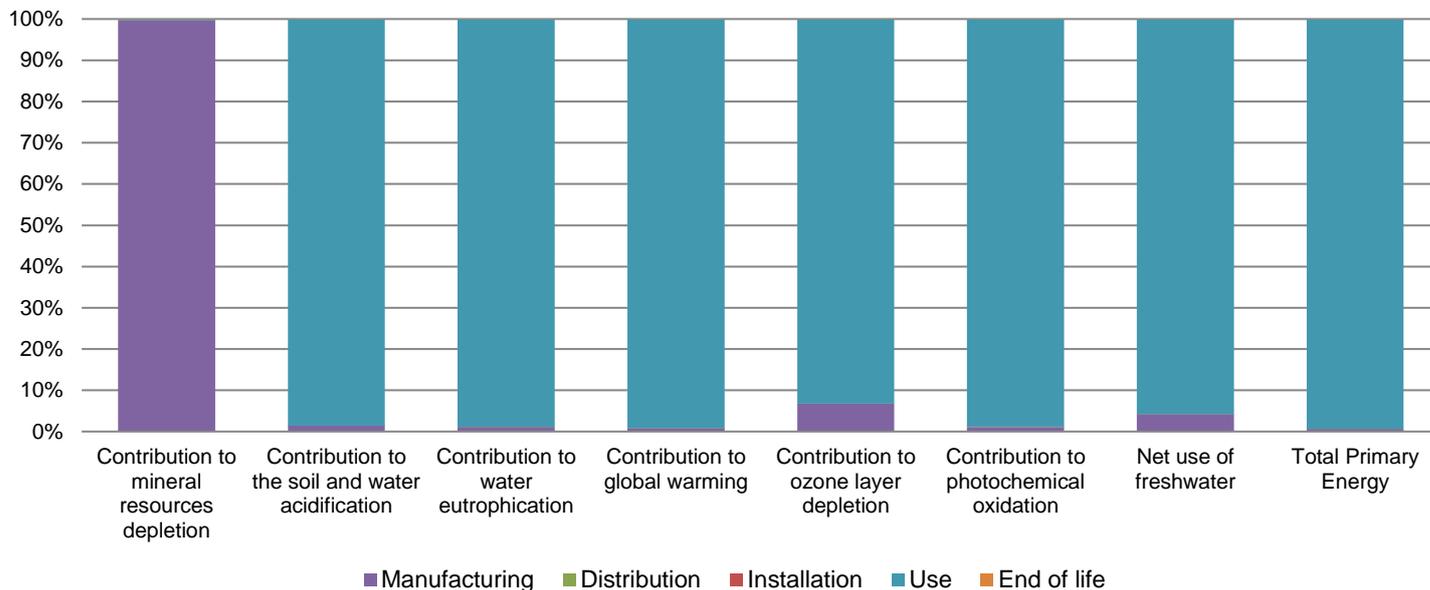

Optional indicators		SpaceLogic C-Bus DALI-2 Gateway - 5502CDGP230					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.77E+04	8.59E+01	0*	0*	1.76E+04	0*
Contribution to air pollution	m³	1.23E+05	9.84E+02	0*	0*	1.22E+05	0*
Contribution to water pollution	m³	5.97E+04	1.52E+03	6.45E+00	0*	5.82E+04	2.64E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.29E-04	1.29E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	4.90E+02	3.06E+00	0*	0*	4.87E+02	0*
Total use of non-renewable primary energy resources	MJ	1.82E+04	1.22E+02	0*	0*	1.81E+04	0*
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.89E+02	2.00E+00	0*	0*	4.87E+02	0*
Use of renewable primary energy resources used as raw material	MJ	1.06E+00	1.06E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.82E+04	1.17E+02	0*	0*	1.81E+04	0*
Use of non renewable primary energy resources used as raw material	MJ	5.18E+00	5.18E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.12E+01	2.31E+00	0*	0*	3.82E+01	6.25E-01
Non hazardous waste disposed	kg	2.11E+02	4.22E+00	0*	0*	2.07E+02	0*
Radioactive waste disposed	kg	1.10E-02	2.02E-03	0*	0*	8.98E-03	4.11E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	9.10E-02	1.49E-02	0*	5.32E-02	0*	2.29E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	5.96E-02	0*	0*	0*	0*	5.96E-02
Exported Energy	MJ	1.69E-04	1.59E-05	0*	1.53E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number :</i>	SCHN-00567-V01.01-EN	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Verifier accreditation N°</i>	VH39	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Date of issue</i>	06/2020	<i>Information and reference documents</i>	www.pep-ecopassport.org
		<i>Validity period</i>	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
Internal	External	X	
<i>The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)</i>			
<i>PEP are compliant with XP C08-100-1 :2016</i>			
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			
			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

Published by Schneider Electric

SCHN-00567-V01.01-EN

© 2019 - Schneider Electric – All rights reserved

06/2020