

# PRODUCT DATASHEET

## HALOLINE 1500 W 240 V R7S

HALOLINE Standard | Double ended halogen lamps with tube base



---

### AREAS OF APPLICATION

- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Brilliant accent light
- No transformer required
- Contains no mercury

---

### PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index  $R_a$ : 100
- Color temperature: 3,000 K
- Burning position: p15

**TECHNICAL DATA**

Electrical data

Nominal wattage	1500.00 W
Nominal voltage	240 V
Rated wattage	1500.00 W
Power factor λ	1.00
Claimed equiv. conventional lamp power	1500 W

Photometrical data

Rated color temperature	2900 K
Light color (designation)	Warm White
Rated luminous flux	33000 lm
Color rendering index Ra	100
Lumen main.fact.at end of nom.life time	0.80
Color temperature	2900 K
Luminous flux	33000 lm
Color rendering index Ra	100
Nominal luminous flux	33000 lm

Light technical data

Starting time	0.0 s
Warm-up time (60 %)	0.00 s

Dimensions & weight



Diameter	12.0 mm
Overall length	250.7 mm
Length	256.1 mm
Outer bulb	T12
Maximum diameter	12.0 mm

## Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Number of switching cycles	50000

## Additional product data

Base (standard designation)	R7s
Mercury content	0.0 mg
Mercury-free	Yes
Product remark	Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

## Capabilities

Burning position	p15
Fuse, quick-acting	10.0 A
Dimmable	Yes


## Certificates &amp; standards

Energy efficiency class	C
Energy consumption	1500 kWh/1000h
Energy efficiency class	C

## Country-specific categorizations

ILCOS	HDG-1500-240-R7s-256,1
-------	------------------------

Light Distribution

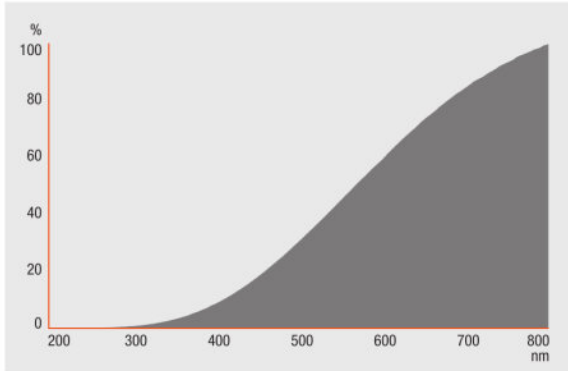

Spectral power distribution

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300209920	HALOLINE 1500 W 240 V R7S	Shipping carton box 12	315 mm x 84 mm x 117 mm	3.10 dm <sup>3</sup>	453.52 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.