


G9 TWIN SENSOR FLOODLIGHT- OUTDOOR/INDOOR

- Detection method is passive infrared,
- Detection coverage 180°.
- Adjustable Lux dusk to daylight and Time sensitivity.
- 2 x 100W G9 Halogen Lamps are included.
- Manual over-ride.

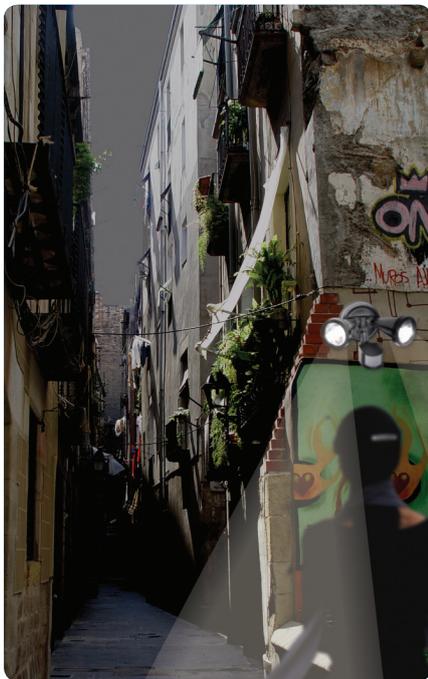

100W G9 Halogen Lamp

MATERIALS/FINISH

Housing Painted Cast Alloy.



P.I.R Sensor Polycarbonate / ABS blend.

INSTALLATION/MOUNTING


Mounting Wall or ceiling mount.

TECHNICAL

Designed to comply with	AS/NZS 60598
Class rating	Ⓛ Class 1 electrical
IP	33
Voltage	230-240Vac~50Hz
Max. Wattage	2 x 100W
Body Colour	Black, White or Silver
Detection Angle	180°
Detection Range	12m
Time	10sec - 4min

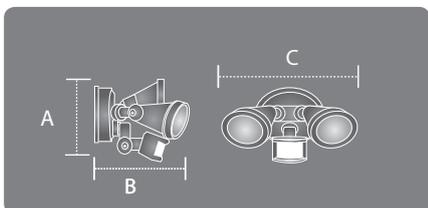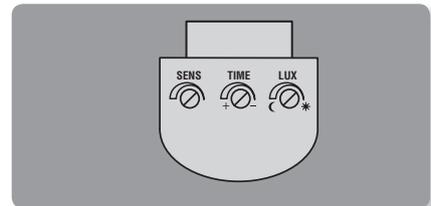

A = HEIGHT, B = OVERALL DEPTH, C = WIDTH

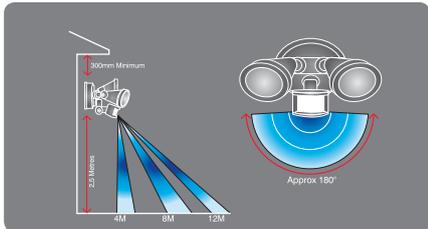

NOTE: All specifications correct at time of printing.
Specifications are subject to change without notice.

DIMENSIONS		
A	B	C
200	170	275

SPECIFICATION GUIDE		
Product	Product Description	Lamp Wattage
MPES69G9	*Twin "Black" G9 Sensor.	200W
MPES69G9W	*Twin "White" G9 Sensor.	200W
MPES69G9SI	*Twin "Silver" G9 Sensor.	200W

*100W G9 Halogen lamps are supplied.