




CE

Kyoritsu 2002PA Analogue/Digital Clamp Meter

Features at a glance

- Can measure large AC current up to 2000A.
- Peak hold function.
- 55mm-dia large tear drop shaped jaws.
- Minimum resolution 0.1A

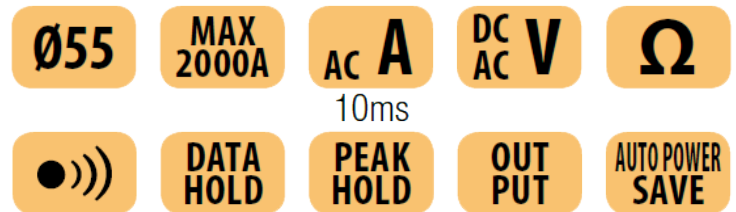

Specifications

AC V	400A(0 - 400A) ±1%rdg±3dgt[50/60Hz] ±2%rdg±3dgt[40Hz - 1kHz] 2000A(0 - 1500A) ±1%rdg±3dgt[50/60Hz] ±3%rdg±3dgt[40Hz - 1kHz] 2000A(1500 - 2000A) ±3.0%rdg[50/60Hz]
AC V	40/400/750V ±1%rdg±2dgt[50/60Hz] ±1.5%rdg±3dgt[40Hz - 1kHz]
DC V	40/400/1000V ±1%rdg±2dgt
Continuity buzzer	buzzer sounds below 50±35Ω
Ω	400Ω/4k/40k/400kΩ ±1.5%rdg±2dgt
Conductor size	φ 55mm max
Frequency response	40Hz - 1kHz
Output	Recorder:DC400mV against AC400A DC200mV against AC2000A
Applicable Standards	IEC 61010-1 CAT III 600V, CAT II 1000V IEC 61010-031 IEC 61010-2-032 IEC 61326-1
Power source	R6(AA)(1.5V) × 2 *Continuous measuring time : approx. 150 hours
Dimensions	247(L) × 105(W) × 49(D)mm
Weight	470g approx.
Accessories	7107A(Test leads), 9094(Carrying case) R6(AA) × 2, Instruction manual
Optional	7256(Output cord)