



Ausrack Patch 19" Lab Rack

Index

[Dimension Sheet](#)

[Catalogue Information](#)

[Leaflet](#)


Web Links

[Ausrack Patch Information Page](#)


[Ask a question / Send us an enquiry](#)

[Information about B&R](#)


[Local Sales Team Phone Numbers](#)

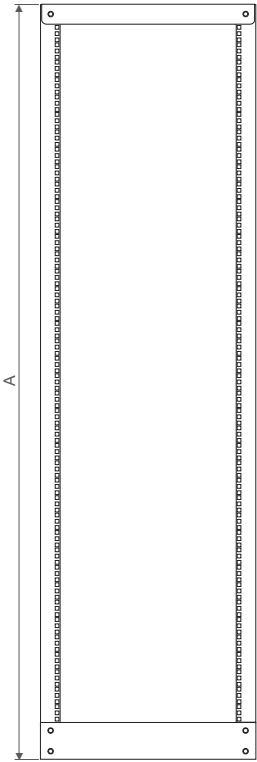

Front View

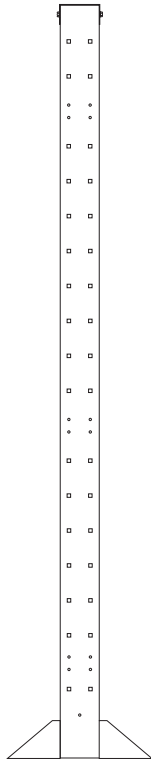

Side View

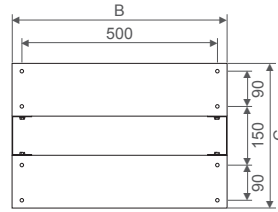

Base View

Dimensions (mm)

External

Catalogue No.	A	B	C
AL40U	1930	550	375
AL45U	2155	550	375



Ausrack Patch

19" Lab Rack

brenclosures.com.au/al.htm



Features

- RU marked rails for easy placement of equipment
- Load bearing capacity of 150 kg
- Supplied in flat pack form for easy delivery
- Easy assembly with only 12 bolts
- Specifications
 - EIA 310-D
 - IEC 60297
- Materials
 - Body – zinc coated steel
 - Frame thickness – 1.6mm
- Surface finish – powdercoat textured matt black



The Ausrack Patch is designed to provide a functional and cost effective solution for network patching applications where accessibility is a major requirement. The open construction particularly suits those wanting full access to equipment at all times. Ausrack Patch system is supplied flat packed and is easy to assemble.

Inclusions



- RU marked frame

Selection Guide


Catalogue No.	Height (RU)	Dimensions (mm)			Load Rating (kg)	Weight (kg)
		Height	Width	Depth		
AL40U	40	1930	550	375	150	16.5
AL45U	45	2155	550	375	150	17.0

Accessories

Product	Description	Catalogue No.	Optional End Cover	AL40U	AL45U
Cable management	Vertical system	AL40UC	ALC40UE	•	•
		AL45UC	ALC45UE	•	•
	Rings	ALCMR	–	•	•
	Horizontal, 1 RU	ARPCM1U	–	•	•
	Horizontal, 2 RU	ARPCM2U	–	•	•
Shelves – cantilever (black)	2 RU x 210mm deep	ARC210	–	•	•
	2 RU x 360mm deep	ARC360	–	•	•
Power rails – horizontal (10A outlets only) SAA	6 x 10A outlets, 10A plug	ARPRH61010	–	•	•
	6 x 10A outlets, 15A plug	ARPRH61015	–	•	•
	10 x 10A outlets, 10A plug	ARPRH101010	–	•	•
	10 x 10A outlets, 15A plug	ARPRH101015	–	•	•
Cage nuts	50 pack	ARCN	–	•	•



19" Lab Rack

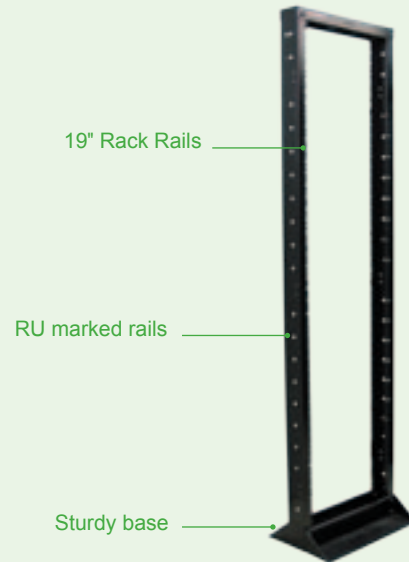

OVERVIEW

The Ausrack Patch is a two post frame designed to provide a functional and cost effective solution where accessibility is a major requirement.

The open construction particularly suits those wanting full access to equipment at all times. Ausrack Patch is supplied flat packed and is easy-to-assemble.

APPLICATION

Typically used for network patching applications where accessibility is a requirement.

MATERIALS

Body: Zinc Coated Steel
Body thickness: 1.6mm
Surface finish: Powdercoat textured matt black

FEATURES

- EIA-310-D standards compliant
- Load rating of 150kg
- RU marked rails for easy placement of equipment
- Sturdy base suitable for bolting to floor
- Quick and easy-to-assemble
- Supplied flatpacked for delivery to site
- Available in 40RU and 45RU configurations

Catalogue No.	Height (RU)	Dimensions (mm)			Load Rating (kg)	Weight (kg)
		Height	Width	Depth		
AL40U	40	1930	550	375	150	16.5
AL45U	45	2155	550	375	150	17.0

Accessories

Product	Description	Catalogue No.	Optional End Cover
Cable management	Vertical System	AL40UC AL45UC	ALC40UE ALC45UE
	Rings	ALCMR	–
	Horizontal, 1RU	ARPCMH1U	–
	Fingers, 1RU	ARPCMF1U	–
	Fingers, 2RU	ARPCMF2U	–
	Fingers, 4RU	ARPCMF4U	–
Shelves – cantilever (black)	2RU x 210mm deep	ARC210	–
	2RU x 360mm deep	ARC360	–
Power rails – horizontal (10A outlets only) SAA	6 x 10A outlets, 10A plug	ARPRH61010	–
	6 x 10A outlets, 15A plug	ARPRH61015	–
	10 x 10A outlets, 10A plug	ARPRH101010	–
	10 x 10A outlets, 15A plug	ARPRH101015	–
Cage nuts	50 pack	ARCN	–



INCLUSIONS

- RU marked frame



Other brands in the B&R Group:



Queensland P: +61 7 3714 1000
Townsville P: +61 7 4775 6255
Sydney P: +61 2 8867 7688
Newcastle P: +61 2 4961 4433
Victoria P: +61 3 8588 8400

South Australia P: +61 8 8417 6200
Western Australia P: +61 8 9248 9744
Tasmania P: +61 3 6331 5545
Northern Territory P: +61 8 8947 0870

Email sales@brenclosures.com.au
 Web www.brenclosures.com.au