


Quick Overview

Floatless Level Controller

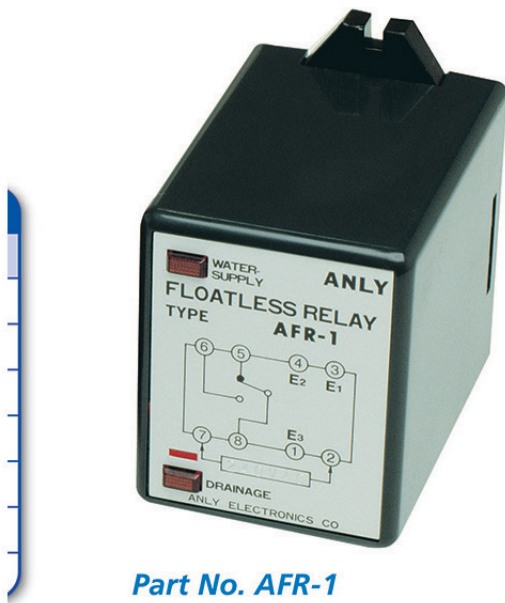

Features

Timers

Floatless Level Controller AFR-1

- For use where float switches are impractical
- Suitable for filling and emptying
- Uses 8 volts AC through probes
- APS-3 probe holder available

Specifications:

- Rated voltage: 240V AC
- Operating voltage: 8V AC
- Operating resistance: 4K
- Response time: 80 milli-seconds max
- Contact rating: 5 amps resistive
- Mounting base PF083A-E sold separately
- Dimensions: 61mm x 49mm x 70mm

Details

Part No.	AFR-1
Brand	Anly
Unit Of Measure	Each

Proudly Distributed By



1300 555 586
www.repelec.com.au

Sign up or log in to repelec.com.au
 Facebook Instagram X YouTube @RepelecAU

Carton Quantity	1
Compendium Page #	608

