

5.1 BOOTLACE TERMINALS


5.1.1 PRE-INSULATED BOOTLACE TERMINALS

Features

- Pre-insulated bootlace terminals
- Provide precise terminations to multi-stranded cable
- Reduces possibility of short-circuiting and ensures no strands stray
- Colour-coded for easy identification
- 600V max

Temperature Rating

+105°C

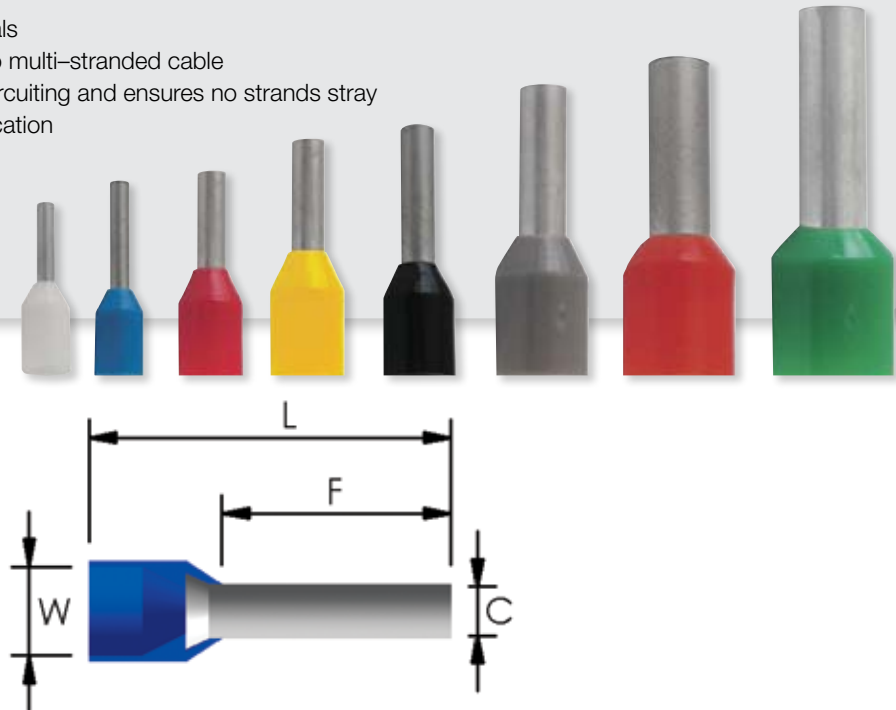

5

PRE-INSULATED & NON-INSULATED TERMINALS

Specifications																		
Part No	Conductor size (mm ²)	Dimensions (mm)				Pack Qty	Colour	Suitable Crimping Tool										
		L	F	C	W			WATK007	WAT60000	WATK1-K38ERGO	WATBLC-DL6	WATBLC-DL10	WATBLC-DL16	WATKSBLC	WATKSBLC616	WATBLC-TC6	WATBLC-TC8	
ALCBLV/100	0.25	10.0	6.0	0.75	1.9	100	Violet			•	•						•	
ALCBLP/100	0.34	10.0	6.0	0.8	1.9	100	Pink			•	•						•	
ALCBLW/100	0.5	12.0	6.0	1.3	3.3	100	White	•	•	•	•				•		•	•
ALCBLB/100	0.75	14.8	8.0	1.5	3.5	100	Blue	•	•	•	•	•			•		•	•
ALCBLR/100	1.0	12.6	6.0	1.7	3.7	100	Red	•	•	•	•	•			•		•	•
ALCBLY/100	1.0	14.5	6.0	1.7	3.7	100	Yellow	•	•	•	•	•			•		•	•
ALCBLBK/100	1.5	14.5	8.0	2.0	4.0	100	Black	•	•	•	•	•			•		•	•
ALCBLY/100	2.5	15.8	8.0	2.6	4.9	100	Grey	•	•	•	•	•			•		•	•
ALCBLO/100	4.0	16.5	9.0	3.2	5.5	100	Orange	•		•	•	•	•	•	•			•
ALCBLG/50	6.0	20.5	12.0	3.9	7.0	50	Green	•		•	•	•	•	•		•		•
ALCBLG-18/50	6.0	26.0	18.0	3.5	6.3	50	Green	•		•	•	•	•	•		•		•
ALCBLR/50	10.0	22.0	12.0	4.5	7.6	25	Brown	•				•	•			•		•
ALCBLR-18/50	10.0	28.0	18.0	4.5	7.6	25	Brown	•				•	•			•		•
ALCBLI/50	16.0	24.0	12.0	5.8	8.8	25	Ivory								•		•	•
ALCBLI-18/50	16.0	28.0	18.0	5.8	8.8	25	Ivory								•		•	•
ALCBLBK25/25	25.0	30.0	16.0	8.3	12.7	10	Black											
ALCBLR35/20	35.0	30.0	16.0	8.3	12.7	20	Red											
ALCBLB50/10	50.0	36.0	20.0	10.3	15.0	10	Blue											
ALCBLY70/9	70.0	37.0	21.0	13.5	16.0	9	Yellow											
ALCBLR95/5	95.0	44.0	25.0	14.7	18.0	5	Red											
ALCBLB120/4	120.0	48.0	27.0	16.7	20.0	4	Blue											
ALCBLY150/3	150.0	58.0	32.0	19.5	23.0	3	Yellow											