
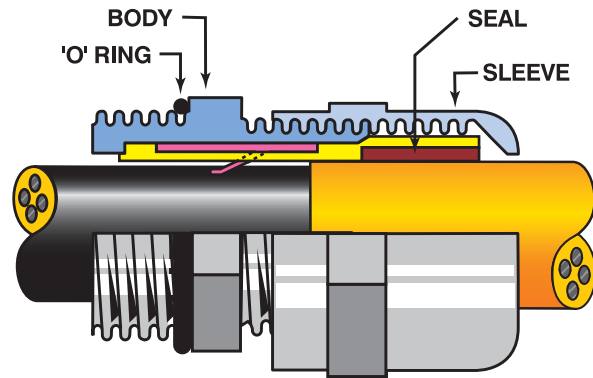


Alco

General Purpose Stainless Steel Glands for Unarmoured Cable

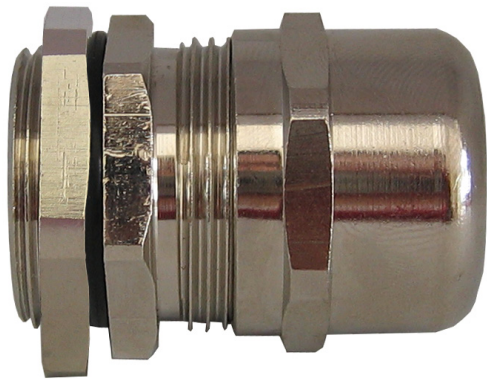

Applications	For indoor or outdoor use
Function	Provides seal on cable sheath
Approvals	IP68 (m)
Range	ALCBRGM16-SS-ALCBRGM63-SS
Material	Stainless Steel (316)
Locknut	Supplied as standard
Seal	Neoprene
O Ring	NBR
Temperature Range	-40°C to +100°C

SPECIFICATIONS:

PART NUMBER	CABLE SEALING RANGE (MM)		THREAD DIAMETER x LENGTH	DIAMETER ACROSS FLATS	ORANGE SHROUD*		BOX QTY
	MIN	MAX			PVC	SILICON	
ALCBRGM16-SS	4.0	8.0	M16 x 12	19	-	ALCSG0S	15
ALCBRGM20-SS	6.0	12.0	M20 x 12	22	ALCSG1	ALCSG1S	10
ALCBRGM25-SS	10.0	14.0	M25 x 12	27	ALCSG2	ALCSG2S	10
ALCBRGM32-SS	13.0	18.0	M32 x 15	36	ALCSG3	ALCSG3S	5
ALCBRGM40-SS	18.0	25.0	M40 x 15	46	-	ALCSG3L	4
ALCBRGM50-SS	22.0	32.0	M50 x 15	55	ALCSG5	ALCSG5S	2
ALCBRGM63-SS	34.0	44.0	M63 x 18	70	ALCSG6	ALCSG6S	1

* For Black Shroud add 'B' to part number: e.g. ALCSG3SB. Note: Mounting thread pitch 1.5mm, unless otherwise specified. See website for fitting instructions. # All dimensions in mm unless otherwise specified.

Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au