


## CU LONG PALM LONG BARREL HD

- Made from high conductivity annealed Copper and tinned
- Crimped with CABAC and MSS Power recommended standard dies
- Suitable for most hazardous and severe fault current applications
- Heavy Duty lug with sealed palm and palm junction
- Complies with AS4325.1

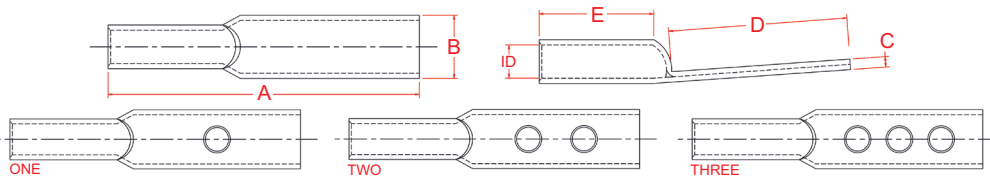

Part No.	ID Size (mm)	Nominal Conductor (mm <sup>2</sup> )	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Crimp Die	A/F Hex Die (mm)	Unit	Qty
<b>CAL25LPBHD</b>	7.1	25	95	16	4.1	61	29	HT130-C-35	9.2	EA	1
<b>CAL35LPBHD</b>	8.2	35	112	18	4.6	72	35	HT130-C-50	10.4	EA	1
<b>CAL50LPBHD</b>	9.5	50	130	18	5.2	80	44	HT130-C-70	11.5	EA	1
<b>CAL70LPBHD</b>	11.2	70	154	21	6.2	100	48	HT130-C-95	14.2	EA	1
<b>CAL95LPBHD</b>	13.4	95	161	28	6.8	100	54	HT130-C-120	16.5	EA	1
<b>CAL120LPBHD</b>	15.6	120	168	28	6.9	100	60	HT130-C-150	18.3	EA	1
<b>CAL150LPBHD</b>	16.7	150	169	32	7.5	100	60	HT130-C-185	20	EA	1
<b>CAL185LPBHD</b>	18.4	185	174	35	10.2	100	64	HT130-C-240	23.1	EA	1

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.