


COPPER DOUBLE GRIP LUGS

CU DOUBLE GRIP



- Made from high conductivity 99.9% pure annealed Copper
- Crimped with CABAC and MSS Power standard recommended dies
- Suitable for high vibration applications
- Flared barrel crimped onto conductor insulation
- Complies with AS4325.1

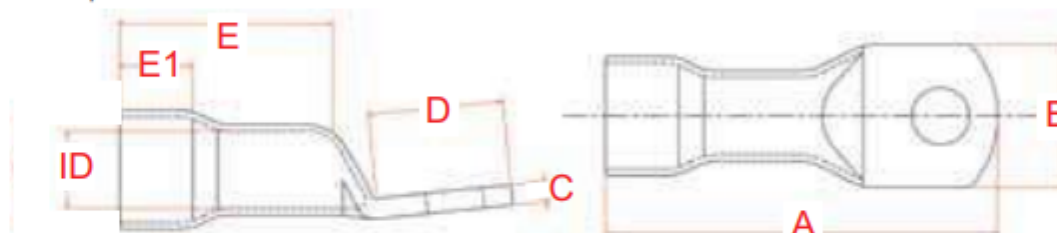

Part No.	Nominal Conductor (mm ²)	ID Barrel	ID Flare	Stud Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	E1 (mm)	A/F Hex Die (mm)	No. Crimps	A/F Die on Flare	Unit	Qty
CAL35-12DG	35	8.2	13.9	12	60	20	2.2	22.5	29.2	10.5	9.2	1	11.5/70Cu	EA	1
CAL50-12DG	50	9.5	15.3	12	64	21	2.7	23	32	11.5	10.4	1	14.2/95Cu	EA	1
CAL70-12DG	70	11.2	16	12	67	21	3.2	26	34	13.5	11.5	1	16.5/120Cu	EA	1
CAL95-12DG	95	13.4	18.9	12	76	25	3.9	28	38	13.5	14.2	1	18.3/150Cu	EA	1
CAL120-12DG	120	15.6	23.3	12	83	29	5	26.5	44	14	16.5	1	20.0/185Cu	EA	1
CAL150-12DG	150	16.7	24.95	12	97	32	5.5	42.5	44	15.5	18.3	1	23.1/240Cu	EA	1
CAL185-12DG	185	18.4	28.9	12	105	35	5.7	39	49	22.5	20	1	26.0/300Cu	EA	1
CAL240-12DG	240	21.2	32.9	12	116	40	7.1	41.7	57	22.5	23.1	2	28.1/400Cu	EA	1
CAL300-12DG	300	23.5	34.7	12	126	45	7.8	46.5	62	24	26	2	31.0/500Cu	EA	1