





MCB Enclosures



Part no.	Description
DA-L1	1 Pole MCB enclosure
DA-L2	2 Pole MCB enclosure
DA-L4	4 Pole MCB enclosure
DA-L6	6 Pole MCB enclosure
DA-L8	8 Pole MCB enclosure
DA-L12	12 Pole MCB enclosure
DA-L18	18 Pole MCB enclosure

MCB Enclosure unit dimensions

	A	B	C
DA-L1	130	60	34
DA-L2	130	60	52
DA-L4	130	62	87
DA-L6	160	65	123
DA-L8	160	65	160
DA-L12	160	62	260
DA-L18	160	62	365

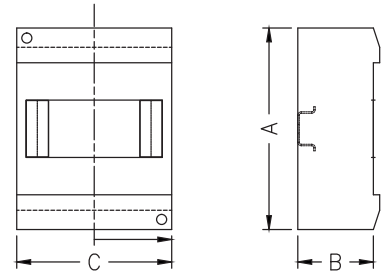

Eureka Metal Load Centres

Metal type with screw on escutcheon c/w Earth and Neutral bar arrangements
IP40. From 16 to 96 pole. Ideal for DIN mount relays or similar products
Custom made load centres available. Each row holds a maximum of 16 x 1 pole mcb's



Part no.	Height	Width	Depth	No. of rows
CM116	320	440	120	1
CM232	470	440	120	2
CM348	630	440	120	3
CM464	790	440	120	4
CM580	950	440	120	5
CM696	1110	440	120	6
CM-LOCK	Replacement push lock for CM load centres			
CM-KLOCK	Replacement key lock for CM load centres			

Weatherproof Plastic Load Centres IP55

4, 8, 12, 18 and 24 pole. 1 Unprotected and 2 protected neutral bars.
Flame retardant and UV protected. Surface mount, IP55 weatherproof.
Transparent cover, top, bottom and rear entry



Part no.	Description
EUR 4ST-W IP55	4 Pole IP55 Weatherproof s/mount transparent MCB load centre
EUR 6ST-W IP55	6 Pole IP55 Weatherproof s/mount transparent MCB load centre
EUR 8ST-W IP55	8 Pole IP55 Weatherproof s/mount transparent MCB load centre
EUR 12ST-W IP55	12 Pole IP55 Weatherproof s/mount transparent MCB load centre
EUR 18ST-W IP55	18 Pole IP55 Weatherproof s/mount transparent MCB load centre
EUR 24ST-W IP55	24 Pole IP55 Weatherproof s/mount transparent MCB load centre

Weatherproof unit dimensions

	A	B	C
EUR-4ST-W IP55	215	100	126
EUR-6ST-W IP55	215	100	163
EUR-8ST-W IP55	215	100	217
EUR-12ST-W IP55	215	100	272
EUR-18ST-W IP55	235	100	380
EUR-24ST-W IP55	340	100	285

