BURNDY

**Material Specification** - Thickness 2.5 mm (mild steel)


2.0 mm (stainless Steel)


- Length 6 metres

**Ordering Details** 

- Supplied in standard 6 metre lengths.

Available Finish	Ordering Code
Black (untreated)	B1000B
Galvabond	B1000G
Hot Dip Galvanised	B1000H
Stainless Steel	B1000S





B1000 Channel 15.7 kg per length


**Material Specification** 


Thickness 1.6 mmLength 6 metres

**Ordering Details** 

- Supplied in standard 6 metre lengths.

Available Finish	Ordering Code	
Galvabond	B2000G	
Hot Dip Galvanised	B2000H	





**B2000 Channel** 

10.8 kg per length




**Material Specification** - Thickness 2.5 mm (mild steel)

2.0 mm (stainless Steel)

- Length 6 metres

**Ordering Details** - Supplied in standard 6 metre lengths.

Available Finish	Ordering Code
Black (untreated)	B3300B
Galvabond	B3300G
Hot Dip Galvanised	B3300H
Stainless Steel	B3300S





**B3300 Channel** 


10.9 kg per length

**Material Specification** - Thickness 1.6 mm

- Length 6 metres

**Ordering Details** - Supplied in standard 6 metre lengths.

Available Finish	Ordering Code
Galvabond	B4000G
Hot Dip Galvanised	B4000H





**B4000 Channel** 

7.6 kg per length

BURNDY

**Material Specification** 


- Thickness 2.5 mm (mild steel).


- Length 6 metres

**Ordering Details** 

- Supplied in standard 6 metre lengths.

Ordering Code	
B5500G	
B5500H	





**B5500 Channel** 


20.4 kg per length



2.5 mm (mild steel) **Material Specification** - Thickness

> - Length 6 metres

**Ordering Details** 

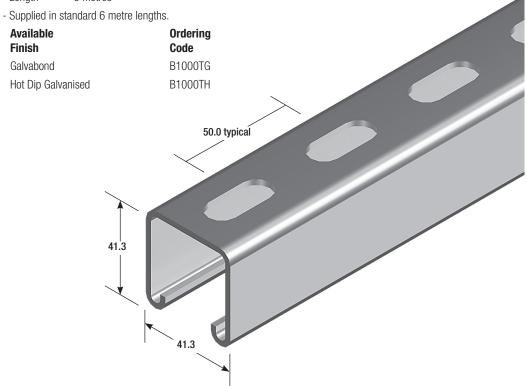

**B1000T Slotted Channel** 

13.9 kg per length

**Material Specification** 

- Thickness 1.6 mm - Length 6 metres

**Ordering Details** 

Supplied in standard 6 metro	e lengths.	
Available Finish	Ordering Code	
Galvabond	B2000TG	
Hot Dip Galvanised	B2000TH	
	50.0 typical	
41. <del>.</del>   		
	41.3	

**B2000T Slotted Channel** 


10.5 kg per length

**Material Specification** - Thickness 2.5 mm

- Length 6 metres

**Ordering Details** 

- Supplied in standard 6 metre lengths.

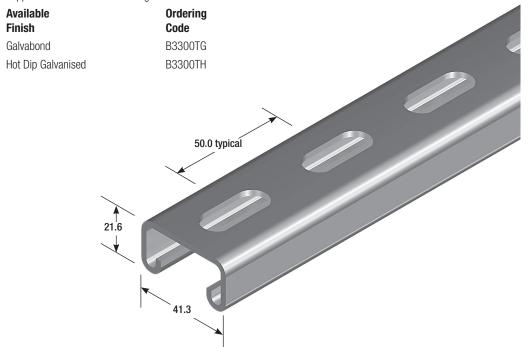

**B3300T Slotted Channel** 

9.3 kg per length

**Material Specification** 

Thickness 1.6 mmLength 6 metres

**Ordering Details** 

- Supplied in standard 6 metre lengths.

- Supplied in Standard 6		
Available Finish	Ordering Code	
Galvabond	B4000SG	
Hot Dip Galvanised	B4000SH	
	50.0 typical 21.6 41.3	

**B4000T Slotted Channel** 

7.3 kg per length



**Material Specification** - Thickness 2.5 mm 6 metres - Length **Ordering Details** - Supplied in standard 6 metre lengths. Available Ordering **Finish** Code Galvabond B5500SG Hot Dip Galvanised B5500SH 50.0 typical 61.9 41.3

**BURNDY** 

**Material Specification** 

**Ordering Details** 

- Thickness see below

- Length

- Supplied in standard 6 metre lengths.

6 metres


**Available** 


**Finish** Code Galvabond G Hot Dip Galvanised Н


Note

- All products are manufactured against firm orders only. They are non returnable and the order cannot be cancelled once manufacture has commenced.









B1001

2.5 mm material

1.6 mm material

2.5 mm material

Wt 31.4 kg/length

B3301

Wt 21.8 kg/length

B5501

Wt 40.8 kg/length

