



Base For 6012 Relay/9901 Led Modules w/Metal Clip

- Complete range from PCB to power relays to cover all of your switching requirements
- International certifications and approvals including CE, CSA, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product
- Compact construction allowing for most efficient use of your space


Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS	
Product Series	60
Component Type	Timers and Control relays
Component Type	Relay Base
Electrical Service Life at Un, In	200000 cycles
Total Making Time	11 ms
Total Breaking Time	4 ms
Insulation Voltage, between Coil & Contacts	4000 V
Dielectric Strength, between open Contacts	1000 V AC
Mounting	Plug-in
Operating Temperature, Min	-40 °C min
Operating Temperature, Max	70 °C max
Height	67 mm
Width	38 mm
Depth	22.5 mm
Shock Acceleration (Max.)	20 g
Shock Duration (Max.)	4 ms
Vibration Acceleration (Max.)	22 m/s ²
Vibration Frequency, Operational (Max.)	55 Hz
Certifications	CE CCC CSA EAC GOST-R IMQ VDE C-UR-US
Shipping Approvals	Lloyd's Register of Shipping RINA (Registro Italiano Navale)

Catalogue No: **90.20**

BASE FOR 6012 RELAY/9901 LED MODULES W/METAL CLIP

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays

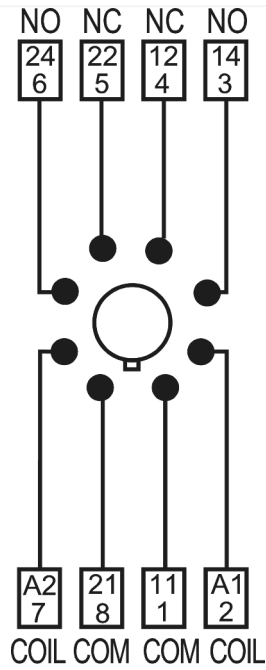

90.20

Connection / Wiring Diagram