

Jumper Link for 9402/9404 Bases, 6 Way

- Lockable test button and mechanical flag indicator as standard on 2 and 4 pole types
- AC coils and DC coils
- Cadmium Free contacts (preferred version)
- 94 series sockets
- Coil EMC suppression
- Timer accessories 86 series



Representative Photo Only  
(actual product may vary based on configuration selections)

**SPECIFICATIONS**

Product Series	55
Component Type Timers and Control relays	Jumper
Dielectric Strength, between open Contacts	1000 V AC
Mounting	Plug-in
Shock Acceleration (Max.)	16 g
Shock Duration (Max.)	3 ms
Vibration Acceleration (Max.)	15 m/s <sup>2</sup>
Vibration Frequency, Operational (Max.)	55 Hz


**REFERENCES**

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **09406**

**JUMPER LINK FOR 9402/9404 BASES 6 WAY**

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 55 Series Mini General Purpose Relays

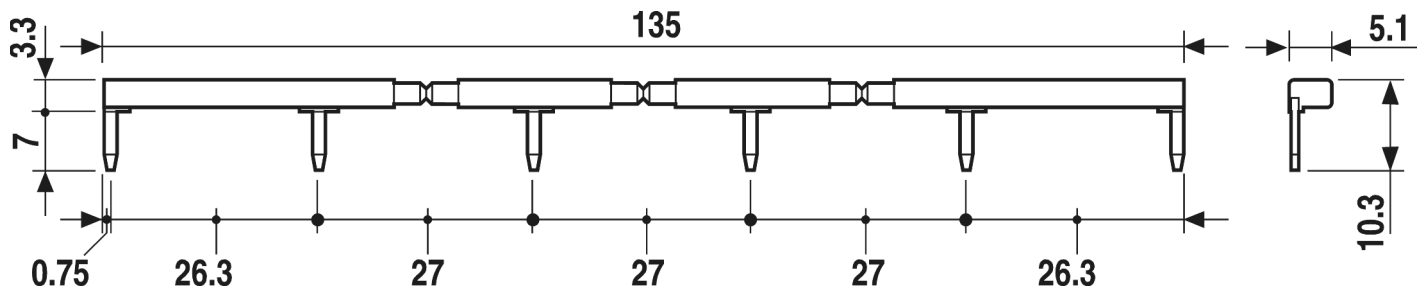

Dimension Diagram