


Jumper Link For 9575/9585 Bases 8 Way

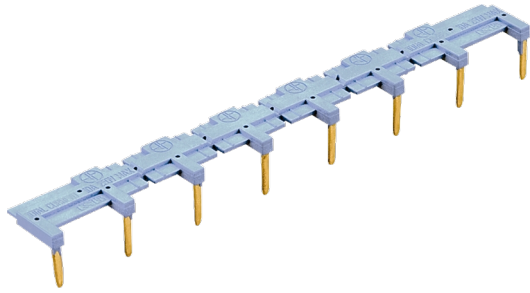

- Complete range from PCB to power relays to cover all of your switching requirements
- Certifications and approvals including CE, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product.
- Compact construction allowing for most efficient use of space

Representative Photo Only  
(actual product may vary based on configuration selections)

**SPECIFICATIONS**

Component Type Timers and Control relays	Jumper
Dielectric Strength, between open Contacts	1000 V AC
Mounting	PCB Mount
Shock Acceleration (Max.)	20 g
Shock Duration (Max.)	5 ms
Vibration Acceleration (Max.)	25 m/s <sup>2</sup>


**REFERENCES**

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **95.08**

**JUMPER LINK FOR 9575/9585 BASES 8 WAY**

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > PCB and Miniature Relays > 40/44 Series Miniature PCB Relays

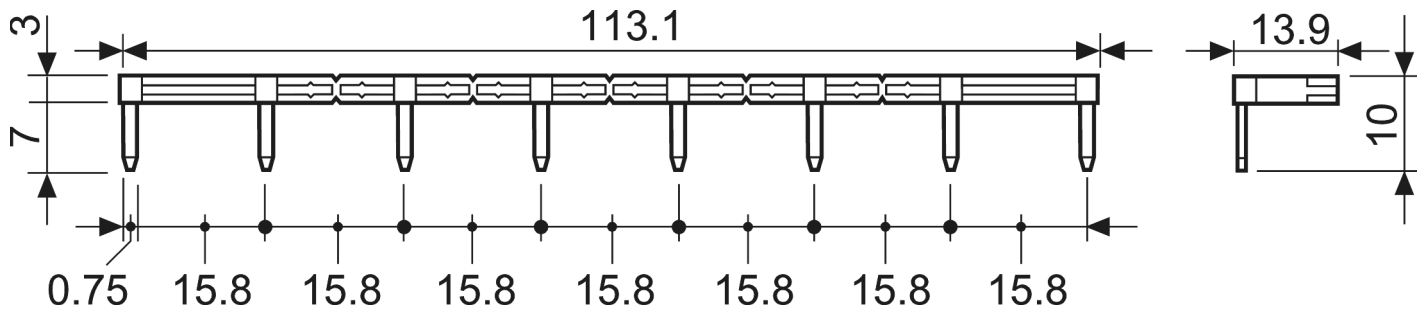

Dimension Diagram