


Base For 40/44 Relays w/Metal Clip

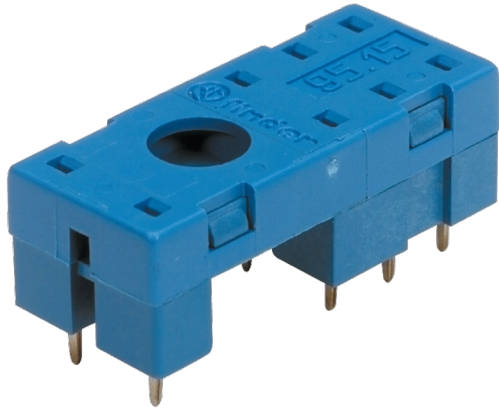

- Complete range from PCB to power relays to cover all of your switching requirements
- International certifications and approvals including CE, CSA, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product
- Compact construction allowing for most efficient use of your space

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type	Timers and Control relays	Relay Base
Dielectric Strength, between open Contacts		1000 V AC
Mounting		PCB Mount
Shock Acceleration (Max.)		20 g
Shock Duration (Max.)		5 ms
Vibration Acceleration (Max.)		25 m/s ²


REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-




Catalogue No: **95.15**

BASE FOR 40/44 RELAYS W/METAL CLIP

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > PCB and Miniature Relays > 40/44 Series Miniature PCB Relays

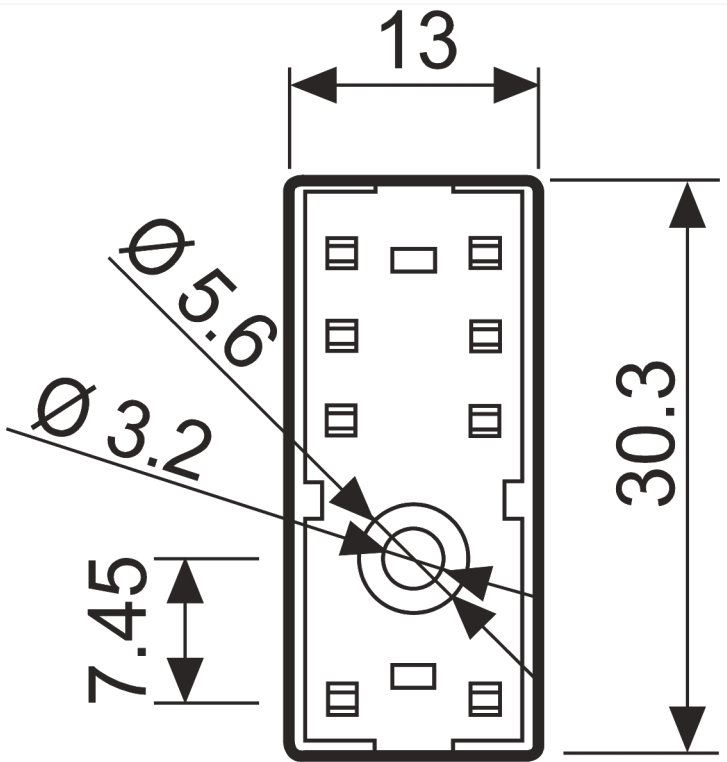

Dimension Diagram

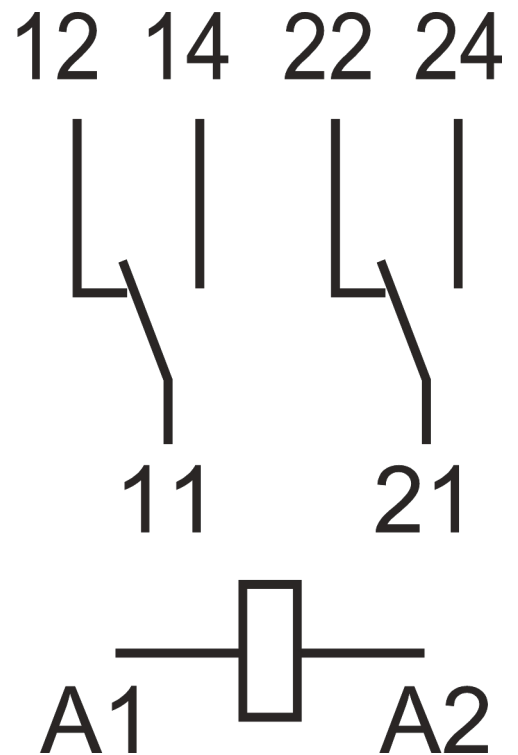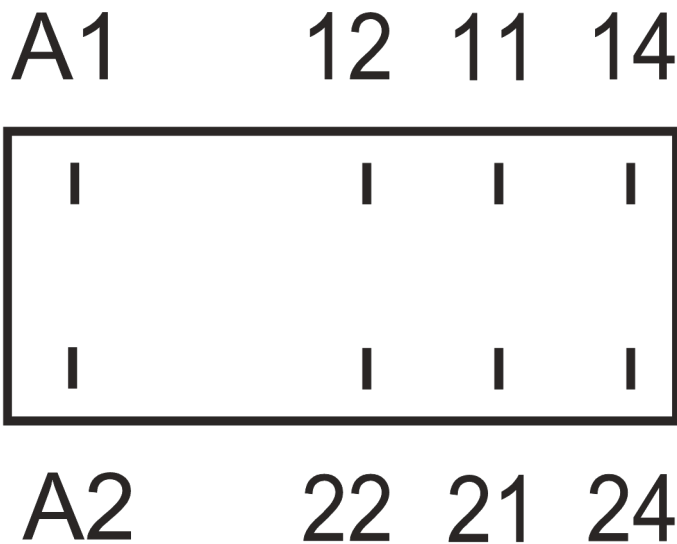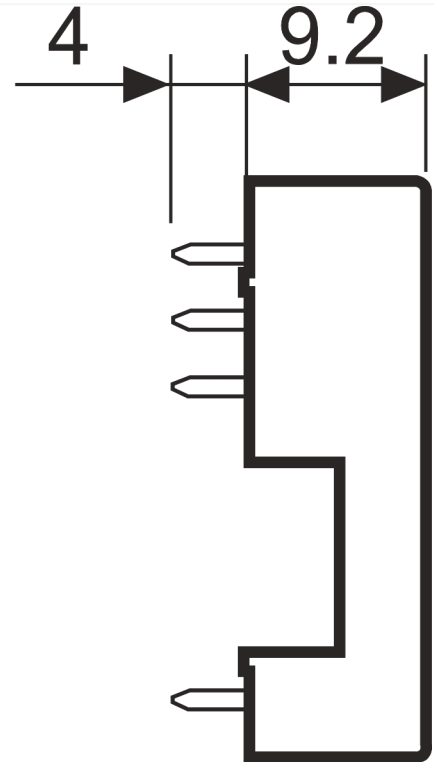

Connection / Wiring Diagram