


Socket For 40/44 Relay + Led Module

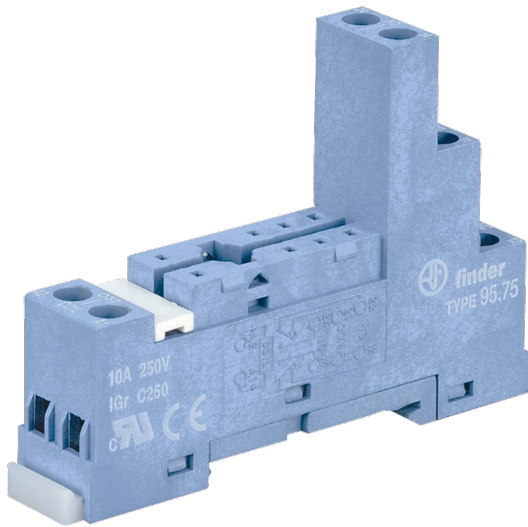

- Complete range from PCB to power relays to cover all of your switching requirements
- International certifications and approvals including CE, CSA, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product
- Compact construction allowing for most efficient use of your space

Representative Photo Only  
(actual product may vary based on configuration selections)

**SPECIFICATIONS**

|  |                           |                     |
|--|---------------------------|---------------------|
| Component Type                             | Timers and Control relays | Relay Base          |
| Dielectric Strength, between open Contacts |                           | 1000 V AC           |
| Mounting                                   |                           | PCB Mount           |
| Shock Acceleration (Max.)                  |                           | 20 g                |
| Shock Duration (Max.)                      |                           | 5 ms                |
| Vibration Acceleration (Max.)              |                           | 25 m/s <sup>2</sup> |

**REFERENCES**

|   |   |
|---|---|
| IECEX Certificate                           | - |
| Supplier Declaration of Conformity:         | - |
| Installation Guide:                         | - |
| User Manual:                                | - |
| Manufacturer Datasheet:                     | - |
| Manufacturer Catalogue & Product Selection: | - |