


# CA7910240VACU

S&S CA7 Contactor 4kW 3Pole 240VAC Coil 1NO Contact  
Auxiliary

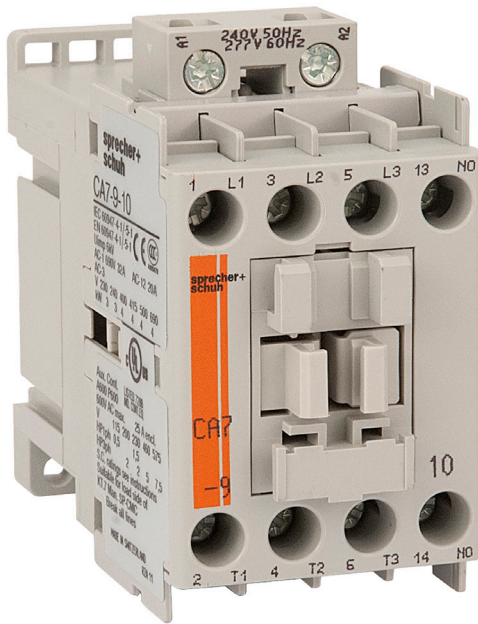

<b>Component type</b>	Power contactor, AC switching
<b>Range</b>	CA7
<b>Model</b>	N/A
<b>Product status</b>	Existing

The Sprecher + Schuh CA7 contactors are the ideal solution for reliable and durable electrical components. It is a modern and flexible IEC power contactor for DOL starting needs with up to 100A AC3 and wide range selection covering from 4kW up to 63kW (400V).

## ELECTRICAL

Number of normally open contacts as main contact	3.0
Number of normally closed contacts as main contact	0.0
Rated operation current $I_e$ at AC-3, 400 V	9.0 A
Rated operation power at AC-3, 400 V	4.0 kW
Rated operation current $I_e$ at AC-1, 400 V	32.0 A
Max. rated operation voltage $U_e$ AC	690.0 V
Voltage type for actuating	AC
Control supply voltage $U_s$ at AC 50HZ	240.0 V
Number of auxiliary contacts as normally open contact	1.0
Number of auxiliary contacts as normally closed contact	0.0
Rated operation current $I_e$ at AC-3, 690 V	5.0 A
Rated operation power at AC-3, 690 V	4.0 kW
Rated operation power at AC-4, 400 V	1.8 kW
Control supply voltage $U_s$ at AC 60HZ	277.0 V
Power consumption, AC coil pickup	75.0 VA
Power consumption, AC coil hold-in	9.5 VA
Type of electrical connection of main circuit	Screw connection
Rated operation current $I_e$ at AC-4, 400 V	4.3 A

## CONSTRUCTION

Degree of protection (IP)	IP20
Mounting method	Screw mounting

## DIMENSIONS

Height	81.0 mm
Width	45.0 mm
Depth	86.5 mm
Weight	0.39 kg

# CA7910240VACU

S&S CA7 Contactor 4kW 3Pole 240VAC Coil 1NO Contact  
Auxiliary

## DIMENSIONAL DIAGRAM

