

Miniature circuit breakers


Din-T10 series 10 kA MCB

- Standard AS/NZS 4898 ¹⁾
- Approval No. N17481
- Short circuit breaking capacity - 10000 Amps
- Current range 0.5 - 63 Amps 1, 2, 3 and 4 pole
- Sealable and lockable handle
- Modular design
- Available in curve type B, C and D
- Mounts on CD chassis (250 A and 355 A)

















DTCB10
1 pole

1 pole 1 module

In (A)	B – Curve 3-5 I _n
0.5	DTCB10105B
1	DTCB10101B
2	DTCB10102B
3	-
4	DTCB10104B
6	DTCB10106B
10	DTCB10110B
13	 DTCB10113B
16	DTCB10116B
20	DTCB10120B
25	DTCB10125B
32	DTCB10132B
40	DTCB10140B
50	DTCB10150B
63	DTCB10163B

2 pole 2 modules

0.5	 DTCB10205B
1	 DTCB10201B
2	 DTCB10202B
4	 DTCB10204B
6	 DTCB10206B
10	 DTCB10210B
13	 DTCB10213B
16	 DTCB10216B
20	 DTCB10220B
25	 DTCB10225B
32	 DTCB10232B
40	 DTCB10240B
50	 DTCB10250B
63	 DTCB10263B

Short circuit capacity 10 kA

In (A)	0.5 - 63
1 P	240 V AC
2 P	240/415 V AC
3 P	240/415 V AC
4 P	240/415 V AC


Use at DC

	1 P	2 P ²⁾
Short circuit	25 kA	30 kA
Max voltage	48 V DC	110 V DC

Notes: ¹⁾ A range of UL standard MCBs is available on indent. (ref DTCBUL10___C).

²⁾ 2 pole MCB connected in series.

The line side is the "OFF" (bottom) side of the MCB, and connects to CD chassis tee-offs.

 Available on indent only.

Miniature circuit breakers Din-T10 series 10 kA MCB (cont.)

3 pole 3 modules

In (A)	B – Curve 3-5 In
0.5	DTCB10305B
1	DTCB10301B
2	DTCB10302B
4	DTCB10304B
6	DTCB10306B
10	DTCB10310B
13	i DTCB10313B
16	DTCB10316B
20	DTCB10320B
25	DTCB10325B
32	DTCB10332B
40	DTCB10340B
50	DTCB10350B
63	DTCB10363B



DTCB10
1 - 4 pole types



4 pole 4 modules ¹⁾

6	DTCB10406B
10	DTCB10410B
13	i DTCB10413B
16	DTCB10416B
20	DTCB10420B
25	DTCB10425B
32	DTCB10432B
40	DTCB10440B
50	DTCB10450B
63	DTCB10463B

Notes: ¹⁾ All poles include overcurrent and short circuit protection.

i Available on indent only.


Din-T MCBs Technical data

Characteristics according to BS EN 60898

Miniature Circuit Breakers are intended for the protection of wiring installations against both overloads and short-circuits in **domestic** or **commercial** wiring installations where operation is possible by **uninstructed** people

3

Tripping characteristic curves

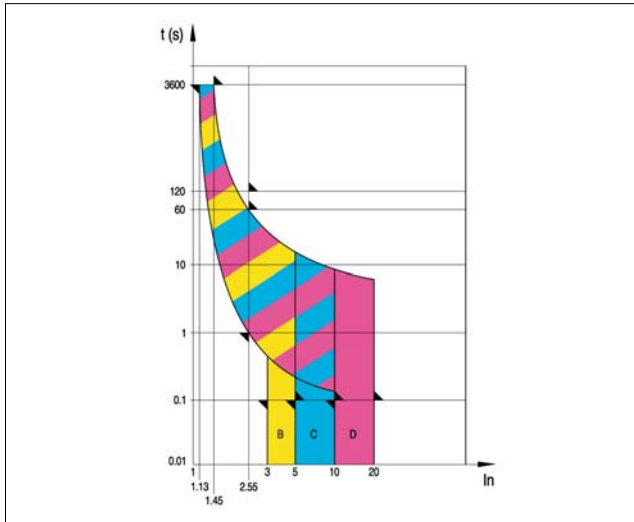

Magnetic release

An electromagnet with plunger ensures instantaneous tripping in the event of short-circuit. The NHP Din-T range has 3 different types, following the current for instantaneous release: types B, C and D curve.

IC _n (A)	Test current	Tripping time	Applications
B	3 x I _n 5 x I _n	0.1 < t < 45 s (I _n ≤ 32 A) 0.1 < t < 90 s (I _n > 32 A) t < 0.1 s	Only for resistive loads eg: <ul style="list-style-type: none"> electrical heating water heater stoves.
C	5 x I _n 10 x I _n	0.1 < t < 15 s (I _n ≤ 32 A) 0.1 < t < 30 s (I _n > 32 A) t < 0.1 s	Usual loads such as: <ul style="list-style-type: none"> lighting socket outlets small motors
D	10 x I _n 20 x I _n	0.1 < t < 4 s (**) (I _n ≤ 32 A) 0.1 < t < 8 s (I _n > 32 A) t < 0.1 s	Control and protection of circuits having important transient inrush currents (large motors)

Thermal release

The release is initiated by a bimetal strip in the event of overload. The standard defines the range of releases for specific overload values. Reference ambient temperature is 30 °C.

Test current	Tripping time
1.13 x I _n	t ≥ 1 h (I _n ≤ 63 A) t ≥ 2 h (I _n > 63 A)
1.45 x I _n	t < 1 h (I _n ≤ 63 A) t < 2 h (I _n > 63 A)
2.55 x I _n	1 s < t < 60 s (I _n ≤ 32 A) 1 s < t < 120 s (I _n > 32 A)

Rated short-circuit breaking capacity (I_{cn})

Is the value of the short-circuit that the MCB is capable of withstanding in the following test of sequence of operations: O-t-CO.

After the test the MCB is capable, without maintenance, to withstand a dielectric strength test at a test voltage of 900 V. Moreover, the MCB shall be capable of tripping when loaded with 2.8 I_n within the time corresponding to 2.55 I_n but greater than 0.1s.

Service short-circuit breaking capacity (I_{cs})

Is the value of the short-circuit that the MCB is capable of withstanding in the following test of sequence of operations: O-t-CO-t-CO.


After the test the MCB is capable, without maintenance, to withstand a dielectric strength test at a test voltage of 1500 V. Moreover, the MCB shall not trip at a current of 0.96 I_n. The MCB shall trip within 1h when current is 1.6 I_n.

- O - Represents an opening operation
- C - Represents a closing operation followed by an automatic opening.
- t - Represents the time interval between two successive short-circuit operations: 3 minutes.

The relation between the rated short-circuit capacity (I_{cn}) and the rated service short-circuit breaking capacity (I_{cs}) shall be as follows:

I _{cn} (A)	I _{cs} (A)
≤ 6000	6000
> 6000 ≤ 10000	0.75 I _{cn} min. 6000
> 10000	0.75 I _{cn} min. 7500

In both sequences all MCBs are tested for emission of ionized gases during short-circuit (grid distance), in a safety distance between two MCBs of 35 mm when devices are installed in two different rows in the enclosure. This performance allows the use of any NHP/Terasaki enclosure.

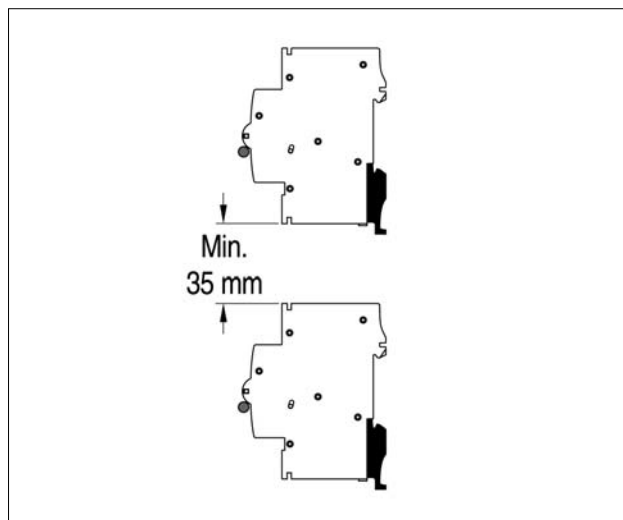


Din-T MCBs Technical data

Tripping curves according to EN 60898

The following tables show the average tripping curves of the Terasaki Din-T MCBs based on the thermal and magnetic characteristics.

Curve B

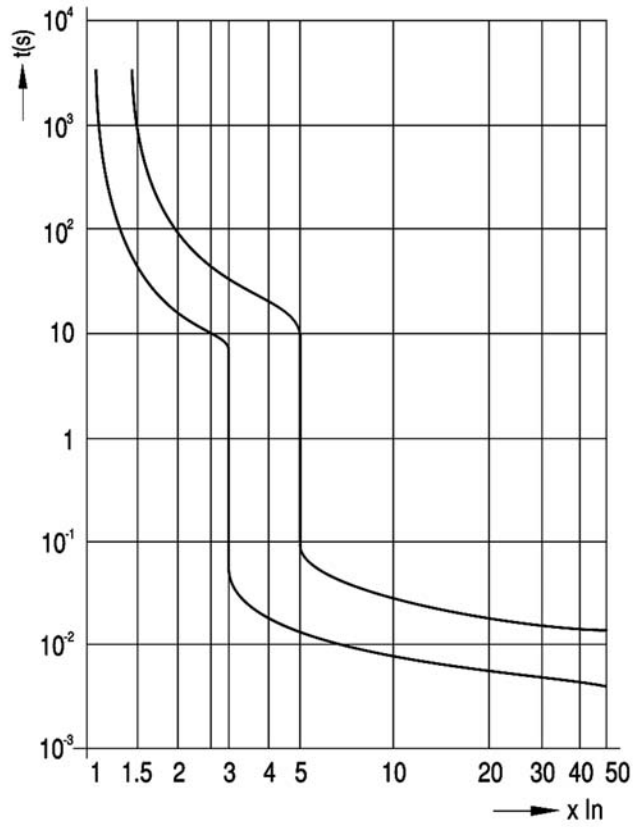



Din-T MCBs Technical data

Din-T 10

10 kA

B curve

3

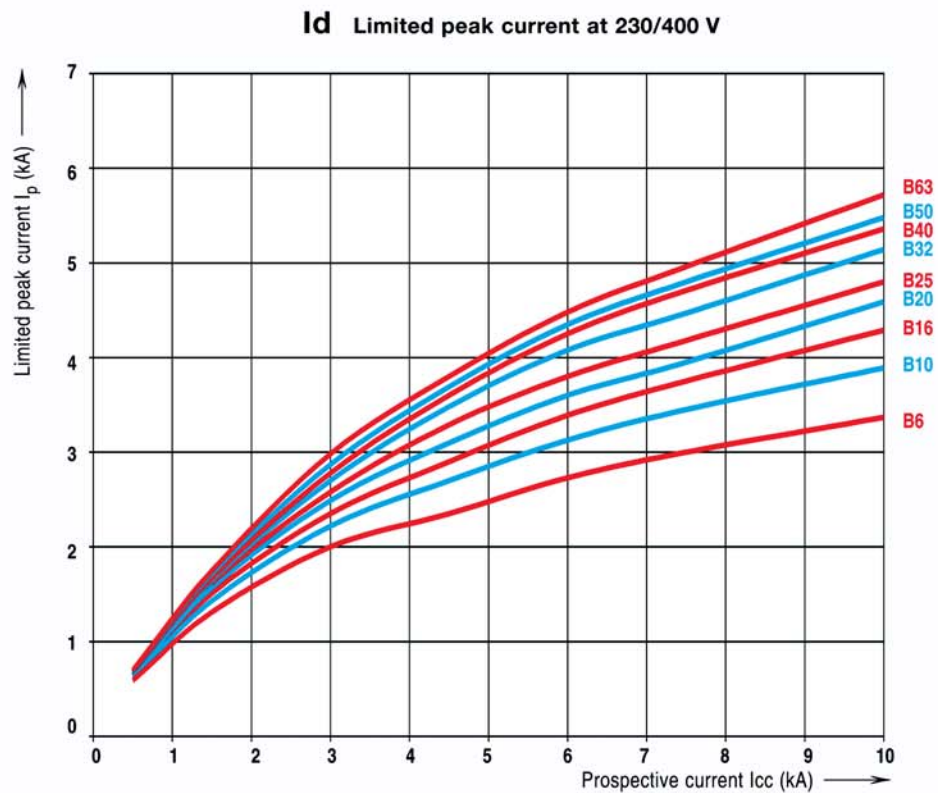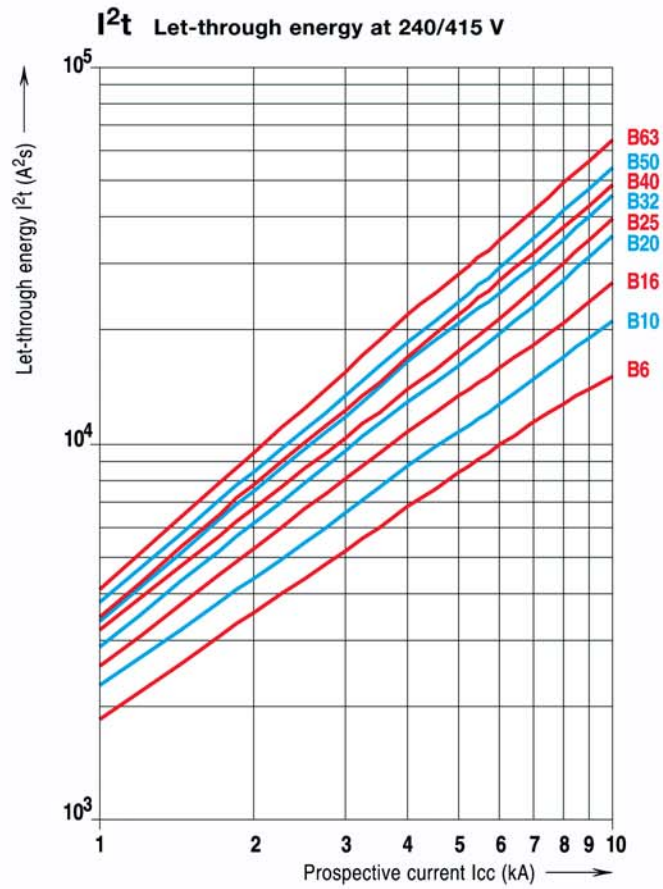

Din-T MCBs Technical data

Influence of ambient air temperature on the rated current

The maximum value of the current which can flow through an MCB depends on the nominal current of the MCB, the conductor cross-section and the ambient air temperature.

The values shown in the table below are for devices in free air. For devices installed with other modular devices in the same switchboard, a correction factor (K) shall be applied relative to the mounting situation of the MCB, the ambient temperature and the number of main circuits in the installation.

No of devices	K ¹⁾
2 or 3	0.9
4 or 5	0.8
6 or 9	0.7
> 10	0.6

Calculation example

Within a distribution board consisting of eight 2 Pole, 16 A, 'C' curve type MCBs, with an operating ambient temperature of 45 °C, which is the highest temperature the MCB can operate at without unwanted tripping?

Calculation

The correction factor $K = 0.7$, for use in an eight circuit installation: $16 \text{ A} \times 0.7 = 11.2 \text{ A}$


As the MCB is working at 45 °C it shall be given another factor (90 % = 0.9):

In at 45 °C = In at 30 °C \times 0.9 = 11.2 A \times 0.9 = 10.1 A.


Note: ¹⁾ Applicable for MCBs working at maximum rated currents.

The thermal calibration of the MCBs was carried out at an ambient temperature of 30 °C. Ambient temperatures different from 30 °C influence the bimetal and this results in earlier or later thermal tripping.


0.5 - 6 A

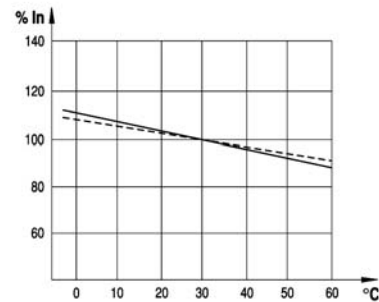


10 A

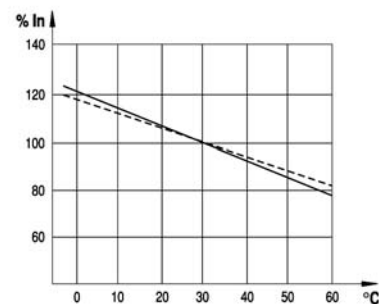

16 - 40 A

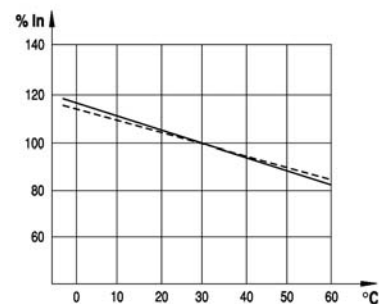

50 - 63 A

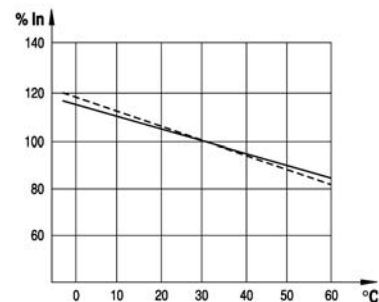

———— : 1P (single pole)

----- : mP (multi-pole)

Din-T MCBs Technical data

Effects of frequency on the tripping characteristic

All the MCBs are designed to work at frequencies of 50-60 Hz, therefore to work at different values, consideration must be given to the variation of the tripping characteristics. The thermal tripping does not change with variation of the frequency but the magnetic tripping values can be up to 50 % higher than the ones at 50-60 Hz.

Tripping current variation

60 Hz	100 Hz	200 Hz	300 Hz	400 Hz
1	1.1	1.2	1.4	1.5

Power losses

The power losses are calculated by measuring the voltage drop between the incoming and the outgoing terminals of the device at rated current.

Power loss per pole

In (A)	Voltage drop (V)	Energy loss (W)	Resistance (mOhm)
0.5	2.230	1.115	4458.00
1	1.270	1.272	1272.00
2	0.620	1.240	310.00
3	0.520	1.557	173.00
4	0.370	1.488	93.00
6	0.260	1.570	43.60
8	0.160	1.242	19.40
10	0.160	1.560	15.60
13	0.155	2.011	11.90
16	0.162	2.586	10.10
20	0.138	2.760	6.90
25	0.128	3.188	5.10
32	0.096	3.072	3.00
40	0.100	4.000	2.50
50	0.090	4.500	1.80
63	0.082	5.160	1.30
80	0.075	6.000	0.90
100	0.075	7.500	0.75
125	0.076	9.500	0.60


Limitation curves

Let-through energy I^2t

The limitation capacity of an MCB in short-circuit conditions, is its capacity to reduce the value of the let-through energy that the short-circuit would be generating.

Peak current I_p

Is the value of the maximum peak of the short-circuit current limited by the MCB.

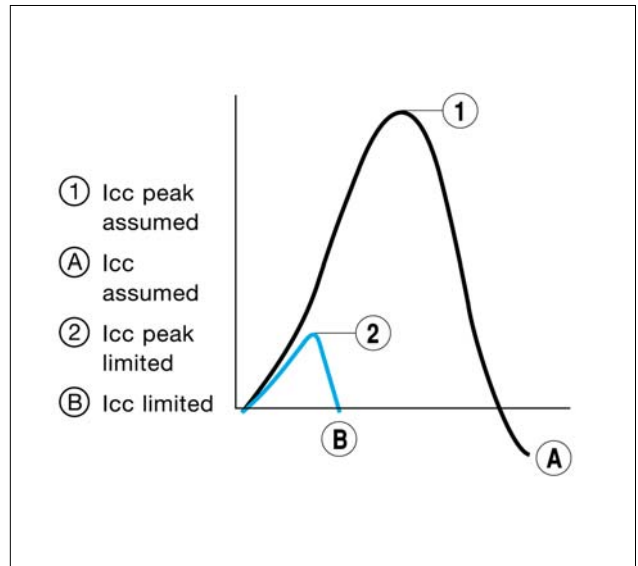

See following pages

Din-T MCBs Technical data

Use of standard MCB for DC use

For MCBs designed to be used in alternating current but used in installations in direct current, the following should be taken into consideration:

- For protection against overloads it is necessary to connect the two poles to the MCB. In these conditions the tripping characteristic of the MCB in direct current is similar to alternating current.

- For protection against short-circuits it is necessary to connect the two poles to the MCB. In these conditions the tripping characteristic of the MCB in direct current is 40% higher than the one in alternating current.

Use of special MCB Din-T DC for DC use.

(UC = Universal current)

For MCBs designed to work in both alternating and direct current, it is necessary to respect the polarity of the terminals since the device is equipped with a permanent magnet.

Use in DC selection table

Series	Rated current (A)	48 V 1 pole Icu (kA)	110 V 2 poles in series Icu (kA)	250 V 1 pole Icu (kA)	440 V 2 poles in series Icu (kA)
Din-T 10	0.5....63 A	25	30	-	-

Installation of Din-T DC MCBs in direct current

Din-T MCBs Technical data

Text for specifiers

MCB Series Din-T 10

- According to EN 60898 standard
- For DIN rail mounting according to DIN EN 50022; EN 50022; future EN 60715; IEC 60715 (top hat rail 35 mm)
- Grid distance 35 mm
- Working ambient temperature from -25 °C up to +50 °C
- Approved by CEBEC, VDE, KEMA, IMQ.
- 1 pole is a module of 18 mm wide
- Nominal rated currents are:
0.5/1/2/3/4/6/10/13/16/20/25/32/40/50/63 A
- Tripping characteristics: B,C,D (B curve Din-T 10 only).
- Number of poles: 1 P, 1 P+N, 2 P, 3 P, 3 P+N, 4 P
- The short-circuit breaking capacity is: 6/10k A, energy limiting class 3
- Terminal capacity from 1 up to 35 mm² rigid wire or 1.5 up to 25 mm² flexible wire.
- Screw head suitable for flat or Pozidrive screwdriver
- Can be connected by means of both pin or fork busbars
- The toggle can be sealed in the ON or OFF position
- Rapid closing
- Both incoming and outgoing terminals have a protection degree of IP 20 and they are sealable
- Isolator function thanks to Red/Green printing on the toggle.
- Maximum voltage between two phases; 440 V~
- Maximum voltage for utilisation in DC current: 48 V 1 P and 110 V 2 P
- Two position rail clip
- Mechanical shock resistance 40 g (direction x, y, z) minimum 18 shocks 5 ms half-sinusoidal acc. to IEC 60068-2-27
- Vibration resistance: 3 g (direction x, y, z) minimum 30 min. according to IEC 60068-2-6
- Extensions can be added on both left or right hand side
 - ☛ Auxiliary contact
 - ☛ Shunt trip
 - ☛ Undervoltage release
 - ☛ Motor operator
 - ☛ Panelboard switch
- Add-on RCD can be coupled.

Din-T MCBs + RCDs Technical data

			Din-T10	
Series			AS/NZS 4898	
Standards (Aust / NZ / International)			IEC 60898	
Tripping characteristics			B, C, D	
Nominal current	A		B(6-63), C/D(0.5-63)	
Calibration temperature	°C		30	
Number of poles (# mod)			1/2/3/4	
Neutral pole protected			yes	
Nominal voltage Un	AC	1 P	V	240/415
		3 P/4 P	V	415
	DC	1 P ¹⁾	V DC	48
		2 P (in series) ¹⁾	V DC	110
Frequency			Hz	50/60
			Hz	DC: magn.trip +40%
			Hz	400: magn.trip +50%
Maximum service voltage U _{bmax} between two wires		V	250/440; 53/120	
Minimum service voltage U _{bmin}		V	12; 12	
Selectivity class (IEC 60898)			3	
Isolator application	IEC 60947-2		yes	
Rated insulation voltage	Pollution degree 2	V	500	
	Pollution degree 3	V	440	
Impulse withstand test voltage		kV	6	
Insulation resistance		mΩ	10,000	
Dielectric rigidity		kV	2.5	
Vibration resistance (in x, y, z direction) (IEC 77/16.3)			3 g	
Endurance	Electrical at Un, In		10,000	
	mechanical		20,000	
Utilisation category (IEC 60947-2)			A	
Protection degree (outside / inside, in enclosure with door)			IP 20/IP 40	
Self-extinguish degree (according to UL94)			V2	
Tropicalisation (according to IEC 60068-2 / DIN 40046)	°C/RH		+55 °C/95 % RH	
Operating temperature	°C		-25/+55	
Storage temperature	°C		-55/+55	
Terminal capacity	Rigid cable min/max (top)	mm ²	1/35	
	Flexible cable min*/max (top)	mm ²	0.75/25	
	Rigid cable min/max (bottom)	mm ²	1/35	
	Flexible cable min*/max (bottom)	mm ²	0.75/25	
	(* Flexible cable 0.75/1/1.5 mm ² with cable lug)			
	Torque	Nm	4.5	
Add-on devices (side add-on)	Auxiliary contacts		yes	
	UVT		yes	
	Shunt trip		yes	
	Motor operator		yes	
	Panelboard switch		yes	
Busbar systems	Pin (top/bottom)		yes/yes	
	Fork (top/bottom)		-/yes	
Accessories			yes	
Dimensions, weights, packaging				
	(HxDxW) 86x68xW	mm/mod.	18	
	Weight/mod.	g	120	
	Package	mod.	12	
Short-circuit capacity AC (kA)			AS/NZS 4898	
IEC 60898	I _{cn}	1 P	230/400 V	10
		2 P	230/400 V	10
		3 P/4 P	230/400 V	10
	I _{cs} (service)			75 % I _{cn}
IEC 60947-2	I _{cu} (ultimate)	1 P	127 V	30
			240 V	15
			415 V	4
		2 P	127 V	40
			240 V	30
			415 V	15
	3 P, 4 P	240 V	30	
		415 V	15	
	440 V	10		
	I _{cs} (service)			50 % I _{cu}
NEMA AB1 (120/240V)			30	
Short-circuit capacity DC (kA)				
IEC 60947-2	I _{cu} (ultimate)	1 P	≤60 V	25
			≤220 V	-
	2 P	≤125 V	30	
		≤440 V	-	
I _{cs} (service)			100 % I _{cu}	

Notes Refer pages 3 - 23, 24 for information on SAFE-T MCBs.

¹⁾ Preferred values of rated control supply voltage (IEC 60947 - 2): 24 V, 48 V, 110 V, 125 V, 250 V

²⁾ 0.5-4 A/6-25 A/32-40 A/50-63 A

³⁾ 10 (125 V DC)

⁴⁾ 10 (250 V DC)

⁵⁾ On request.

Din-T MCBs Technical data

Miniature circuit breakers - Din-T 10

Dimensions in mm.

3

