Catalogue No: EREV4-9PB-415VAC

STARTER COMPACT REVERSING START/STOP 4kW 415V AC CONTROL

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW





Reversing Starter 4KW, IP66 Polycarbonate Enclosure, Control voltage 415 V AC, Forward, Reverse And Stop/Reset Pushbuttons, No Overload

- Wide range of NHP motor starting method versions available, allowing for correct selection of a motor starter to suit the application load condition requirements during starting
- Available in a number of IP ratings and enclosure type, to allow selection to meet the different installation environments
- Consult NHP for complete offering

Representative Photo Only (actual product may vary based on configuration selections)

SPECIFICATIONS	
Product Series	Streamline Enclosed Motor Starters
kW Rating, AC-3, 415V	4 kW @415V
kW Rating, AC-3, 415V, Max	4.5 kW @415V max
Component Type Motor Control and Drives	Reversing Starter
Motor FLC, Max	9 A, max
IP Rating	IP66
Motor Connection	3 wire
Enclosure Type	Insulated polycarbonate enclosed (IP 66)
Control Voltage, AC, Nom	415 V AC
Button Arrangement	Forward / Reverse / Stop Reset
REFERENCES	
IECEx Certificate -	
Supplier Declaration of Conformity:	
Installation Guide: -	
User Manual: -	
Manufacturer Datasheet: -	
Manufacturer Catalogue	




Catalogue No: EREV4-9PB-415VAC

STARTER COMPACT REVERSING START/STOP 4kW 415V AC CONTROL





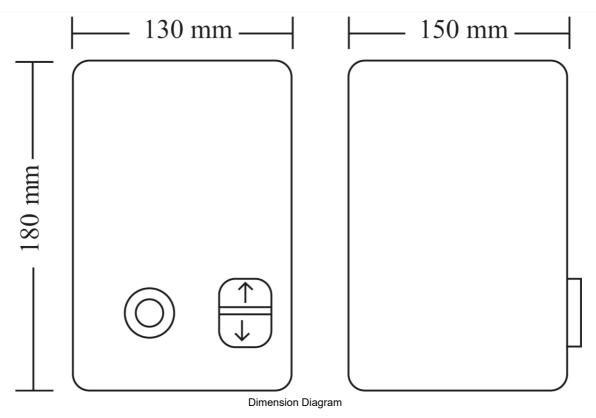



Catalogue No: EREV4-9PB-415VAC

STARTER COMPACT REVERSING START/STOP 4kW 415V AC CONTROL

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW



