

# Catalogue No: **NTMF 400**

## FUSE 400A 500V AC gG SIZE B4 111mm CENTRES

Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuses and Fuse Holders > NHP Fuses and Fuse Holders > BS Fuse Links > Bolted Type Centre Tag



Representative Photo Only  
(actual product may vary based on configuration selections)

### Fuse 400A 500V AC gG Size B4 111mm Centres

- Complies to BS standard
- 80 kA fault interruption capacity
- Type gG for general, cable, line and motor protection
- 2 to 1250 A range
- 415V AC, 500V AC and 550V AC ratings.

#### SPECIFICATIONS

Product Series	NTMF
Component Type Fuse-gear	Fuse Link
Fuse Current Rating	400 A
Fuse Characteristic Type(s)	gG
Fuse Cartridge Size	B4 size
Un, Nominal Operational Voltage, AC	415 V AC
Ue, Rated Operational Voltage, AC, max	415 V AC
Current, Breaking Capacity at Un	80 kA @Un
Height	137 mm
Width	50.5 mm
Depth	50.5 mm
Standards Compliance	AS 60269-1:2005 BS 88 DIN 43620 IEC 60269-1 IEC 60269-2 VDE 0636-10
Certifications	ASTA




# Catalogue No: **NTMF 400**

## FUSE 400A 500V AC gG SIZE B4 111mm CENTRES

Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuses and Fuse Holders > NHP Fuses and Fuse Holders > BS Fuse Links > Bolted Type Centre Tag



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

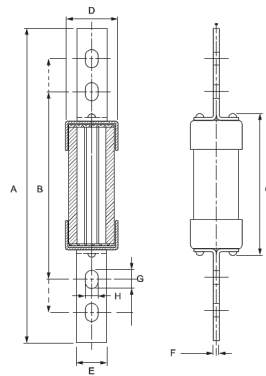

Series	Category	Brand	A Overall Length	B Fitting Centres	C Body Length	D Body Diameter	E Tag Width	F Tag Thickness	G Hole Length	H Hole Width
<b>NTBC 2 - 40</b>	B1	FuseMaster	137	111	45	22	15	1.4	14	8.7
<b>NTBC 50 - 63</b>	B1	FuseMaster	135	111	65	31.8	17	3.2	11	8.7
<b>NTBC 63M</b>	B1	Lawson	137	111	45	26	20	3.2	14	8.7
<b>NTC 80 - 100</b>	B1	FuseMaster	135.5	111	65	31.8	17	3.2	11	8.7
<b>NTC 100M</b>	B1	Lawson	137	111	45	35	20	3.2	14	8.7
<b>NTF 125 - 200</b>	B2	FuseMaster	131.5	111	72	39.5	19	3.2	11	8.7
<b>NTF 200M</b>	B2	Lawson	137	111	45	41	20	3.2	14	8.7
<b>NTKF250S</b>	B3	EATON	135.5	111	70	40	25.4	3.2	11	8.7
<b>NTKF 250 - 315</b>	B3	FuseMaster	135.5	111	70	50.5	25.4	3.2	11	8.7
<b>NTKF 315M</b>	B3	Lawson	137	111	45	51	26	6.4	14	8.7
<b>NTKM 250 - 355</b>	B4	FuseMaster	136.5	111	72	41	25.4	5.3	11	8.7
<b>NTMF 355 - 400</b>	B4	FuseMaster	137	111	52	50.5	26	6.4	16	8.7

Dimension Diagram