

Catalogue No: **RQ72E AAC 5A**  
**AMMETER DIRECT CONNECT 0-5/25A AC**

Energy Management and Building Automation > Energy Management and Metering > Analogue and Digital Meters > IME Analogue Meters > Panel Mount AC Ammeters > 90° Deflection Direct Connect



**AMMETER 0-5/25A AC DIRECT CON**



- Accuracy class 1.5 (AS 60051)
- 600V operational voltage rating
- Operating temperature -25 to +50°C
- Ammeter overload parameters: 1.2 x I<sub>n</sub> continuous / 10 x I<sub>n</sub> for 5s
- Voltmeter overload parameters: 1.2 x U<sub>n</sub> continuous / 2 x U<sub>n</sub> for 5s
- IP52 rated front frame

Representative Photo Only  
 (actual product may vary based on configuration selections)

**SPECIFICATIONS**

Product Series	RQ72E
Component Type Metering	Analogue Meter
Meter Type	Instantaneous Current
Input Range(s)	0 ... 5A
Input Units	A
Display (Output) Units	A
Display (Output) Range(s)	0 ... 5A
Ovrange Display	Yes
Ovrange Maximum	30A
Deflection	90 °
Movement Type	Moving iron
Connection Method	Direct connect
Terminal Type	Screw Terminal(s)
Burden, Rated	1.1 VA
Accuracy Class	1.5 Class
U <sub>e</sub> , Rated Operational Voltage, AC, max	600 V AC
Current, Overload Capacity, Continuous	0.006 kA
Current, Overload Capacity, 5s (rms)	0.05 kA
Input Frequency, Nom	50 Hz
Input Frequency, Min	45 Hz
Input Frequency, Max	65 Hz
Installation Category	III
Pollution Degree	2
U <sub>i</sub> , Rated Insulation Voltage	600 V (rms)
Number of meter displays	1
Height, Window	72 mm
Width, Window	72 mm
Height, Cutout	68 mm

# Catalogue No: **RQ72E AAC 5A**

## AMMETER DIRECT CONNECT 0-5/25A AC

Energy Management and Building Automation > Energy Management and Metering > Analogue and Digital Meters > IME Analogue Meters > Panel Mount AC Ammeters > 90° Deflection Direct Connect



Width, Cutout	68 mm
Depth	69 mm
Weight	0.15 kg
Material, Body / Housing	PC (Polycarbonate) material
Mounting	Panel Mount
IP Rating, Front	IP52
IP Rating, Back	IP20
Operating Temperature, Min	-25 °C min
Operating Temperature, Max	50 °C max
Storage Temperature, Min	-40 °C min
Storage Temperature, Max	80 °C max
Relative Humidity, Max	85 %RH
Humidity Type	Non-condensing
Shock Rating	IEC 60051-1
Vibration Displacement (Peak to Peak Max.)	2 mm
Vibration Frequency, Operational (Max.)	80 Hz
Vibration Rating	IEC 60068-2-6
Standards Compliance	IEC 60051 IEC 60051-1 IEC 60068-2-6 IEC 61010-1 IEC 60529

### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-


Catalogue No: **RQ72E AAC 5A**  
**AMMETER DIRECT CONNECT 0-5/25A AC**

Energy Management and Building Automation > Energy Management and Metering > Analogue and Digital Meters > IME Analogue Meters > Panel Mount AC Ammeters > 90° Deflection Direct Connect




**AQ/RQ Analogue meters**

**Meter dimensions**

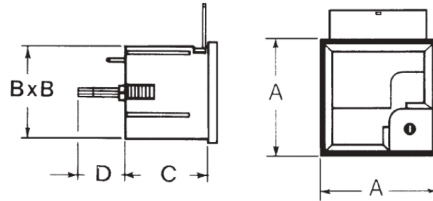

**Meter cut-out dimensions**



**Overall dimensions (mm)**

Cat. No.	A	B	C	D	E
<b>RQ48</b>	48 x 48	44.5 x 44.5	40	22	45
<b>AQ48</b>	48 x 48	44.5 x 44.5	57.5	22	45
<b>RQ72</b>	72 x 72	66.5 x 66.5	44	12	68
<b>AQ72</b>	72 x 72	66.5 x 66.5	59	12	68
<b>RQ96</b>	96 x 96	91 x 91	44	12	92
<b>AQ96</b>	96 x 96	91 x 91	59	12	92

Dimension Diagram