


# Catalogue No: **SSPC7-15-240VAC**

## SOFT STARTER ENCLOSED 3 WIRE 15KW 240VAC

Motor Control and Drives > Soft Starters, Low Voltage > Industrial Soft Starters > Sprecher + Schuh Soft Starters > IP66 Enclosed PCS Soft Starters up to 45kW, 85A > Polycarbonate Enclosure



Soft Starter IP66 Polycarbonate Enclosure 15KW, 3 Wire, Control Voltage 240V AC

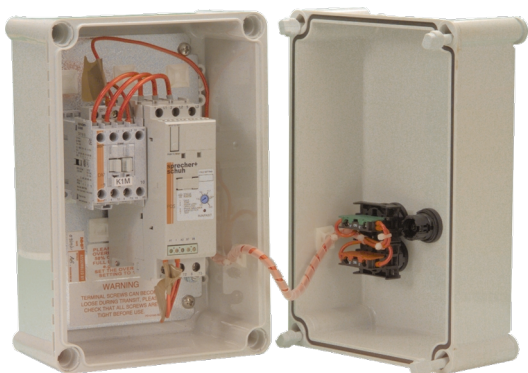

- Compact, true three-phase control in a cost-effective package with overload protection, integral bypass, and motor and system diagnostics
- Simple to adjust and setup for ease of use

Representative Photo Only  
(actual product may vary based on configuration selections)

### SPECIFICATIONS


IP Rating	IP66
Component Type Motor Control and Drives	Assembled Soft Starter
kW Rating, AC-3, 415V, Min	5.5 kW @415V min
kW Rating, AC-3, 415V, Max	15 kW @415V max
Soft Starter Item Number	PCS030480V
Motor FLC, Min	10 A, min
Motor FLC, Max	30 A, max
Details, Contactor, Main	CA7-30 Main
Control Voltage, AC, Nom	240 V AC

### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **SSPC7-15-240VAC**  
**SOFT STARTER ENCLOSED 3 WIRE 15KW 240VAC**

Motor Control and Drives > Soft Starters, Low Voltage > Industrial Soft Starters > Sprecher + Schuh Soft Starters > IP66  
Enclosed PCS Soft Starters up to 45kW, 85A > Polycarbonate Enclosure

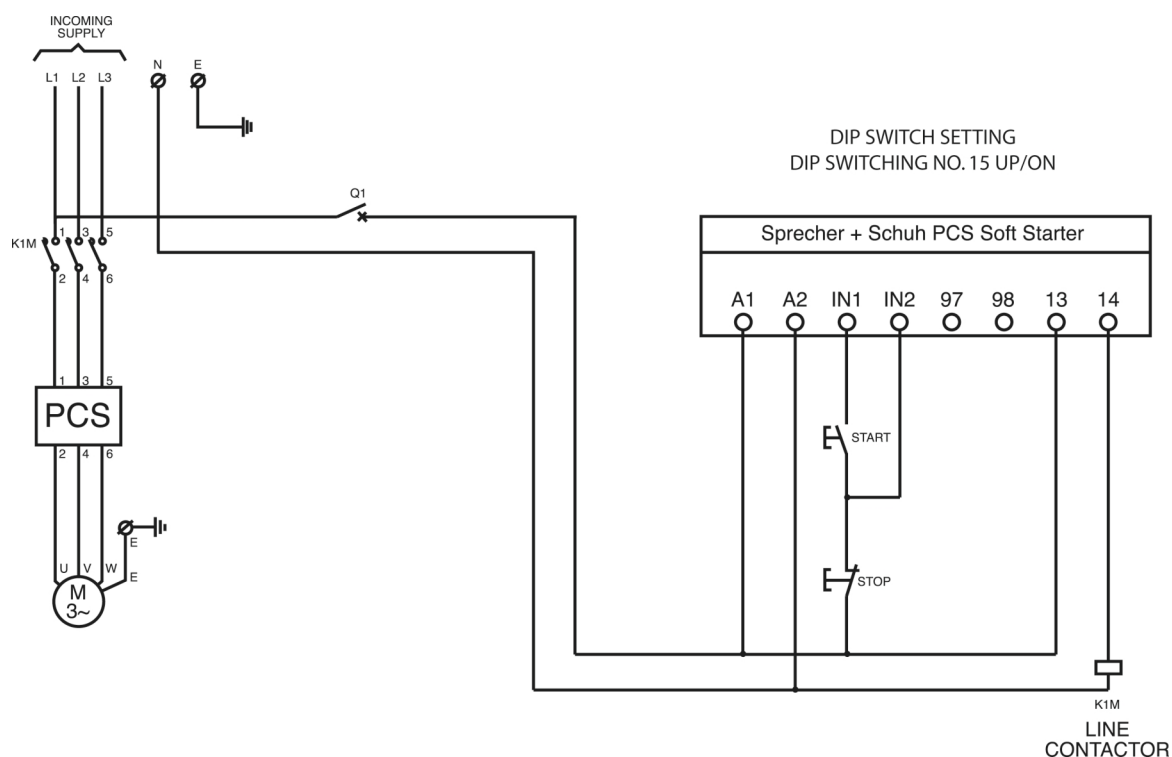

Connection / Wiring Diagram