


# Catalogue No: **V7-WD4C**

## SCREW TERMINAL 4mm 2 CONDUCTOR 32A COMMON BAR

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Double-deck Diode Terminals



### Terminal Through Double Deck 2.5mm<sup>2</sup>

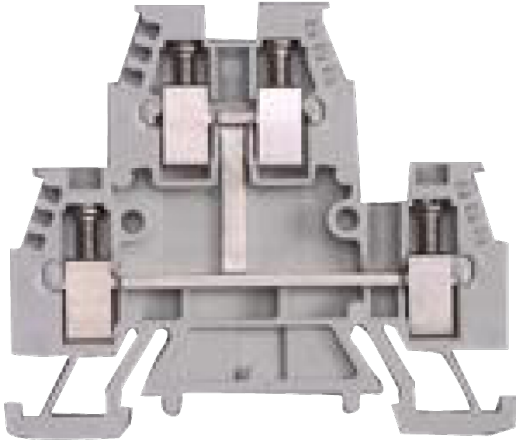

Representative Photo Only  
(actual product may vary based on configuration selections)

- Designed for ease of wiring, secure connections and durability
- Comprehensive range, offering a wide array of terminal types for most circuits and functions
- Terminals accommodate a full range of wire sizes from 0.5 to 70mm<sup>2</sup> wire cross section
- Cone shaped guide allows easy wire insertion
- Specialty terminals including two-level, grounding, diode, isolating, fuse, sensor and thermocouple terminals
- International approvals, UL recognized, IEC and CSA certified.

#### SPECIFICATIONS

Product Series	V7
Component Type Termination Wiring	Terminal
Number of Levels	2
Package Quantity	50 qty
Colour, Body / Housing	Grey colour
Wire / Conductor Size (Min)	0.5 mm <sup>2</sup> min
Wire / Conductor Size (Max)	4 mm <sup>2</sup>
Wire Strip Length	10 mm
Tightening Torque, Nominal	0.6 Nm
In, Rated Current	10 A
Un, Nominal Voltage	300 V
Height	64 mm
Width	6 mm
Depth	48.6 mm
Operating Temperature, Min	-20 °C min
Operating Temperature, Max	40 °C max
Insulation Temperature (Min)	-40 °C
Insulation Temperature (Max)	90 °C
Standards Compliance	IEC 60947-1 IEC 60947-7-1 IEC 60947-7-2 CSA C22.2 No.158 UL 1059 UL 457 UL 486E
Certifications	CSA UR

Catalogue No: **V7-WD4C**

**SCREW TERMINAL 4mm 2 CONDUCTOR 32A COMMON BAR**

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Double-deck Diode Terminals



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	<a href="#">V7WD4C_Manufacturer Catalogue</a>

