


VN Series Conductive Level Probes, 3 x 1m stainless steel electrodes, nylon 6 housing, 1.5" pipe thread, IP67 rating

- 2 or 4 point level control
- Teach-in functionality
- Up to 2 independent relay outputs
- Plug-in type 11 pin

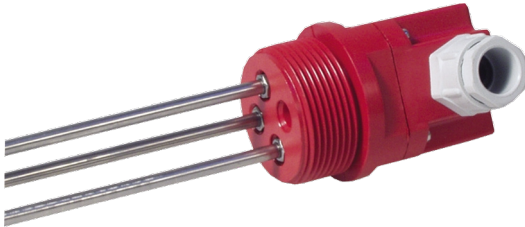

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

| | |
|--|---|
| Component Type Field Switching & Sensing | Conductive Level Probe |
| Thread Size | 1.5" - 24 BSPP / ISO 228 size |
| Material, Electrode | Stainless Steel, 316L material |
| Number of Electrodes | 3 qty |
| Diameter, Electrode | 5 mm |
| Diameter, Probe | 5 mm |
| Length, Probe | 1000 mm |
| Connection / Termination | Built-in cable with flying leads |
| Material, cable jacket | PVC material |
| Length, Cable | 2 m |
| Pressure Rating | 10 bar |
| IP Rating | IP67 |
| Material, Body / Housing | Nylon / PA6 / PA66 (Polyamide 6) material |
| Operating Temperature, Max | 90 °C max |
| Operating Temperature, Min | 0 °C min |
| Storage Temperature, Max | 100 °C max |
| Storage Temperature, Min | -25 °C min |
| Standards Compliance | IEC 60529 |
| Certifications | CE |

Catalogue No: **VN3**

LEVEL PROBE 3 x 1M S/STEEL ELECTRODES NYLON HOUSING

Field Switching and Sensing > Flow, Pressure, Level and Measuring Devices > Level Sensors > Carlo Gavazzi Level Sensors > Conductive Level Control > Conductive Level Probes



REFERENCES

IECEX Certificate -

Supplier Declaration of Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: [VN3_Manufacturer Datasheet](#)

Manufacturer Catalogue & Product Selection: -