



Representative Photo Only  
(actual product may vary based on configuration selections)

#### Fuse Switch SSF BS 3 Pole 250A External Handle Kit

- 90 degree rotatory open-close. Supplied with handle and shaft for external operation
- Handles and switches fuse bodies both include a padlock facility to lock OFF the switch for lockout tagout (LOTO) insulation
- Suits bolt-in fuse links 20 to 1250 A
- 100 kA fault rating
- Double breaking per pole (top or bottom) for isolated fuse removal
- Positive break indication
- Option: Fuse monitoring devices for remote blown fuse indication
- Complies to BS standard
- IP30
- Base mounting

#### SPECIFICATIONS

Product Series	SSF
Component Type Fuse-gear	Fuse Switches
Fuse Cartridge Size	B1-B2-B3 size
Fuse Current Rating	250 A
Un, Nominal Operational Voltage, AC	690 V AC
Ue, Rated Operational Voltage, AC, min	400 V AC
Ue, Rated Operational Voltage, AC, max	690 V AC
Ue, Rated Operational Voltage, DC, min	220 V DC
Ue, Rated Operational Voltage, DC, max	440 V DC
Ie, Rated Operational Current, AC-21a, 400V	250 A@400V
Ie, Rated Operational Current, AC-21a, 415V	250 A@415V
Ie, Rated Operational Current, AC-21a, 690V	250 A@690V
Ie, Rated Operational Current, AC-22a, 400V	250 A@400V
Ie, Rated Operational Current, AC-22a, 690V	250 A@690V
Ie, Rated Operational Current, AC-23a, 400V	250 A@400V
Ie, Rated Operational Current, AC-23a, 415V	250 A@415V
Ie, Rated Operational Current, AC-23a, 690V	250 A@690V
Ie, Rated Operational Current, DC-21a, 220V	250 A@220V
Ie, Rated Operational Current, DC-21a, 440V	250 A@440V
Ie, Rated Operational Current, DC-22a, 220V	250 A@220V
Ie, Rated Operational Current, DC-22a, 440V	250 A@440V
Ie, Rated Operational Current, DC-23a, 220V	200 A@220V
Ie, Rated Operational Current, DC-23a, 440V	200 A@440V
Current, Fuse-Protected Short-Circuit Capacity, 400V	32.5 kA
Icw, short time withstand current, 1s (rms)	80 kA for 1s
kW Rating, AC-23a, 400V, 3ph	132 kW @400V
kW Rating, AC-23a, 690V, 3ph	220 kW @690V
Poles	3P

FUSE SWITCH SSF BS EXTERNAL HANDLE KIT 3P 250A


Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuse Switches > Socomec Fuse Switches (SSF and PSF Series) > SSF Standard Switch Fuses (20 to 1250A) > BS Fuse Types



IP Rating	IP30
Uimp, Impulse Withstand Voltage	8 kV
Ui, Rated Insulation Voltage	750 V (rms)
Wire / Conductor Size, Flex Cable, Min	95 mm <sup>2</sup> min
Wire / Conductor Size, Flex Cable, Max	240 mm <sup>2</sup> max
Mechanical Service Life	10000 cycles
Operating Temperature, Max	70 °C max
Height	195 mm
Width	234 mm
Depth	195 mm
Weight	3.8 kg
Standards Compliance	IEC 60947-3 AS/NZS 60947-3 AS 60269.2.1 IEC 60269-2-1
Certifications	CCC KEMA

## REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

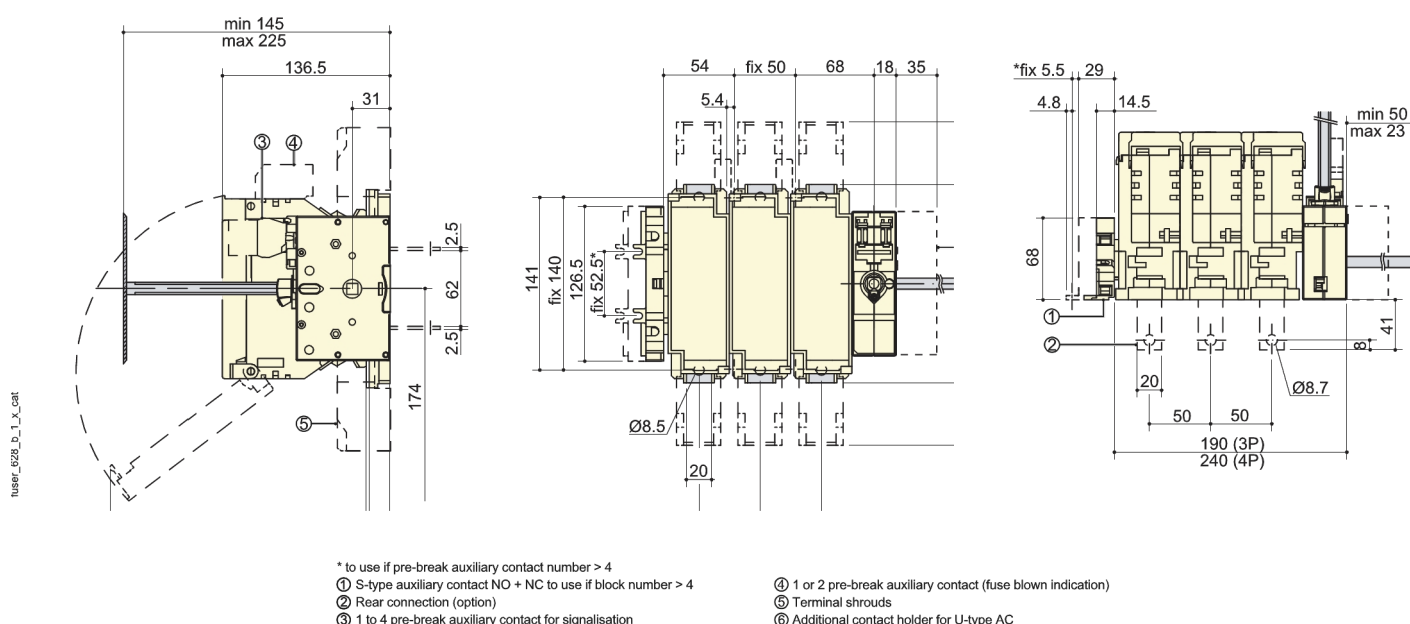

Catalogue No: **SSFBS2503P**

## FUSE SWITCH SSF BS EXTERNAL HANDLE KIT 3P 250A

Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuse Switches > Socomec Fuse Switches (SSF and PSF Series) > SSF Standard Switch Fuses (20 to 1250A) > BS Fuse Types



Dimension Diagram