


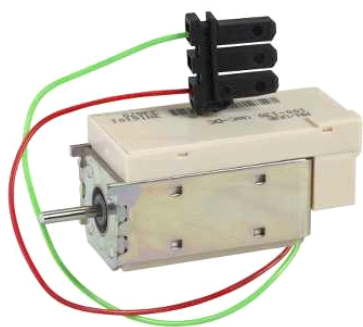

Main	
Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	Compact Compact NS1600b...3200 Compact Compact NS630b...1600 Masterpact Masterpact NT Masterpact Masterpact NW
Offer type	C4 C5
Voltage release type	Shunt trip release
Control circuit voltage	48 V AC 48...60 V DC

Complementary	
Threshold tripping voltage	0.7...1.1 Un
Supply holding power	4.5 VA
Response time	50 ms
Accessory / separate part category	Spare parts Masterpact NT Spare parts Masterpact NW Spare parts Compact NS1600b...3200 Spare parts Compact NS630b...1600

Environment	

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.