



### Main

|                           |                                       |
|---------------------------|---------------------------------------|
| Range of product          | Harmony 9001K<br>Harmony 9001SK       |
| Product or component type | Light block                           |
| Device short name         | 9001K                                 |
| Bulb base                 | BA 9s                                 |
| Light block supply        | Direct via integral transformer (6 V) |

### Complementary

|                           |              |
|---------------------------|--------------|
| Product weight            | 0.144 kg     |
| Light source              | Incandescent |
| [Us] rated supply voltage | 230 V AC     |

### Environment


|  |  |
|--|--|
| protective treatment                       | TC   |
| ambient air temperature for storage        | -40...70 °C  |
| ambient air temperature for operation      | -25...70 °C  |
| IP degree of protection                    | IP20 conforming to IEC 60529   |
| standards                                  | EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-4<br>JIS C 4520<br>JIS C 852<br>UL 508<br>CSA C22.2 No 14 |
| product certifications                     | NEMA<br>UL 508   |
| class of protection against electric shock | Class II conforming to IEC 61140   |
| vibration resistance                       | 7 gn (f = 2...500 Hz) conforming to IEC 60068-2-6  |
| shock resistance                           | 50 gn conforming to IEC 60068-2-27   |

### Offer Sustainability

|                                  |   |
|----------------------------------|---|
| Sustainable offer status         | Green Premium product   |
| RoHS (date code: YYWW)           | Compliant - since 0921 - Schneider Electric declaration of conformity |
| REACH                            | Reference not containing SVHC above the threshold                     |
| Product environmental profile    | Available   |
| Product end of life instructions | Need no specific recycling operations                                 |

### Dimensions

mm  
in.

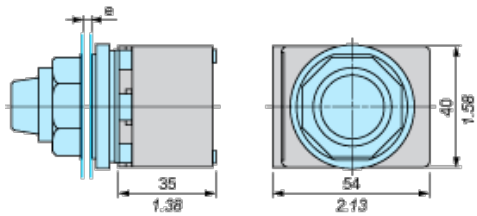

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.