


## LC3D32AB7

TeSys D - star delta starter - 3 x 3P (3 NO) - 32 A - 24 V AC coil

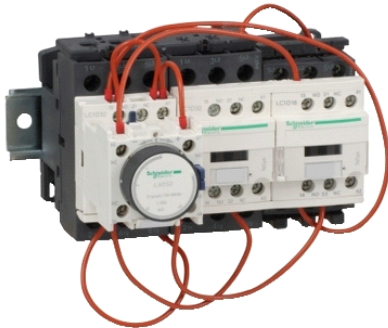

### Main

Range	TeSys
Product name	TeSys D
Product or component type	Star delta starter
Device short name	LC3D
Contactor application	Motor control
Utilisation category	AC-3
Device presentation	Pre-wired
Poles description	3 x 3P
Pole contact composition	3 x 3 NO
[Ue] rated operational voltage	<= 690 V AC 25...400 Hz for power circuit
[Ie] rated operational current	32 A (<= 60 °C) AC AC-3 for power circuit at <= 440 V
Motor power kW	15 kW at 220/230 V AC 50/60 Hz 25 kW at 380/400 V AC 50/60 Hz 30 kW at 415 V AC 50/60 Hz 30 kW at 440 V AC 50/60 Hz
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	
Auxiliary contact composition	1 NC for KM1 star contactor
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947
Overvoltage category	III
Electrical durability	1.65 Mcycles 32 A AC-3 <= 440 V
Provided equipment	Protective cover
Interlocking type	Mechanical
Mounting support	Plate
Standards	EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 CSA C22.2 No 14
Product certifications	BV CCC CSA DNV GL GOST LROS (Lloyds register of shipping) RINA UL

### Complementary

Connections - terminals

Screw clamp terminals for control circuit 1 1...4 mm<sup>2</sup> flexible without cable end  
Screw clamp terminals for control circuit 2 1...4 mm<sup>2</sup> flexible without cable end  
Screw clamp terminals for control circuit 1 1...4 mm<sup>2</sup> flexible with cable end  
Screw clamp terminals for control circuit 2 1...2.5 mm<sup>2</sup> flexible with cable end  
Screw clamp terminals for control circuit 1 1...4 mm<sup>2</sup> solid without cable end  
Screw clamp terminals for control circuit 2 1...4 mm<sup>2</sup> solid without cable end  
Screw clamp terminals for power circuit 1 2.5...10 mm<sup>2</sup> flexible without cable end  
Screw clamp terminals for power circuit 2 2.5...10 mm<sup>2</sup> flexible without cable end  
Screw clamp terminals for power circuit 1 1...10 mm<sup>2</sup> flexible with cable end  
Screw clamp terminals for power circuit 2 1.5...6 mm<sup>2</sup> flexible with cable end  
Screw clamp terminals for power circuit 1 1.5...10 mm<sup>2</sup> solid without cable end

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Screw clamp terminals for power circuit 2 2.5...10 mm<sup>2</sup> solid without cable end

Tightening torque	1.7 N.m for control circuit screw clamp terminals flat Ø 6 mm 1.7 N.m for control circuit screw clamp terminals Philips No 2 2.5 N.m for power circuit screw clamp terminals flat Ø 6 mm 2.5 N.m for power circuit screw clamp terminals Philips No 2
Mechanical durability	15 Mcycles
Operating rate	30 cyc/h at ≤ 60 °C
Starting time	30 s
Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 U <sub>c</sub> at 60 °C drop-out 50/60 Hz 0.8...1.1 U <sub>c</sub> at 60 °C operational 50 Hz 0.85...1.1 U <sub>c</sub> at 60 °C operational 60 Hz
Inrush power in VA	70 VA at 20 °C 0.75 60 Hz 70 VA at 20 °C 0.75 50 Hz
Hold-in power consumption in VA	7.5 VA at 20 °C 0.3 60 Hz 7 VA at 20 °C 0.3 50 Hz
Heat dissipation	2...3 W at 50/60 Hz
Auxiliary contacts type	Mechanically linked conforming to IEC 60947-5-1 3 x 1 NO + 1 NC Mirror contact conforming to IEC 60947-4-1 3 x 1 NC
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
Switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on energisation between NC and NO contact 1.5 ms on de-energisation between NC and NO contact
Width	166 mm
Height	124 mm
Depth	149 mm
Product weight	2.03 kg


## Environment

insulation resistance	> 10 MOhm for signalling circuit
IP degree of protection	IP20 front face conforming to IEC 60529
protective treatment	TH conforming to IEC 60068-2-30
pollution degree	3
ambient air temperature for storage	-60...80 °C
ambient air temperature for operation	-40...70 °C at U <sub>c</sub>
operating altitude	3000 m without derating in temperature
fire resistance	850 °C conforming to IEC 60695-2-1
flame retardance	V1 conforming to UL 94
mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Vibrations contactor closed 4 Gn, 5...300 Hz Shocks contactor closed 15 Gn for 11 ms Shocks contactor open 8 Gn for 11 ms

## Offer Sustainability



Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0845 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

## Dimensions

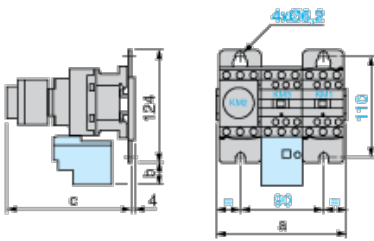

LC3		D09A	D12A	D18A	D32A
a		143	143	144	165
b		26.5	26.5	26.5	32.5
c	with LAD S	139	139	139	145
	with LAD S and sealing cover	143	143	143	149

## Wiring

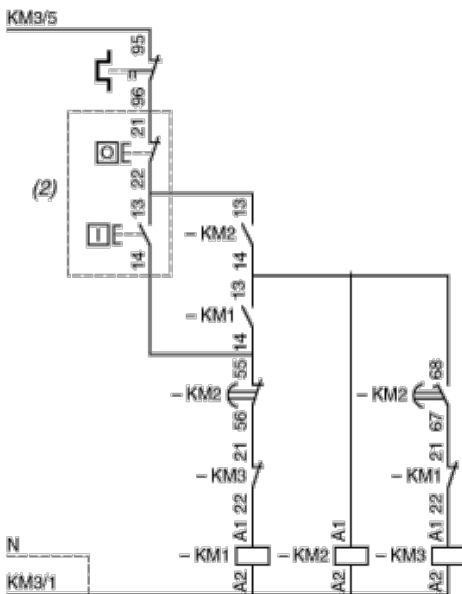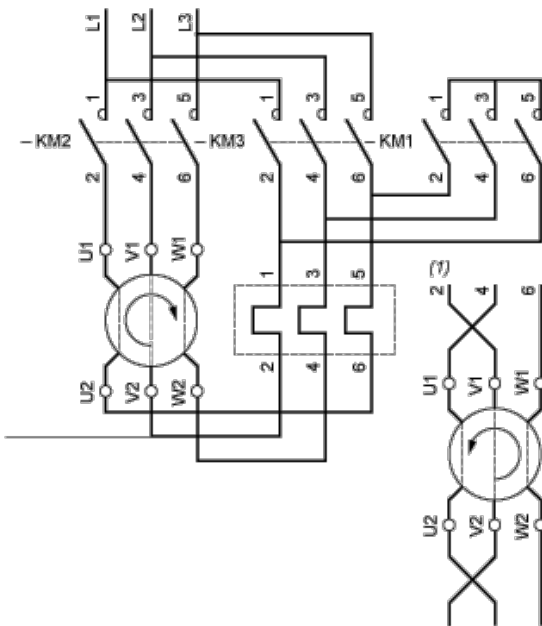

- (1) Recommended cabling for reversal of motor rotation (standard motor, viewed from shaft end).  
 (2) Remote control.

**NOTE:** LC3 D09A to D18A: Mechanical interlock between KM3 and KM1.