

Main

|                                    |   |
|------------------------------------|---|
| Accessory / separate part category | Cabling accessories   |
| Accessory / separate part type     | Connector   |
| Electrical connection              | Straight male connector M12, 4 pins                                 |
| Collar material                    | Metal   |
| Status LED                         | Without   |
| Cable connection                   | Screw terminal / wire size <= 0.75 mm² / clamping capacity 3...6 mm |

Complementary

|                                |                      |
|--------------------------------|----------------------|
| Cable gland type               | Pg 7                 |
| Cable connector fixing         | Screw-on             |
| [Ue] rated operational voltage | 125 V AC<br>150 V DC |
| [In] rated current             | 3 A                  |
| Enclosure material             | Plastic              |
| Insulating resistance          | > 1000 GΩ            |
| Contact resistance             | <= 8000 μOhm         |
| Product weight                 | 0.025 kg             |


Environment

|                                       |             |
|---------------------------------------|-------------|
| IP degree of protection               | IP67        |
| ambient air temperature for operation | -40...85 °C |

Offer Sustainability

|                          |   |
|--------------------------|---|
| Sustainable offer status | Not Green Premium product   |
| RoHS (date code: YYWW)   | Compliant - since 0726 - Schneider Electric declaration of conformity |

Dimensions

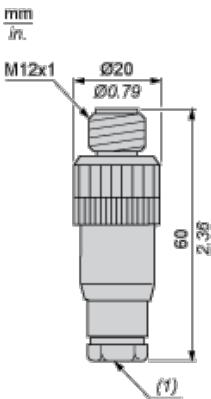

(1) Cable gland : no. 7 plastic (Pg 7)

Connections and Schemes

