

## XZCP0666L5

pre-wired connectors XZ - elbowed female - M8 - 3  
pins - cable PUR 5m



### Main

|                                    |                      |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory    |
| Accessory / separate part type     | Pre-wired connectors |
| Series name                        | General purpose      |

### Complementary

|                                |                                     |
|--------------------------------|-------------------------------------|
| Electrical connection          | M8, 3 pins elbowed female connector |
| Cable connector fixing         | Screw-on                            |
| Collar material                | Metal                               |
| Status LED                     | Without                             |
| Cable length                   | 5 m                                 |
| Cable outer diameter           | 5.2 mm                              |
| Cable composition              | 3 x 0.34 mm <sup>2</sup>            |
| Wire insulation material       | PUR                                 |
| [Ue] rated operational voltage | 60 V AC<br>75 V DC                  |
| [In] rated current             | 4 A                                 |
| Contact resistance             | 5000 µOhm                           |
| Insulating resistance          | 1 GΩ                                |
| Product weight                 | 0.12 kg                             |

### Environment


|                                       |                                              |
|---------------------------------------|----------------------------------------------|
| IP degree of protection               | IP65<br>IP67<br>IP69K                        |
| product certifications                | CULus                                        |
| ambient air temperature for operation | -40...80 °C (static)<br>-5...80 °C (flexing) |
| ambient air temperature for storage   | -40...80 °C                                  |

### Offer Sustainability

|                                  |                                                                       |
|----------------------------------|-----------------------------------------------------------------------|
| Sustainable offer status         | Green Premium product                                                 |
| RoHS (date code: YYWW)           | Compliant - since 0649 - Schneider Electric declaration of conformity |
| REACH                            | Reference not containing SVHC above the threshold                     |
| Product environmental profile    | Available                                                             |
| Product end of life instructions | Available                                                             |

### Dimensions


The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

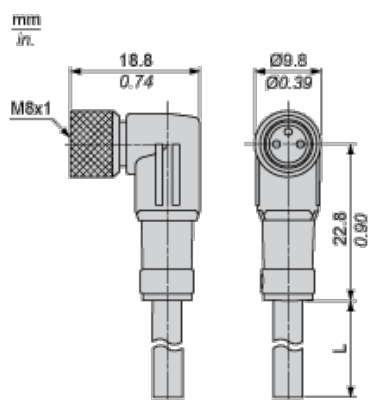

L : Length of cable

## Connections and Schemes

### Connector



BU : Blue

BN : Brown

BK : Black