

XZCPA1141L10

pre-wired connectors XZ - straight female - M12 - 4 pins - cable PVC 10m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

Complementary

Electrical connection	M12, 4 pins straight female connector
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	10 m
Cable outer diameter	5.3 mm
Cable composition	4 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Contact resistance	5000 µOhm
Insulating resistance	1 GΩ
Product weight	0.37 kg


Environment

IP degree of protection	IP69K
ambient air temperature for operation	-25...85 °C (static)
ambient air temperature for storage	-35...100 °C

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0601 - Schneider Electric declaration of conformity


Dimensions

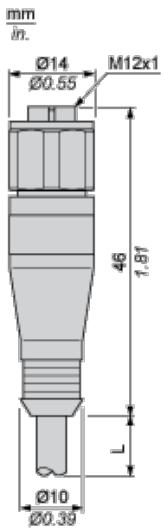

L : Length of cable

Connections and Schemes

Connector



BN : Brown

BK : Black

BU : Blue

WH : White