



Main

Range of product	Advantys Telefast ABE7
Product or component type	Solid state output relay sub-base
[Us] rated supply voltage	24 V DC (PLC end) 24 V DC (preactuator end)
Number of channels	16
Relay type	Soldered solid state relay

Complementary

Terminal block type	Removable
Isolation PLC/operative part	No
Fixing mode	By clips on 35 mm symmetrical DIN rail By screws on solid plate with fixing kit
Width	125 mm
Current state 0 guaranteed	0.4 mA (PLC end)
Voltage state 0 guaranteed	3.4 V (PLC end)
Current state 1 guaranteed	3.1 mA (PLC end)
Voltage state1 guaranteed	16.9 V (PLC end)
Current per output common	<= 9 A
Current per channel	0.5 A (preactuator end)
Minimum switching current	1 mA
Drop-out voltage	<= 0.3 V (preactuator end)
Maximum switching current	700 mA DC-12 700 mA DC-13
Tungsten load	10 W DC-6
Residual current	<= 0.5 mA (preactuator end)
Fault type	Overload Short-circuit
Fault indication	Without
Switchable inductive energy L/R	<= 400(U.I) ms
Circuit breaker threshold	>= 0.75 A
Response time	<= 0.1 ms from state 1 to 0 <= 0.2 ms from state 0 to 1
Switching frequency	< 0.6/LI² Hz
Installation category	II conforming to IEC 60664-1
Tightening torque	0.6 N.m (with flat Ø 3.5 mm)
Product weight	0.4 kg

Environment

product certifications	BV CSA DNV GL LROS (Lloyds register of shipping) UL
IP degree of protection	IP2x conforming to IEC 60529


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

protective treatment	TC
resistance to incandescent wire	750 °C, extinction time: < 30 s conforming to IEC 60695-2-11
shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
resistance to electrostatic discharge	4 kV (contact) conforming to IEC 61000-4-2 level 3 8 kV (air) conforming to IEC 61000-4-2 level 3
resistance to radiated fields	10 V/m (26000000...1000000000 Hz) conforming to IEC 61000-4-3 level 3
resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
ambient air temperature for operation	-5...60 °C conforming to IEC 61131-2
ambient air temperature for storage	-40...80 °C conforming to IEC 61131-2
pollution degree	2 conforming to IEC 60664-1

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0841 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Dimensions

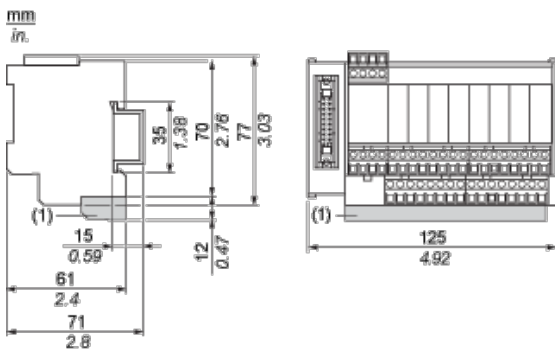


(1) ABE7BV20 / ABE7BV20E


Mounting

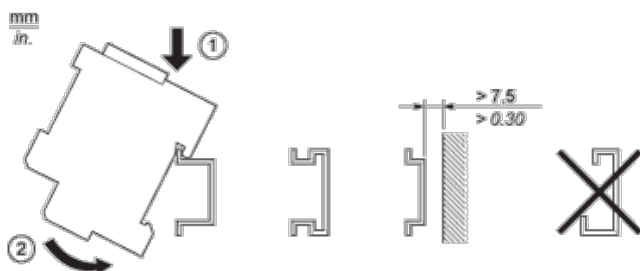

HE10 16 Channels




Wiring Diagram

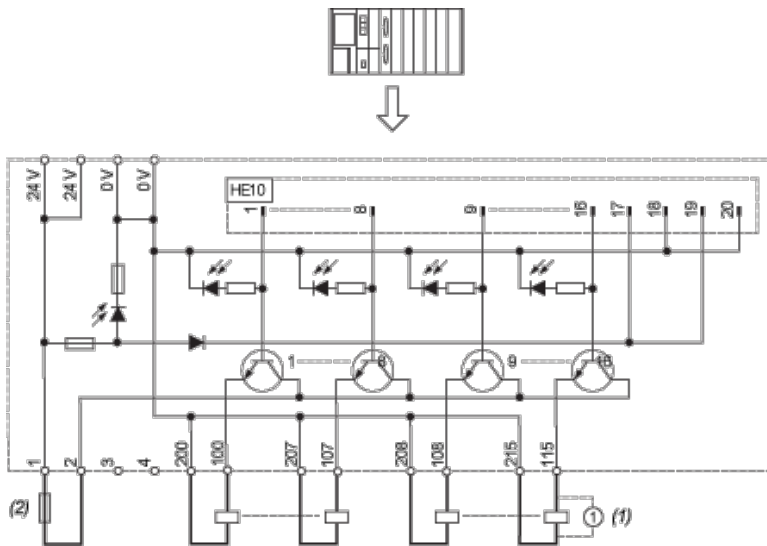

- (1) Inductive load
- (2) AB1FUSE435U5X + quick acting FUSE 5 x 20 type F.

Curves for Determining Cable Type and Length According to the Current

16-channel Sub-base

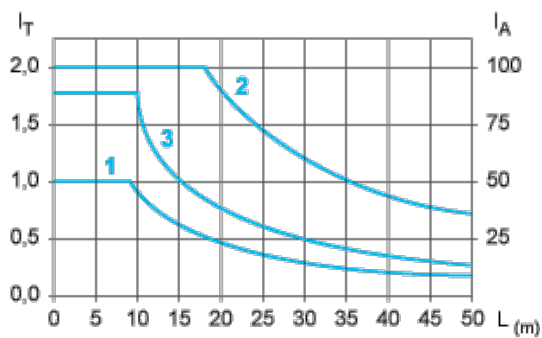

- L Cable length
- I_T Total current per sub base (A)
- I_A Average current per channel (mA)
- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm² (AWG 28).
- (2) TSXCDP••3 cables with c.s.a. 0.34 mm² (AWG 22).
- (3) Cables with c.s.a. 0.13 mm² (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.