


LV429408

undervoltage release MN - 440..480V 60Hz,
380..415V 50/60Hz

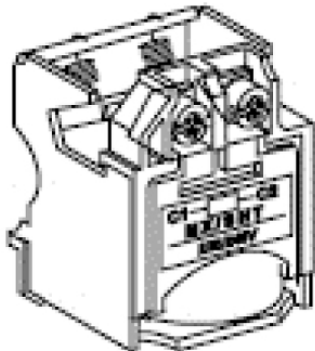

Main

Device short name	MN
Product or component type	Voltage release
Device application	Control
Range compatibility	Easypact CVS PowerPact Multistandard Compact NSX
Voltage release type	Undervoltage release
[Uc] control circuit voltage	380...415 V AC 440...480 V AC

Complementary

Threshold tripping voltage	0.35...0.7 x Un - during opening time 0.85 x Un - during closing time
Supply holding power	5 W
Supply inrush power	30 W
Mounting mode	Fixed
Response time	50 ms
Auxiliary connection terminal	Screw terminal 0...1.5 mm ²

Environment

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0835 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.