

Code	Watts (W)	Finish	Burning Position	Product Description	Lamp Voltage (V)	Lamp Current (A)	Initial Lumens (lm)	Colour Temp. (K)	Colour Rendering (Ra)	Life (hrs)	Efficacy (lm/W)	Base	Fig
------	-----------	--------	------------------	---------------------	------------------	------------------	---------------------	------------------	-----------------------	------------	-----------------	------	-----

Sunlux - BT & Elliptical Clear For use with High Pressure Sodium Control Gear (IEC 60662)

HPS	-	400	Clear	Universal	NH400	105	4.45	50000	2100	25	24000	125	E40	3
	120020	1000	Clear	Universal	NH1000	110	10.30	133000	2100	25	24000	133	E40	4

Sunlux - BT & Elliptical Coated For use with High Pressure Sodium Control Gear (IEC 60662)

HPS	120051	70	Coated	Universal	NH70F/HV/70H	90	0.98	5800	2100	17	16000	82	E27	1
	120060	150	Coated	Universal	NH150F	100	1.80	14000	2100	25	24000	93	E40	2
	120065	250	Coated	Universal	NH250F	100	3.00	25800	2100	25	24000	103	E40	2
	120070	400	Coated	Universal	NH400F	105	4.45	47800	2100	25	24000	119	E40	3
	120075	1000	Coated	Universal	NH1000F	110	10.30	125000	2100	25	24000	125	E40	4

Sunlux - Tubular For use with High Pressure Sodium Control Gear (IEC 60662)


HPS	120150	70	Clear	Universal	NHT70	90	0.98	6000	2100	17	16000	85	E27	5
	120155	100	Clear	Universal	NHT100	100	1.20	10000	2100	17	24000	100	E40	6
	120160	150	Clear	Universal	NHT150	100	1.80	14500	2100	25	24000	96	E40	6
	120165	250	Clear	Universal	NHT250	100	3.00	27500	2100	25	24000	110	E40	7
	120170	400	Clear	Universal	NHT400	100	4.60	50000	2100	25	24000	125	E40	8
	120175	1000	Clear	Universal	NHT1000	100	10.6	133000	2100	25	24000	133	E40	9

Sunlux B lamp for use with Constant Wattage High Pressure Sodium Control Gear (IEC 60662)

HPS	120180	1000	Clear	Universal	NHT1000B	250	4.7	140000	2100	25	24000	140	E40	10
-----	--------	------	-------	-----------	----------	-----	-----	--------	------	----	-------	-----	-----	----

- Pictorial is representative only. Specifications may change without notice.

DIMENSIONS

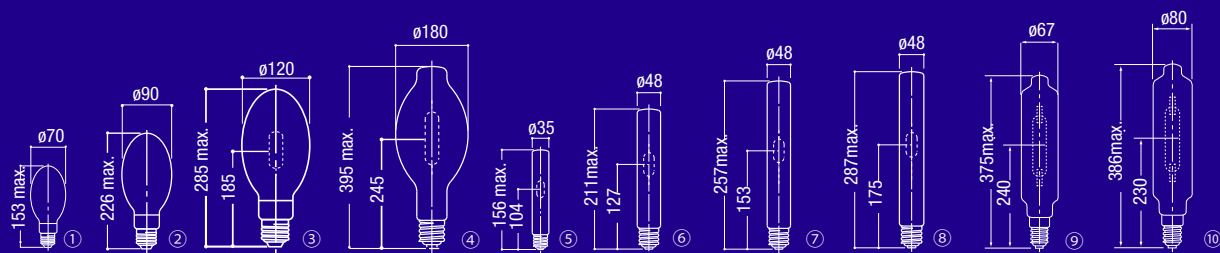

BURNING POSITION




UNIVERSAL



For the latest product information visit www.eyelighting.com.au

EXPLANATIONS



M.O.L. :
Maximum Overall Length
L.C.L. :
Light Centre Length
(top of base fins)