

NESS ACCESS CONTROL

NESS ACCESS CONTROL PRODUCTS

NESS *ultraProx*™ ACCESS CONTROL SYSTEM

UNIVERSAL WEIGAND READER



PROXIMITY READER

NESS ULTRAPROX™ WEIGAND READER

The Ness UltraProx Weigand Reader is a compact, technically advanced Proximity access control reader with 26-bit Weigand output for use with a separate controller.


Compatible with Ness X Series control panels and most other access controllers.

The reader is built into a small footprint mullion mount housing and is fully sealed for outdoor use.

101-014 NESS ULTRAPROX™ WEIGAND READER

SPECIFICATIONS	101-014 Ultraprox™ Weigand Reader
CARD COMPATIBILITY / READ RANGE	100-274 Keyfob / 5cm 100-272 Clamshell card / 10cm 100-273 ISO Read/Write card / 10cm 101-045 ISO card / 10cm
FREQUENCY	125kHz
CARD READ TIME	64bits < 50msec
OUTPUT	26-bit Weigand
LED / BEEPER	User defined green LED / Piezo Beeper
INPUT VOLTAGE	12-16V DC Regulated linear power supply
CURRENT CONSUMPTION	50mA
DIMENSIONS	48(W) x 82(H) x 24(D) mm each unit
WEIGHT	70g

Connection to the Ness D8x/D16x control panels

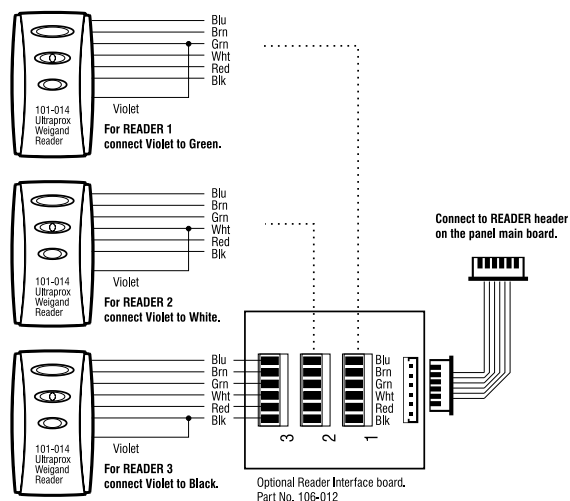

SYDNEY 02 8825 9222
sales@ness.com.au

MELBOURNE 03 9875 6400
nessmelb@ness.com.au

BRISBANE 07 3399 4910
nessbris@ness.com.au

PERTH 08 9328 2511
nessper@ness.com.au

ADELAIDE 08 8277 7255
adelaide@ness.com.au

NZ (NFS) +64 9 573 0401
sales@nfs.co.nz



Access Control Products

www.ness.com.au



Quality
Endorsed
Company

ISO9001
LIC No. 0820074
NSW Head Office only