


Catalogue No: 700-HLT22Z24

INTERFACE RELAY 10A 2CO 24V DC COIL SPRING CLAMP

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Allen-Bradley Electromechanical Relays > 700-HL Slim Terminal Block Interface Relay - 1 N/O > 700-HLT12/22 Relays - DPDT

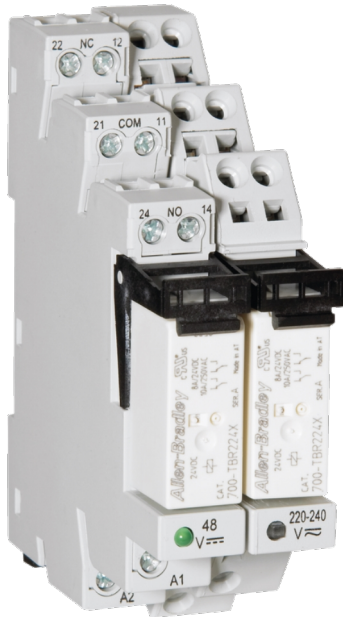

Representative Photo Only
(actual product may vary based on configuration selections)

Terminal Block Relay, Electromechanical Type, Spring Clamp Terminal, DPDT, 24V DC, Touch Safe Terminal Construction.

- Tested to a range of international standards to ensure compliance and reliability in application
- Wide range of relays that provides reliable design, quick replacements and panel space-saving solutions
- Various types of relays in the range which cover application requirements from PLC switching to high current loads

SPECIFICATIONS

| | |
|---|---|
| Product Series | Bul. 700-HL |
| Component Type Timers and Control relays | Relay |
| Contact Configuration | 2 CO |
| In, Rated Current | 10 A |
| Ie, Rated Operational Current, AC-1, 250V | 10 A@250V |
| Rated Load, AC-1 | 2500 VA |
| Ie, Rated Operational Current, AC-15, 230V | 3 A@230V |
| Rated Load, AC-15 | 690 VA |
| Coil Type | DC |
| Coil Voltage, DC, Nom | 24 V DC |
| Coil Voltage, DC, Min | 19.2 V DC |
| Coil Voltage, DC, Max | 26.4 V DC |
| Material, Contacts | Silver Tin Oxide (AgSnO ₂) material |
| Mechanical Service Life | 10000000 cycles |
| Electrical Service Life at Un, In | 100000 cycles |
| IP Rating | IP20 |
| Total Making Time | 7 ms |
| Total Breaking Time | 3 ms |
| Insulation Voltage, between Coil & Contacts | 250 V |
| Dielectric Strength, between open Contacts | 1000 V AC |
| Mounting | Plug-in |
| Operating Temperature, Min | -40 °C min |
| Operating Temperature, Max | 55 °C max |
| Storage Temperature, Min | -40 °C min |
| Storage Temperature, Max | 100 °C max |
| Height | 76 mm |
| Width | 93 mm |
| Depth | 6.2 mm |

Catalogue No: **700-HLT22Z24**

INTERFACE RELAY 10A 2CO 24V DC COIL SPRING CLAMP

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Allen-Bradley Electromechanical Relays > 700-HL Slim Terminal Block Interface Relay - 1 N/O > 700-HLT12/22 Relays - DPDT



| | |
|----------------------|--|
| Standards Compliance | EN 61810-1 CSA C22.2 No. 14 UL 508 |
| Certifications | C-UL-US CE |
| Shipping Approvals | ABS (American Bureau of Shipping) |

REFERENCES

IECEX Certificate -

Supplier Declaration of Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue & Product Selection: -