Catalogue No: **800F-D0C**

INCANDESCENT MODULE LATCH MOUNT NO BULB

Representative Photo Only
(actual product may vary based on configuration selections)

INCANDESCENT MODULE NO LAMP

- The 800F range of 22.5mm operator control devices includes a diverse range of products making it suitable for use in a wide range of applications. Products in the range include pushbuttons, selector switches, pilot lights, emergency stop operators and more.
- Operators are available in both plastic (800FP) and metal (800FM) variants.

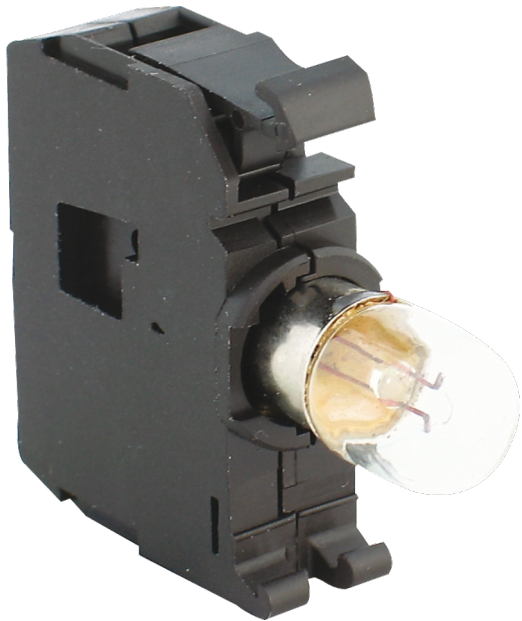| SPECIFICATIONS	
Product Series	800F
Component Type Pushbutton and Pilot Lights	Lamp Module
Ubmax, Service Voltage, AC, Max	250 V AC
Power Consumption, Max	2 W
Lamp Holder	Ba9s
Luminous Intensity	360 mcd
RoHS Approved	Yes
CE Marked	Yes
Operating Temperature, Max	70 °C max
Operating Temperature, Min	-25 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative Humidity, Min	50 %RH
Relative Humidity, Max	95 %RH
Shock Acceleration (Max.)	100 g
Shock Duration (Max.)	11 ms
Vibration Acceleration (Max.)	10 m/s²
Vibration Displacement (Peak to Peak Max.)	1.52 mm
Vibration Frequency, Operational (Max.)	2000 Hz
Vibration Duration (Max.)	180 min
Standards Compliance	NEMA ICS-5 UL 508 EN 60947-1 EN 60947-5-1 EN 60947-5-5 IEC 60947-1 ISO 13850

Catalogue No: **800F-D0C**

INCANDESCENT MODULE LATCH MOUNT NO BULB

Operator Control Devices > Pushbuttons and Control Switches > Pushbuttons and Pilot Lights > Allen-Bradley 800F
Pushbuttons and Pilot Lights > 800F Integrated Lamp Modules for use with Pilot Lights > Full Voltage Lamp Module
(Less Ba9s Lamp)

Certifications	UR UL CSA CCC CE RoHS
Shipping Approvals	ABS (American Bureau of Shipping)

REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	800F_Manufacturer Datasheet
Manufacturer Catalogue & Product Selection:	800FD0C_Manufacturer Product Selection Guide