


# Catalogue No: **800TC-XA**

## CONTACT BLOCK FS SHALLOW 1NO 1NC

Operator Control Devices > Pushbuttons and Control Switches > Pushbuttons and Pilot Lights > Allen-Bradley  
800T/800H Pushbuttons > Accessories > 800T/H Contact Blocks



### Contact Block For 800T/H Shallow 1NO 1NC

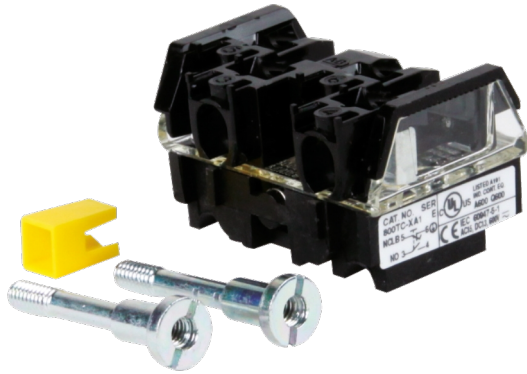

- 800T (metal) and 800H (plastic) 30.5mm product lines are designed and constructed to perform in the most demanding industrial environments.
- Button caps made from thermoplastic polyester resin and deliver excellent resistance to corrosive agents and ensure color identification is never lost.
- Operator bushings are made from die cast zinc alloy giving strength and stability in installation.
- Riveted construction of the operator bushing, diaphragm seal and base plate, by four secure steel rivets, provides increased durability and tamper resistance.

Representative Photo Only  
(actual product may vary based on configuration selections)

#### SPECIFICATIONS

Product Series	800T
Component Type Pushbutton and Pilot Lights	Contact Block
Contact Configuration	1 NO + 1 NC
Self Monitoring	No Y / N
Un, Nominal Operational Voltage, AC	600 V AC
Un, Nominal Operational Voltage, DC	600 V DC
Contact Breaking Capacity, AC15, 110V	6.54 A
Contact Breaking Capacity, AC15, 120V	6 A
Contact Breaking Capacity, AC15, 240V	3 A
Contact Breaking Capacity, AC15, 415V	1.73 A
Contact Breaking Capacity, DC13, 24V	2.5 A
Contact Breaking Capacity, DC13, 30V	2.3 A
Contact Breaking Capacity, DC13, 110V	0.63 A
Contact Breaking Capacity, DC13, 120V	0.58 A
Contact Breaking Capacity, DC13, 220V	0.31 A
Compatible Product Series	800T / H compatible
Operating Temperature, Max	55 °C max
Operating Temperature, Min	-40 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative humidity, min	50 %RH
Relative Humidity, Max	95 %RH
IP Rating	IP2X
Shock Acceleration (Max.)	100 g
Shock Duration (Max.)	11 ms
Vibration Acceleration (Max.)	10 m/s <sup>2</sup>
Vibration Displacement (Peak to Peak Max.)	1.52 mm
Vibration Frequency, Operational (Max.)	2000 Hz

# Catalogue No: **800TC-XA**

## CONTACT BLOCK FS SHALLOW 1NO 1NC

Operator Control Devices > Pushbuttons and Control Switches > Pushbuttons and Pilot Lights > Allen-Bradley  
800T/800H Pushbuttons > Accessories > 800T/H Contact Blocks



Standards Compliance	UL 508 CSA C22.2 No. 14 EN 60947-5-1 EN 60947-5-5 ISO 13850
----------------------	---

Certifications	CE CSA UL CCC
----------------	------------------------

### REFERENCES

IECEx Certificate -

Supplier Declaration of  
Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: [800TCXA\\_Manufacturer Datasheet](#)

Manufacturer Catalogue  
& Product Selection: [800T/800H\\_Manufacturer Catalogue](#)